


| | | Qty | |
|------|---------|-----|--|
| | 32586C | | Cylinder (Incl. 2, 3, 4 & 76) (2-3/4" Bore) |
| | 27652 | | Pin, Dowel |
| 3 | 27642 | | Plug, Oil drain |
| 4 | 32630 | | Seal, Oil |
| 5 | 32783 | | Intake Valve (Std.) (Incl. 9) |
| | 32784 | | Intake Valve (1/32" OS) (Incl. 9) |
| | 27878A | | Exhaust Valve (Std.) (Incl. 9) |
| | 27880A | | Exhaust Valve (1/32" OS) (Incl. 9) |
| | 27882 | | Cap, Upper valve spring |
| | 20810 | | |
| | | | Pin, Valve spring retainer (Use as re quired) |
| | 27881 | | Spring, Valve |
| | 27881 | | Spring, Valve |
| | 32581 | | Cap, Lower valve spring |
| | 32581 | | Cap, Lower valve spring |
| 10A | 32590 | | Plate, Lock & Oil dipper (This plate may be replaced by |
| | | | 34242 oil dipper but 650662C screw must be used.) |
| 10 | 24242 | | Dippor Oil |
| | 34242 | | Dipper, Oil Cropkobet (Incl. 13.8.13) |
| | 32670 | | Crankshaft (Incl. 12 & 13) |
| | 29783 | | Crankshaft Gear Pin (Early production) |
| 13 | 27884 | | Gear, Crankshaft (Used in early production) This gear is |
| | | | servicable onlywhen it is pinned to the crankshaft. |
| 14A | 32592B | | Piston & Pin Ass'y. (Std.)(2-3/4")(In cl.16) |
| | 32593B | | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 32594B | | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 34517 | | Piston, Pin & Ring Set (Std.) (2-3/4" Bore) |
| | 34518 | | |
| | | | Piston, Pin & Ring Set (.010" OS) |
| | 34519 | | Piston, Pin & Ring Set (.020" OS) |
| | 32595 | | Ring Set (Std.) (2-3/4" Bore) |
| | 32596 | | Ring Set (.010" OS) |
| | 32597 | | Ring Set (.020" OS) |
| | 27888 | | Ring, Piston pin retaining |
| 17 | 32591C | | Rod Assy., Connecting (Incl. 10 & 18) |
| 18 | 650662C | | Screw, Connecting rod (2 each) |
| | 32115 | | Camshaft (MCR) |
| 22 | 34034 | | Lifter, Valve |
| | 31303B | | Cover, Cylinder (Incl. 24, 106 & 279) |
| | 31546 | | Bushing, Crankshaft (Use as required) |
| | 28427 | | Seal, Oil |
| | 29668 | | Dipstick, Oil (Incl. 30) |
| | 30684 | | * Gasket, Cylinder cover |
| | 650488 | | Screw, 1/4-20 x 1-1/4" |
| | 29673 | | * Gasket, Oil filler |
| | 650489 | | Screw, 1/4-20 x 5/8" |
| | 32631A | | · |
| | | | * Gasket, Cylinder head |
| | 30938A | | Head, Cylinder |
| | 27793 | | Clip, Conduit (Use as required) |
| | 28942 | | Screw, 10-32 x 3/8" (Use as required) |
| | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as required) |
| | 650695A | | Screw, 5/16-18 x 2-1/4" (Use as requi red) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| 37 | 33636 | | Resistor Spark Plug (RJ-8C) |
| 37 | 34251 | | Resistor Spark Plug |
| | 27896A | | * Gasket, Breather cover |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Valve spring |
| | 650690 | | Washer, Belleville (Use as required) |
| 72/1 | 00000 | | racio, Donovino (Oco do roquilou) |

| Dof # | Port Number | Otry Doo | agription |
|-------|---------------|----------|--|
| | Part Number 0 | | scription asher (Use as required) |
| | 650691 | | · · · · · · · · · · · · · · · · · · · |
| | | | sher, Flat (Use as required) |
| | 650128 | | rew, 10-24 x 1/2" |
| | 27915A | | asket, Intake |
| | 30195A | | nge, Carburetor (Incl. 79 & 80) |
| | 30196 | | rew, 5/16-18 x 3/4" |
| | 29716 | | rew, 1/4-28 x 7/16" |
| 50 | 650548 | Scre | rew, 8-32 x 5/16" |
| 52 | 32326A | Leve | ver, Governor (New lever does not need 1 of |
| | | | 66,132,164,165,207) |
| 55 | 30205 | Bro | nakat Adjustina |
| | 32327 | | acket, Adjusting |
| | | | k, Throttle |
| | 29216 | - | t, Lock, 10-32 |
| | 650152 | | rew, 8-32 x 3/8" |
| | 29826 | | rew, 10-32 x 3/4" |
| | 29642 | | g, Retaining |
| 63A | 30699C | Rod | d Assy., Governor (Incl. 64 & 65) |
| 63 | 30699B | Gov | vernor Rod Ass'y. (This one-piece governor rodis no longer |
| | | use | ed. It is replaced by 30699C ass'y.,Ref. no. 63A) |
| 64 | 30700 | Volc | (a. Cavarnar |
| | | | ke, Governor |
| | 650494 | | rew, 6-40 x 5/16" |
| | 29918 | | ckwasher, #8 E.T. |
| | 35350 | | pe, Breather |
| | 29747B | Scre | rew, 5/16-24 x 21/32" |
| 70 | 32158E | Blov | wer Housing (For elec.star.)(Incl. 134,135) |
| 71 | 650815 | Was | sher, Belleville |
| 72 | 8116 | Nut, | t, Hex |
| 73 | 29536 | Blov | wer Housing Baffle (without electric starter knock-out) |
| | | | se as required) |
| 70 | 050504 | • | . , |
| 73 | 35256A | | wer Housing Baffle (with electric starter knock-out) (Use |
| | | as r | required) (Point Ignition) |
| 74 | 650561 | Scre | rew, 1/4-20 x 5/8" |
| | 31688A | | asket, Carburetor |
| | 29752 | | t & Lockwasher Assy., 1/4-28 |
| | 650572 | | rew, 1/4-28 x 1-1/8" |
| | 730164 | | Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89, 90A & 331B) |
| 02/1 | 730104 | | se as required) |
| | | (030 | se as required) |
| 83 | 27272A | * Ga | asket, Air cleaner |
| 87 | 31691 | Brad | acket, Air cleaner NOTE: 130010 thru 10C & 11 used in |
| | | early | ly production only. |
| 00 | 28820 | Core | 20w 10 22 v 1/2" |
| | | | rew, 10-32 x 1/2" |
| | 30727 | | ment, Air cleaner |
| | 31715 | | dy, Air cleaner |
| | 31582 | | ound Wire |
| | 29538 | | se, Engine mounting |
| | 32401 | Muf | |
| 106 | 31845 | Sha | aft, Mechanical governor |
| 107 | 31947 | Gea | ar Assy., Governor |
| 108 | 32324 | | ool, Governor |
| | 29193 | • | g, Retaining |
| | 650561 | | rew, 1/4-20 x 5/8" |
| | 31301 | | el Tank (Incl. 115) |
| | 410144B | | el Cap (White Plastic)(Std)(As requ ired) |
| . 10 | | . 40 | |

| Ref # | Part Number C | ty Description |
|-------|---------------|--|
| 115 | 33032 | Fuel Cap (Charcoal Plastic) (Spurt resistant, Low profile) |
| | | (Use as required) |
| 115 | 34210 | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
| | | required) |
| 115 | 35355 | Fuel Cap (Use as required) |
| | 28584 | Fitting, Fuel strainer & elbow |
| | 29774 | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.) |
| | 30705 | Fuel Line (Braided 16") (41 cm) (Use as req.) |
| | 30962 | Fuel Line (Braided 32") (81 cm) (Use as req.) |
| | 650128 | Screw, 10-24 x 1/2" (Use as required) |
| | 30622A | Extension, Blower housing |
| | 650542 | Screw, 5/16-18 x 3/4" |
| | 27930A | Gasket, Exhaust |
| | 30196 | Screw, 5/16-18 x 3/4" |
| | 26073 | Washer (Use as required) |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 32589 | Key, Flywheel |
| | 31843A | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 650493 | Screw, 1/4-20 x 1-3/4" |
| | 30747 | Clip, Shorting |
| | 610118 | Cover, Spark plug (Use as required) |
| | 27276 | Cover, Spark plug |
| | 650561 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 30939A | Cover, Cylinder head |
| | 32125 | Cup, Starter |
| | 590417 | Screen, Starter cup |
| | 26460 | Clamp, Fuel line |
| | 31461 | Bushing, Crankshaft (Use as required) |
| | 610973 | Terminal Ass'y. (As req. on late prod uction) |
| | 27275 | Clip, Hi-tension wire (Use as require d) |
| | 34246 | Clip, Ground wire (Use as required) |
| | 550223 | Decal, Name |
| | 34346 | Decal, Instruction |
| | 31752 | Decal, Air cleaner |
| | 30547A | Contact Assy., Breaker |
| | 30548B | Condenser |
| | 631021 | Inlet Needle, Seat & Clip Assy. |
| 336 | 631453 | Carburetor (Incl. 75) (Refer to Division 5, Section A, page 100 |
| | | for breakdown) |
| 337 | 610694A | Magneto (w/ring gear for 110 volt sta rter) NOTE: The |
| 001 | 01000-111 | complete magneto is not available as an assembly. The |
| | | magneto number is shown for reference purposes only. Order component parts individually, as show in parts list. |
| | | (Refer to Division 5, Section B, page 24 for breakdown) |
| 338 | 590420 | Rewind Starter (Refer to Division 5, Section C, page 25 for breakdown) |
| 343 | 33239A | Gasket Set (Incl. items marked*) |
| | | |



| Ref # | Part Number Qt | y Description |
|-------|----------------|--|
| 31 | 650489 | Screw, 1/4-20 x 5/8" |
| 34 | 27793 | Clip, Conduit (Use as required) |
| 35 | 28942 | Screw, 10-32 x 3/8" (Use as required) |
| 43A | 650128 | Screw, 10-24 x 1/2" |
| 48 | 29716 | Screw, 1/4-28 x 7/16" |
| 56 | 32327 | Link, Throttle |
| 71 | 650815 | Washer, Belleville |
| 72 | 8116 | Nut, Hex |
| 152 | 30063 | Screw, 1/4-20 x 1/2" |
| 193 | 610118 | Cover, Spark plug (Use as required) |
| 193 | 27276 | Cover, Spark plug |
| 239 | 33450 | Nut, Lock |
| | 30845A | Bolt, Governor adjusting |
| | 32329 | Spring, Governor bolt |
| 263 | 650764 | Nut, "U" Type (Use as required) |
| 274 | 610973 | Terminal Ass'y. (As req. on late prod uction) |
| 331 | 550223 | Decal, Name |
| 338 | 590420 | Rewind Starter (Refer to Division 5, Section C, page 25 for |
| | | breakdown) |
| 339 | 35765A | Electric Starter Motor (12 Volt) NOTE: The 29965, 32468, 32468B, 33606, 35765 and 35765A startermotors are used interchangeably on these models. Refer to service number stamped on end cap of motor, or on decal, for identification. Refer to Division 5, Section D for breakdown. |
| 340 | 33328D | Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel (see#342). Refer to service number stamped on end cap of motor, or on decal, for identifica |
| 342 | 30811A | Flywheel (Ring gear flywheel requiredon engines using 110-120 volt starter kits listed above) |
| 342 | 611042 | Flywheel (Used on Type letters H and above) (Std. Point ignition) (Ring gear flywheel required on engines using 110-120 volt starter kits listed above) |
| 342 | 611085 | Flywheel (Minimum ring gear flywheel required on engines using 110-120 volt starter kits listed above) (Use withSolid State ignition) |

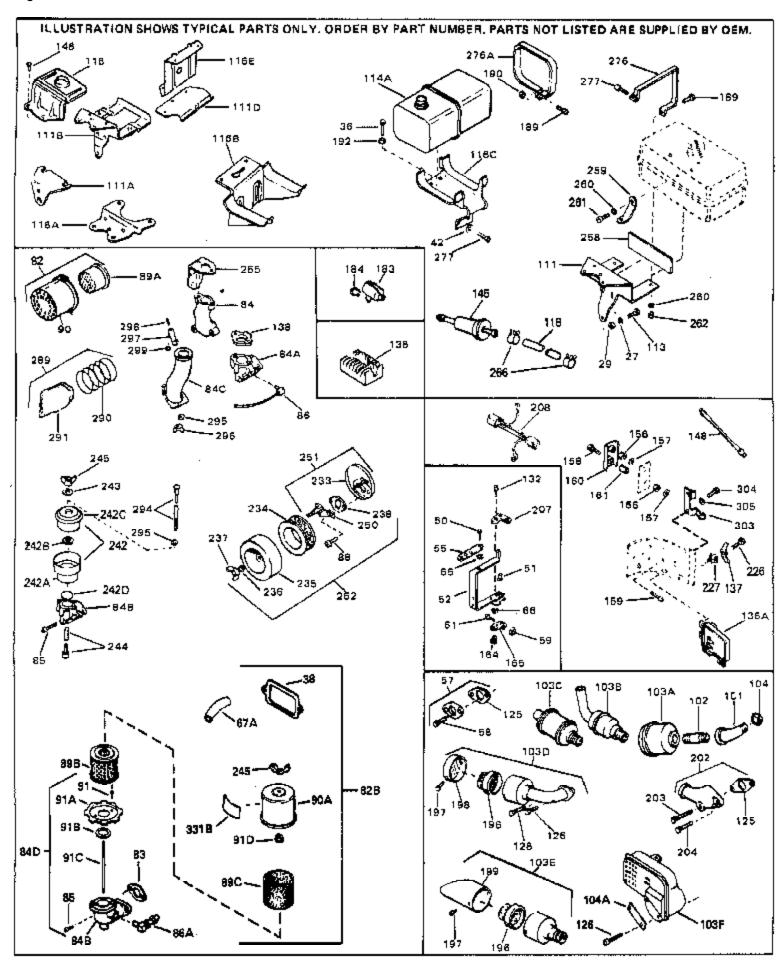

| Ref # | Part Number | Qty Description |
|---|--|---|
| 36 36 38 42 42 50 51 | 27513 650697A 650695A 650694A 27896A 26073 650691 650548 30319 32326A | Lockwasher, 1/4" (Use as required) Screw, 5/16-18 x 2-1/2" (Use as requi red) Screw, 5/16-18 x 2-1/4" (Use as requi red) Screw, 5/16-18 x 2" (Use as required) * Gasket, Breather cover Washer (Use as required) Washer, Flat (Use as required) Screw, 8-32 x 5/16" Rivet, Split (Used in early production) Lever, Governor (New lever does not need 1 of 51,66,132,164,165,207) |
| 57 58 59 61 66 | 30205 730130 30196 29216 29826 29918 730561 | Bracket, Adjusting Exh.Adap.Kit (Incl. 58 & 125) (Use as req.) Screw, 5/16-18 x 3/4" (Use as require d) Nut, Lock, 10-32 Screw, 10-32 x 3/4" Lockwasher, #8 E.T. Air cleaner kit (Incl. 38, 67A, 83, 84B, 85,89B, 89C, 90A, 91, 91A, 91B, 91C, 91D, 245 & 331B) (Use only on engines with an externally vented fully adjustable carburetor) |
| 82 | 730127 | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89A, 90, 238 & 331B) (Use as required) |
| | 27272A 34819 | * Gasket, Air cleaner Air Cleaner Elbow (Incl. 84B, 86A, 91, 91A, 91B & 91C) (Use in 730561 assembly only) |
| 90 103E 111 113 118 118 118 125 126 128 132 148 148 189 202 203 204 262 266 276 277 | 28820 31715 391026 31694 650561 29774 30705 30962 27930A 30196 650694A 650548 34067 34069 6201 31288 650697A 6021A 29752 26460 31697 29212 31752 | Screw, 10-32 x 1/2" Body, Air cleaner Opt. Spark Arrest Muffler (Incl.196,1 97,199) Bracket, Fuel tank Screw, 1/4-20 x 5/8" Fuel Line (Braided 8-1/4" 21 cm)(Use as req.) Fuel Line (Braided 16") (41 cm) (Use as req.) Fuel Line (Braided 32") (81 cm) (Use as req.) Gasket, Exhaust Screw, 5/16-18 x 3/4" Screw, 5/16-18 x 2" (Use as required) Screw, 8-32 x 5/16" (Early production) Wire Assy., Alternator adapter (4-1/4") Wire Assy., Alternator adapter (6-3/4") Screw, 1/4-28 x 7/8" Exh. Adaptor Kit (Incl.125,203,204) (As req.) Screw, 5/16-18 x 2-1/2" (Use as required) Screw, 5/16-18 x 1-1/2" (Use as required) Nut, Lock Clamp, Fuel line Strap, Fuel tank Screw, Hex hd. Sems, 1/4-28 x 7/16 Decal, Air cleaner |