


| | | Qty | Description |
|-----|---------|-----|--|
| | 32586C | | Cylinder (Incl. 2, 3, 4 & 76) (2-3/4" Bore) |
| | 27652 | | Pin, Dowel |
| 3 | 27642 | | Plug, Oil drain |
| 4 | 32630 | | Seal, Oil |
| 5 | 32783 | | Intake Valve (Std.) (Incl. 9) |
| | 32784 | | Intake Valve (1/32" OS) (Incl. 9) |
| | 27878A | | Exhaust Valve (Std.) (Incl. 9) |
| | 27880A | | Exhaust Valve (1/32" OS) (Incl. 9) |
| | 27882 | | Cap, Upper valve spring |
| | | | |
| | 20810 | | Pin, Valve spring retainer (Use as re quired) |
| | 27881 | | Spring, Valve |
| | 27881 | | Spring, Valve |
| | 32581 | | Cap, Lower valve spring |
| | 32581 | | Cap, Lower valve spring |
| | 34242 | | Dipper, Oil |
| 10A | 32590 | | Plate, Lock & Oil dipper (This plate may be replaced by |
| | | | 34242 oil dipper but 650662C screw must be used.) |
| 11 | 32680A | | Crankshaft (Incl. 12 & 13) |
| | 29783 | | · · · · · · · · · · · · · · · · · · · |
| | | | Crankshaft Gear Pin (Early production) |
| 13 | 27884 | | Gear, Crankshaft (Used in early production) This gear is |
| | | | servicable onlywhen it is pinned to the crankshaft. |
| 14A | 32592B | | Piston & Pin Ass'y. (Std.)(2-3/4")(In cl.16) |
| | 32593B | | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 32594B | | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 34517 | | Piston, Pin & Ring Set (Std.) (2-3/4" Bore) |
| | 34518 | | Piston, Pin & Ring Set (Old.) (2 3/4 Bole) |
| | 34519 | | |
| | | | Piston, Pin & Ring Set (.020" OS) |
| | 32595 | | Ring Set (Std.) (2-3/4" Bore) |
| | 32596 | | Ring Set (.010" OS) |
| | 32597 | | Ring Set (.020" OS) |
| | 27888 | | Ring, Piston pin retaining |
| | 32591C | | Rod Assy., Connecting (Incl. 10 & 18) |
| 18 | 650662C | | Screw, Connecting rod (2 each) |
| 19 | 32678 | | Nipple, Oil drain |
| 20 | 30969 | | Cap, Oil drain |
| | 32115 | | Camshaft (MCR) |
| | 34034 | | Lifter, Valve |
| | 31303B | | Cover, Cylinder (Incl. 24, 106 & 279) |
| | 28427 | | Seal, Oil |
| | 31546 | | Bushing, Crankshaft (Use as required) |
| | 31297 | | Dipstick, Oil (Incl. 30) |
| | 30684 | | |
| | 650488 | | * Gasket, Cylinder cover Screw, 1/4-20 x 1-1/4" |
| | | | |
| | 29673 | | * Gasket, Oil filler |
| | 650489 | | Screw, 1/4-20 x 5/8" |
| | 32631A | | * Gasket, Cylinder head |
| | 30938A | | Head, Cylinder |
| | 27793 | | Clip, Conduit (Use as required) |
| | 28942 | | Screw, 10-32 x 3/8" (Use as required) |
| 36 | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as requi red) |
| 36 | 650695A | | Screw, 5/16-18 x 2-1/4" (Use as required) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 33636 | | Resistor Spark Plug (RJ-8C) |
| | 34251 | | Resistor Spark Plug |
| | 27896A | | * Gasket, Breather cover |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| 40 | 20727 | | LIGHTORI, DICALICI |

| Rof # | Part Number | Ot√ | Description |
|-------|-------------|-----|---|
| | 28425 | Qty | Cover, Valve spring |
| | 26073 | | Washer (Use as required) |
| | | | |
| | 650691 | | Washer, Flat (Use as required) |
| | 650690 | | Washer, Belleville (Use as required) |
| | 650128 | | Screw, 10-24 x 1/2" |
| 45 | 27915A | | * Gasket, Intake |
| 46 | 30195A | | Flange, Carburetor (Incl. 79 & 80) |
| 47 | 30196 | | Screw, 5/16-18 x 3/4" |
| 48 | 29716 | | Screw, 1/4-28 x 7/16" |
| | 650548 | | Screw, 8-32 x 5/16" |
| | 32326A | | Lever, Governor (New lever does not need 1 of |
| 02 | 02020/1 | | 51,66,132,164,165,207) |
| EE | 20205 | | • |
| | 30205 | | Bracket, Adjusting |
| | 30824 | | Link, Throttle |
| | 29216 | | Nut, Lock, 10-32 |
| 61 | 29826 | | Screw, 10-32 x 3/4" |
| 62 | 29642 | | Ring, Retaining |
| 63A | 30699C | | Rod Assy., Governor (Incl. 64 & 65) |
| 63 | 30699B | | Governor Rod Ass'y. (This one-piece governor rodis no longer |
| | | | used. It is replaced by 30699C ass'y.,Ref. no. 63A) |
| 64 | 30700 | | Yoke, Governor |
| | 650494 | | Screw, 6-40 x 5/16" |
| | 29918 | | |
| | | | Lockwasher, #8 E.T. |
| | 35350 | | Tube, Breather |
| | 29747B | | Screw, 5/16-24 x 21/32" |
| | 32158E | | Blower Housing (For elec.star.)(Incl. 134,135) |
| 71 | 650815 | | Washer, Belleville |
| 72 | 8116 | | Nut, Hex |
| 73 | 29536 | | Blower Housing Baffle (without electric starter knock-out) |
| | | | (Use as required) |
| 73 | 35256A | | Blower Housing Baffle (with electric starter knock-out) (Use |
| .0 | 662667 (| | as required) (Point Ignition) |
| 7/ | 650561 | | Screw, 1/4-20 x 5/8" |
| | | | • |
| | 31688A | | * Gasket, Carburetor |
| | 29752 | | Nut & Lockwasher Assy., 1/4-28 |
| | 650572 | | Screw, 1/4-28 x 1-1/8" |
| 82A | 730164 | | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89, 90A & 331B) |
| | | | (Use as required) |
| 97 | 34131 | | Ground Wire |
| | 29538 | | Base, Engine mounting |
| | 32401 | | Muffler |
| | 31845 | | Shaft, Mechanical governor |
| | | | · · · · · · · · · · · · · · · · · · · |
| | 30591 | | Gear Assy., Governor (Incl. 109) |
| | 30588A | | Spool, Governor |
| | 30590A | | Washer, Flat |
| | 29193 | | Ring, Retaining |
| 111C | 34158 | | Bracket, Fuel tank |
| 113 | 650561 | | Screw, 1/4-20 x 5/8" |
| 114 | 34156A | | Fuel Tank (Incl. 115 & 266) NOTE: These tanks were built |
| | | | with different size fuel inlet openings. Tanks with the 1-3/16" |
| | | | I.D. opening use fuel cap 33032 or 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355 or 35650. |
| 4.4= | 440444B | | |
| 115 | 410144B | | Fuel Cap (White Plastic)(Std)(As requ ired) |

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| | 33032 | Fuel Cap (Charcoal Plastic) (Spurt resistant, Low profile) |
| | | (Use as required) |
| 115 | 34210 | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
| | | required) |
| | 35355 | Fuel Cap (Use as required) |
| | 34159 | Plate, Fuel tank mounting |
| | 29774 | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.) |
| 118 | 30705 | Fuel Line (Braided 16") (41 cm) (Use as req.) |
| 118 | 30962 | Fuel Line (Braided 32") (81 cm) (Use as req.) |
| 120 | 650128 | Screw, 10-24 x 1/2" (Use as required) |
| 121 | 30622A | Extension, Blower housing |
| 124 | 650542 | Screw, 5/16-18 x 3/4" |
| 125 | 27930A | Gasket, Exhaust |
| 126 | 30196 | Screw, 5/16-18 x 3/4" |
| 127 | 26073 | Washer (Use as required) |
| 128 | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 32589 | Key, Flywheel |
| | 31843A | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 650493 | Screw, 1/4-20 x 1-3/4" |
| | 30747 | Clip, Shorting |
| | 650665 | Screw, 1/4-15 x 7/8" |
| | 610118 | Cover, Spark plug (Use as required) |
| | 650561 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 30939A | Cover, Cylinder head |
| | 32180C | Line, Primer |
| | 34126 | Bracket, Grommet mounting |
| | 650760 | Screw, 8-32 x 3/8" |
| | 28545 | Grommet |
| | 32125 | Cup, Starter |
| | 590417 | Screen, Starter cup |
| | 26460 | Clamp, Fuel line |
| | 31461 | Bushing, Crankshaft (Use as required) |
| | 610973 | Terminal Ass'y. (As req. on late prod uction) |
| | 27275 | Clip, Hi-tension wire (Use as require d) |
| | 34246 | Clip, Ground wire (Use as required) |
| | 34170 | Decal, Instruction |
| | 34346 | Decal, Instruction |
| | 30547A | Contact Assy., Breaker |
| | 30548B | Condenser |
| | 631021 | Inlet Needle, Seat & Clip Assy. |
| | 631920 | Carburetor (Incl. 75) (Refer to Division 5, Section A, page 138 |
| 330 | 031920 | for breakdown) |
| | | ioi bieakuowii) |
| 337 | 610694A | Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The |
| | | magneto number is shown for reference purposes only. |
| | | Order component parts individually, as show in parts list. |
| | | (Refer to Division 5, Section B, page 24 for breakdown) |
| | | |
| 338 | 590473 | Rewind Starter (Refer to Division 5, Section C, page 29 for |
| | | breakdown) |
| 343 | 33239A | Gasket Set (Incl. items marked*) |
| 3-10 | 0000071 | Sacros Sot (mon norma marrow) |



| Ref # | Part Number Qty | Description |
|------------------|-----------------|---|
| | 650489 | Screw, 1/4-20 x 5/8" |
| | 27793 | Clip, Conduit (Use as required) |
| | 28942 | Screw, 10-32 x 3/8" (Use as required) |
| | 650128 | Screw, 10-24 x 1/2" |
| | 29716 | Screw, 1/4-28 x 7/16" |
| | 30824 | Link, Throttle |
| | 650815 | Washer, Belleville |
| | | |
| | 8116 | Nut, Hex |
| | 33013 | Cover, Bubble |
| | 650736 | Screw, 10-16 x 3/8" |
| | 610118 | Cover, Spark plug (Use as required) |
| | 33108A | Control Bracket (Incl. 224 & 274) |
| | 32410 | Knob, Speed control |
| | 570629A | Primer Assy. |
| | 32180C | Line, Primer |
| | 30826 | Spring, Extension |
| | 650257 | Screw, 8-32 x 5/16" |
| | 34217 | Cover, Carburetor |
| | 32398 | Bracket, Choke |
| | 28820 | Screw, 10-32 x 1/2" |
| | 650765 | Screw, 10-32 x 1/2" |
| 256 | 650760 | Screw, 8-32 x 3/8" |
| 257 | 31291 | Plug, Cover |
| 263 | 650764 | Nut, "U" Type (Use as required) |
| 274 | 610973 | Terminal Ass'y. (As req. on late prod uction) |
| 282A | 34132 | Plate, Choke indicator |
| 292 | 34127 | Guard Starter |
| 293 | 32576 | Seal, Snow guard |
| 331 | 34170 | Decal, Instruction |
| 331G | 34416 | Decal, Choke |
| 331E | 34144 | Decal, Primer |
| 331H | 34414 | Decal, Warning |
| 338 | 590473 | Rewind Starter (Refer to Division 5, Section C, page 29 for |
| | | breakdown) |
| 340 | 33328D | Starter Motor Kit (110-120 Volt) This 110-120 volt starter |
| | | motor kit may have been added to this engine. It can be |
| | | added only if cylinder hasdrilled and tapped starter mounting |
| | | bosses and a ring gear flywheel (see#342). Refer to service |
| | | number stamped on end cap of motor, or on decal, for identifica |
| 242 | 30811A | |
| 342 | 300TIA | Flywheel (Ring gear flywheel requiredon engines using 110-120 volt starter kits listed above) |
| 2/12 | 611042 | Flywheel (Used on Type letters H and above) (Std. Point |
| J 4 2 | 011042 | ignition) (Ring gear flywheel required on engines using |
| | | 110-120 volt starter kits listed above) |
| | | , |
| 342 | 611085 | Flywheel (Minimum ring gear flywheel required on engines |
| | | using 110-120 volt starter kits listed above) (Use with Solid |
| | | State ignition) |

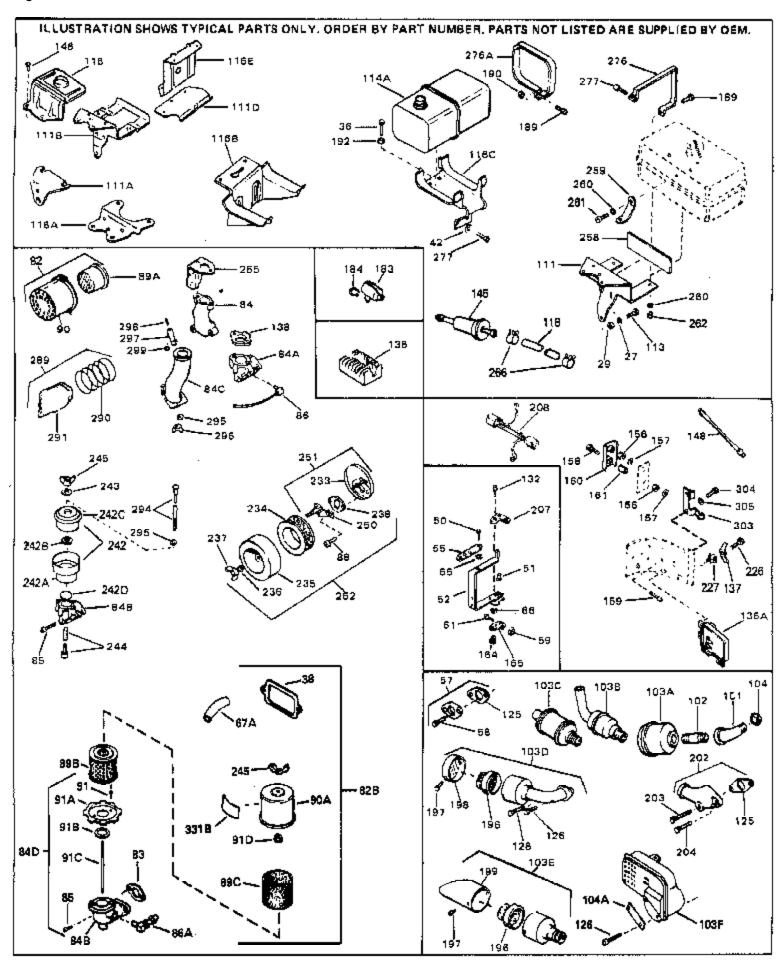

| Ref # | Part Number | Qty | Description |
|-------|-----------------|-----|--|
| | 27513 | | Lockwasher, 1/4" (Use as required) |
| | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as requi red) |
| | 650695A | | Screw, 5/16-18 x 2-1/4" (Use as requi red) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 27896A | | * Gasket, Breather cover |
| | 26073 | | Washer (Use as required) |
| | 650691 | | Washer, Flat (Use as required) |
| | 650548 | | Screw, 8-32 x 5/16" |
| | 30319 | | Rivet, Split (Used in early production) |
| 32 | 32326A | | Lever, Governor (New lever does not need 1 of 51,66,132,164,165,207) |
| | 00005 | | · · · · · · · · · · · · · · · · · · · |
| | 30205 | | Bracket, Adjusting |
| | 730130 | | Exh. Adap. Kit (Incl. 58 & 125) (Use as req.) |
| | 30196 | | Screw, 5/16-18 x 3/4" (Use as require d) |
| | 29216 | | Nut, Lock, 10-32 |
| | 29826 | | Screw, 10-32 x 3/4" |
| | 29918 730561 | | Lockwasher, #8 E.T. |
| 02D | 730301 | | Air cleaner kit (Incl. 38, 67A, 83, 84B, 85,89B, 89C, 90A, 91, 91A, 91B, 91C, 91D, 245 & 331B) (Use only on engines with |
| | | | an externally vented fully adjustable carburetor) |
| | | | , , |
| 82 | 730127 | | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89A, 90, 238 & |
| | | | 331B) (Use as required) |
| 84D | 34819 | | Air Cleaner Elbow (Incl. 84B, 86A, 91, 91A, 91B & 91C) (Use |
| | | | in 730561 assembly only) NOTE: 130010 thru 10C & 11 |
| | | | used in early production only. |
| 103E | 391026 | | Opt. Spark Arrest Muffler (Incl.196,1 97,199) |
| 113 | 650561 | | Screw, 1/4-20 x 5/8" |
| 118 | 29774 | | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.) |
| 118 | 30705 | | Fuel Line (Braided 16") (41 cm) (Use as req.) |
| | 30962 | | Fuel Line (Braided 32") (81 cm) (Use as req.) |
| | 27930A | | Gasket, Exhaust |
| | 30196 | | Screw, 5/16-18 x 3/4" |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 650548 | | Screw, 8-32 x 5/16" (Early production) |
| | 34067 | | Wire Assy., Alternator adapter (4-1/4 ") |
| | 34069 | | Wire Assy., Alternator adapter (6-3/4 ") |
| | 31288 | | Exh. Adaptor Kit (Incl.125,203,204) (As req.) |
| | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as requi red) |
| | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet |
| 266 | 26460 | | Clamp, Fuel line |