



|     | 5 (1)              | <u> </u> |  |
|-----|--------------------|----------|--|
|     |                    | Qty      | Description  |
|     | 32586C             |          | Cylinder (Incl. 2, 3, 4 & 76) (2-3/4" Bore)              |
|     | 27652              |          | Pin, Dowel   |
|     | 27642              |          | Plug, Oil drain  |
| 4   | 32630              |          | Seal, Oil  |
| 5   | 32783              |          | Intake Valve (Std.) (Incl. 9)                            |
| 5   | 32784              |          | Intake Valve (1/32" OS) (Incl. 9)                        |
|     | 27878A             |          | Exhaust Valve (Std.) (Incl. 9)                           |
|     | 27880A             |          | Exhaust Valve (1/32" OS) (Incl. 9)                       |
|     | 27882              |          | Cap, Upper valve spring                                  |
|     | 20810              |          | Pin, Valve spring retainer (Use as re quired)            |
|     | 27881              |          |  |
|     |                    |          | Spring, Valve  |
|     | 27881              |          | Spring, Valve  |
|     | 32581              |          | Cap, Lower valve spring                                  |
|     | 32581              |          | Cap, Lower valve spring                                  |
|     | 34242              |          | Dipper, Oil  |
| 10A | 32590              |          | Plate, Lock & Oil dipper (This plate may be replaced by  |
|     |                    |          | 34242 oil dipper but 650662C screw must be used.)        |
| 11  | 32680A             |          | Crankshaft (Incl. 12 & 13)                               |
|     | 29783              |          | Crankshaft Gear Pin (Early production )                  |
|     | 27884              |          |  |
| 13  | 2/004              |          | Gear, Crankshaft (Used in early production) This gear is |
|     |                    |          | servicable onlywhen it is pinned to the crankshaft.      |
| 14  | 34517              |          | Piston, Pin & Ring Set (Std.) (2-3/4" Bore)              |
| 14  | 34518              |          | Piston, Pin & Ring Set (.010" OS)                        |
| 14  | 34519              |          | Piston, Pin & Ring Set (.020" OS)                        |
|     | 32592B             |          | Piston & Pin Ass'y. (Std.)(2-3/4")(In cl.16)             |
|     | 32593B             |          | Piston & Pin Ass'y. (.010" OS) (Incl. 16)                |
|     | 32594B             |          | Piston & Pin Ass'y. (.020" OS) (Incl. 16)                |
|     | 32595              |          | Ring Set (Std.) (2-3/4" Bore)                            |
|     |                    |          |  |
|     | 32596              |          | Ring Set (.010" OS)                                      |
|     | 32597              |          | Ring Set (.020" OS)                                      |
|     | 27888              |          | Ring, Piston pin retaining                               |
|     | 32591C             |          | Rod Assy., Connecting (Incl. 10 & 18)                    |
|     | 650662C            |          | Screw, Connecting rod (2 each)                           |
|     | 32678              |          | Nipple, Oil drain  |
| 20  | 30969              |          | Cap, Oil drain   |
| 21  | 32115              |          | Camshaft (MCR)   |
| 22  | 34034              |          | Lifter, Valve  |
|     | 31303B             |          | Cover, Cylinder (Incl. 24, 106 & 279)                    |
|     | 28427              |          | Seal, Oil  |
|     | 31546              |          | Bushing, Crankshaft (Use as required)                    |
|     | 33893A             |          | Tube, Oil filler   |
|     | 34011A             |          | Dipstick, Oil (Incl. 30)                                 |
|     | 30684              |          | * Gasket, Cylinder cover                                 |
|     | 650488             |          | Screw, 1/4-20 x 1-1/4"                                   |
|     |                    |          |  |
|     | 33590              |          | "O" Ring   |
|     | 650489             |          | Screw, 1/4-20 x 5/8"  * Coolean Culinder book            |
|     | 32631A             |          | * Gasket, Cylinder head                                  |
|     | 30938A             |          | Head, Cylinder   |
|     | 27793              |          | Clip, Conduit (Use as required)                          |
|     | 28942              |          | Screw, 10-32 x 3/8" (Use as required)                    |
| 36  | 650697A            |          | Screw, 5/16-18 x 2-1/2" (Use as requi red)               |
| 36  | 650695A            |          | Screw, 5/16-18 x 2-1/4" (Use as requi red)               |
|     | 650694A            |          | Screw, 5/16-18 x 2" (Use as required)                    |
|     | 33636              |          | Resistor Spark Plug (RJ-8C)                              |
|     | 34251              |          | Resistor Spark Plug                                      |
|     | 27896A             |          | * Gasket, Breather cover                                 |
|     | 28423              |          | Body, Breather   |
| 39  | ZU <del>1</del> ZJ |          | Dody, Dicalici   |

|     |                  | ty Description  |
|-----|------------------|---|
|     | 28424            | Element, Breather   |
|     | 28425            | Cover, Valve spring   |
|     | 650690           | Washer, Belleville (Use as required)                            |
|     | 26073            | Washer (Use as required)  |
|     | 650691           | Washer, Flat (Use as required)                                  |
| 43  | 650128           | Screw, 10-24 x 1/2"   |
| 45  | 27915A           | * Gasket, Intake  |
| 46  | 34712            | Flange Carburetor   |
| 47  | 30196            | Screw, 5/16-18 x 3/4"   |
| 48  | 29716            | Screw, 1/4-28 x 7/16"   |
| 50  | 650548           | Screw, 8-32 x 5/16"   |
| 52  | 33454            | Lever Assy., Governor   |
|     | 34662            | Link, Throttle  |
|     | 29216            | Nut, Lock, 10-32  |
|     | 29826            | Screw, 10-32 x 3/4"   |
|     | 29642            | Ring, Retaining   |
|     | 30699B           | Governor Rod Ass'y. (This one-piece governor rodis no longer    |
| 00  | 30033В           | used. It is replaced by 30699C ass'y., Ref. no. 63A)            |
|     |                  | used. It is replaced by 500990 assy., itel. no. 00A)            |
| 63A | 30699C           | Rod Assy., Governor (Incl. 64 & 65)                             |
| 64  | 30700            | Yoke, Governor  |
| 65  | 650494           | Screw, 6-40 x 5/16"   |
| 66  | 29918            | Lockwasher, #8 E.T.   |
| 67  | 35350            | Tube, Breather  |
|     | 29747B           | Screw, 5/16-24 x 21/32"   |
|     | 35260            | Blower Housing (For electric starter)                           |
|     | 650815           | Washer, Belleville  |
|     | 8116             | Nut, Hex  |
|     | 29536            | Blower Housing Baffle (without electric starter knock-out)      |
| 73  | 29000            | (Use as required)   |
|     |                  | (Ose as required)   |
| 73  | 35256A           | Blower Housing Baffle (with electric starter knock-out) (Use    |
|     |                  | as required) (Point Ignition)                                   |
| 7/  | 650561           | Screw, 1/4-20 x 5/8"  |
|     | 31688A           | * Gasket, Carburetor  |
|     | 650517           | Screw, 1/4-20 x 27/32"  |
|     | 730164           | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89, 90A & 331B)       |
| 02A | 730104           | (Use as required)   |
|     |                  | (Ose as required)   |
| 97  | 34240            | Ground Wire   |
| 98  | 31342            | Spring, Compression   |
|     | 650549           | Screw, 5-40 x 7/16"   |
|     | 29538            | Base, Engine mounting   |
|     | 32401            | Muffler   |
|     | 31845            | Shaft, Mechanical governor                                      |
|     | 30591            | Gear Assy., Governor (Incl. 109)                                |
|     | 30588A           | Spool, Governor   |
|     | 30590A           | Washer, Flat  |
|     | 29193            | Ring, Retaining   |
|     | 34158            | Bracket, Fuel tank  |
|     |                  | Screw, 1/4-20 x 5/8"  |
|     | 650561<br>34186A | ·   |
| 114 | 34100A           | Fuel Tank (Incl. 115 & 266) NOTE: These tanks were built        |
|     |                  | with different size fuel inlet openings. Tanks with the 1-3/16" |
|     |                  | I.D. opening use fuel cap 33032 or 34210. Tanks with the        |
|     |                  | 1-1/2" I.D. opening use fuel cap 35355 or 35650.                |
| 115 | 410144B          | Fuel Cap (White Plastic)(Std)(As requ ired)                     |
|     | 33032            | Fuel Cap (Charcoal Plastic) (Spurt resistant, Low profile)      |
| .10 | <del>-</del>     | (Use as required)   |
|     |                  | ()  |

| Dof # | Part Number | h. Description   |
|-------|-------------|--|
|       |             | ty Description  Fuel Cap (Pad Plastic) (Spurt registent, High prefile) (Use as |
| 110   | 34210       | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as                 |
|       |             | required)  |
| 115   | 35355       | Fuel Cap (Use as required)   |
|       | 34159       | Plate, Fuel tank mounting  |
|       | 32961       | Valve, Shut-off  |
|       | 29774       | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.)                                  |
|       | 30705       | Fuel Line (Braided 16") (41 cm) (Use as req.)                                  |
|       |             |  |
|       | 30962       | Fuel Line (Braided 32") (81 cm) (Use as req.)                                  |
|       | 650128      | Screw, 10-24 x 1/2" (Use as required)  |
|       | 30622A      | Extension, Blower housing  |
|       | 650542      | Screw, 5/16-18 x 3/4"  |
| 125   | 27930A      | Gasket, Exhaust  |
| 126   | 30196       | Screw, 5/16-18 x 3/4"  |
| 127   | 26073       | Washer (Use as required)   |
| 128   | 650694A     | Screw, 5/16-18 x 2" (Use as required)  |
|       | 32589       | Key, Flywheel  |
|       | 31843A      | Bracket, Governor gear   |
|       | 650836      | Screw, 10-24 x 1/2"  |
|       |             | ·  |
|       | 650493      | Screw, 1/4-20 x 1-3/4"   |
|       | 30747       | Clip, Shorting   |
|       | 650665      | Screw, 1/4-15 x 7/8"   |
|       | 610118      | Cover, Spark plug (Use as required)  |
| 205   | 650561      | Screw, 1/4-20 x 5/8" (Use as required )  |
| 209   | 30939A      | Cover, Cylinder head   |
| 219   | 34814       | Primer Assy.   |
| 223   | 32180C      | Line, Primer   |
|       | 34126       | Bracket, Grommet mounting  |
|       | 650760      | Screw, 8-32 x 3/8"   |
|       | 28545       | Grommet  |
|       |             |  |
|       | 32125       | Cup, Starter   |
|       | 590417      | Screen, Starter cup  |
|       | 26460       | Clamp, Fuel line   |
|       | 31461       | Bushing, Crankshaft (Use as required)  |
| 271   | 33876       | Gasket, Stator   |
| 274   | 610973      | Terminal Ass'y. (As req. on late prod uction)                                  |
| 287   | 27275       | Clip, Hi-tension wire (Use as require d)                                       |
|       | 34246       | Clip, Ground wire (Use as required)  |
|       | 34346       | Decal, Instruction   |
|       | 30547A      | Contact Assy., Breaker   |
|       | 30548B      | Condenser  |
|       | 631021      |  |
|       |             | Inlet Needle, Seat & Clip Assy.  |
| 336   | 631920      | Carburetor (Incl. 75) (Refer to Division 5, Section A, page 138                |
|       |             | for breakdown)   |
| 337   | 610694A     | Magneto (w/ring gear for 110 volt sta rter) NOTE: The                          |
| 00.   | 0.000 # (   | complete magneto is not available as an assembly. The                          |
|       |             | magneto number is shown for reference purposes only.                           |
|       |             |  |
|       |             | Order component parts individually, as show in parts list.                     |
|       |             | (Refer to Division 5, Section B, page 24 for breakdown)                        |
|       | 590473      | Rewind Starter (Refer to Division 5, Section C, page 29 for                    |
| 330   | 000 11 0    | breakdown)   |
|       |             | DIGANGOWI I)   |
| 343   | 33239A      | Gasket Set (Incl. items marked*)   |
| 2.0   |             | • • •  |

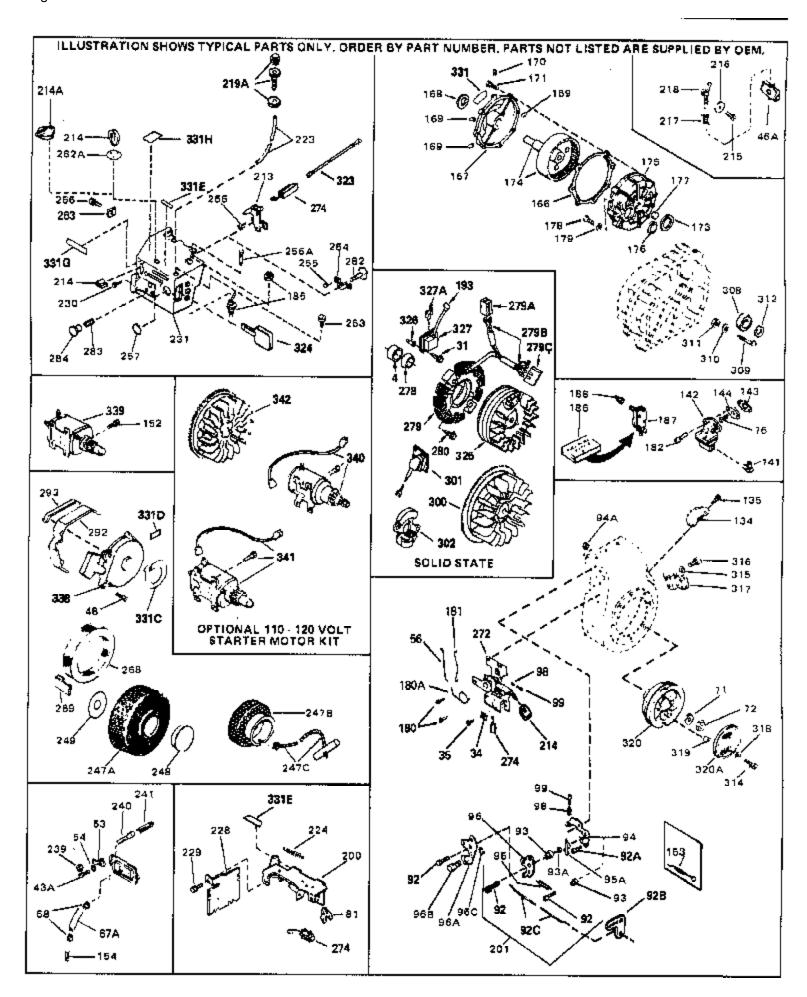

| 31<br>34<br>35<br>43A<br>48<br>56<br>71                      | Part Number<br>650489<br>27793<br>28942<br>650128<br>29716<br>34662<br>650815<br>8116                | Qty | Description  Screw, 1/4-20 x 5/8"  Clip, Conduit (Use as required)  Screw, 10-32 x 3/8" (Use as required)  Screw, 10-24 x 1/2"  Screw, 1/4-28 x 7/16"  Link, Throttle  Washer, Belleville  Nut, Hex  |
|--|--|-----|--|
| 98<br>99<br>134<br>135<br>180A<br>180<br>181<br>193          | 31342<br>650549<br>33013<br>650760<br>34663<br>650821<br>34661<br>610118                             |     | Spring, Compression Screw, 5-40 x 7/16" Cover, Bubble Screw, 8-32 x 3/8" Spring, Speed control Screw, 10-32 x 1/2" Link, Governor Cover, Spark plug (Use as required)  |
| 214<br>223<br>230<br>231<br>254<br>255<br>256A<br>256<br>263 | 35438<br>32410<br>32180C<br>650257<br>34672<br>32398<br>28820<br>650765<br>650760<br>650764<br>34677 |     | Knob, Control Knob, Speed control Line, Primer Screw, 8-32 x 5/16" Cover, Carburetor Bracket, Choke Screw, 10-32 x 1/2" Screw, 10-32 x 1/2" Screw, 8-32 x 3/8" Nut, "U" Type (Use as required) Control Bracket (Incl. 98, 99, 180A & 274)  |
| 274<br>292<br>293<br>331H<br>331G<br>338                     | 610973<br>34127<br>32576<br>34680<br>34416<br>590473   |     | Terminal Ass'y. (As req. on late prod uction) Guard Starter Seal, Snow guard Decal, Instruction Decal, Choke Rewind Starter (Refer to Division 5, Section C, page 29 for breakdown)  |
| 340  | 33328D   |     | Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel (see#342). Refer to service number stamped on end cap of motor, or on decal, for identifica |
|  | 30811A   |     | Flywheel (Ring gear flywheel requiredon engines using 110-120 volt starter kits listed above)  |
| 342  | 611042   |     | Flywheel (Used on Type letters H and above) (Std. Point ignition) (Ring gear flywheel required on engines using 110-120 volt starter kits listed above)  |
| 342  | 611085   |     | Flywheel (Minimum ring gear flywheel required on engines using 110-120 volt starter kits listed above) (Use withSolid State ignition)  |

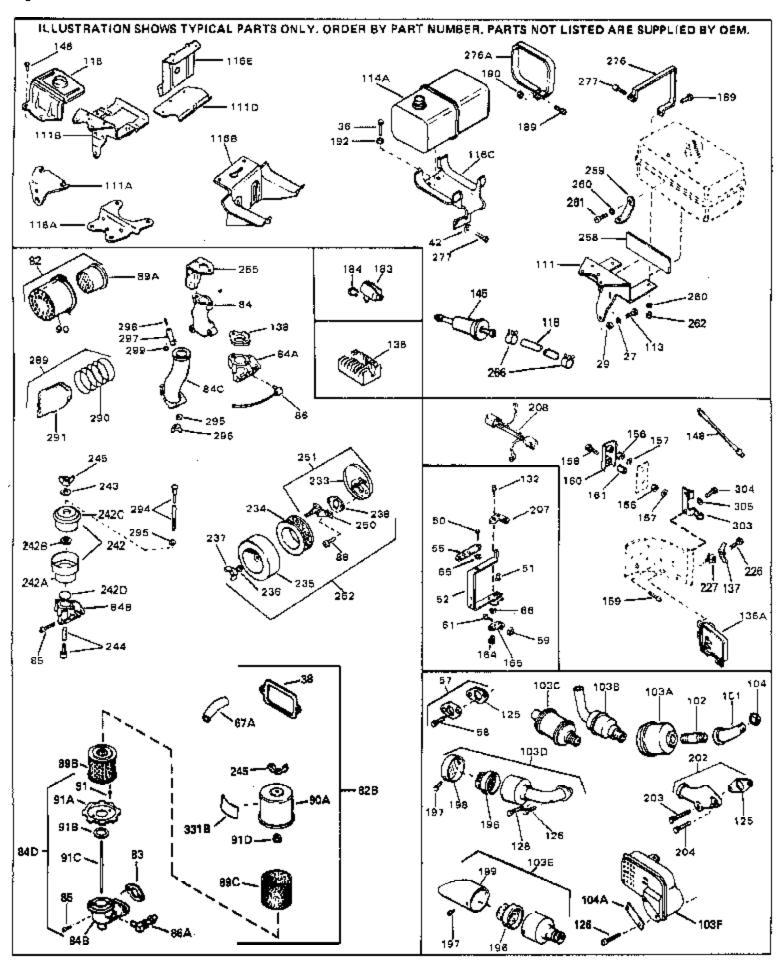

| 5                | D (N)       | <u> </u> | <b>D</b> :::   |
|------------------|-------------|----------|--|
|                  | Part Number | Qty      | Description  |
|                  | 27513       |          | Lockwasher, 1/4" (Use as required)                             |
|                  | 650697A     |          | Screw, 5/16-18 x 2-1/2" (Use as requi red)                     |
|                  | 650695A     |          | Screw, 5/16-18 x 2-1/4" (Use as requi red)                     |
|                  | 650694A     |          | Screw, 5/16-18 x 2" (Use as required)                          |
| 38               | 27896A      |          | * Gasket, Breather cover                                       |
| 42               | 26073       |          | Washer (Use as required)                                       |
| 42               | 650691      |          | Washer, Flat (Use as required)                                 |
| 50               | 650548      |          | Screw, 8-32 x 5/16"  |
| 51               | 30319       |          | Rivet, Split (Used in early productio n)                       |
|                  | 33454       |          | Lever Assy., Governor  |
|                  | 730130      |          | Exh.Adap.Kit (Incl. 58 & 125) (Use as req.)                    |
|                  | 30196       |          | Screw, 5/16-18 x 3/4" (Use as require d)                       |
|                  | 29216       |          | Nut, Lock, 10-32   |
|                  | 29826       |          | Screw, 10-32 x 3/4"  |
|                  | 29918       |          | Lockwasher, #8 E.T.  |
|                  | 730561      |          | Air cleaner kit (Incl. 38, 67A, 83, 84B, 85,89B, 89C, 90A, 91, |
| 020              | 700001      |          | 91A, 91B, 91C, 91D, 245 & 331B) (Use only on engines with      |
|                  |             |          | an externally vented fully adjustable carburetor)              |
|                  |             |          | an externally vertied fully adjustable carburetor)             |
| 82               | 730127      |          | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89A, 90, 238 &       |
|                  |             |          | 331B) (Use as required)  |
| 0.4D             | 0.404.0     |          |  |
| 8 <del>4</del> D | 34819       |          | Air Cleaner Elbow (Incl. 84B, 86A, 91, 91A, 91B & 91C) (Use    |
|                  |             |          | in 730561 assembly only) NOTE: 130010 thru 10C & 11            |
|                  |             |          | used in early production only.                                 |
| 103E             | 391026      |          | Opt. Spark Arrest Muffler (Incl.196,1 97,199)                  |
|                  | 650561      |          | Screw, 1/4-20 x 5/8"   |
|                  | 29774       |          | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.)                  |
|                  | 30705       |          | Fuel Line (Braided 16") (41 cm) (Use as req.)                  |
|                  | 30962       |          | Fuel Line (Braided 32") (81 cm) (Use as req.)                  |
|                  | 27930A      |          | Gasket, Exhaust  |
|                  | 30196       |          | Screw, 5/16-18 x 3/4"  |
|                  | 650694A     |          | ·  |
|                  |             |          | Screw, 5/16-18 x 2" (Use as required)                          |
|                  | 650548      |          | Screw, 8-32 x 5/16" (Early production )                        |
|                  | 34067       |          | Wire Assy., Alternator adapter (4-1/4 ")                       |
|                  | 34069       |          | Wire Assy., Alternator adapter (6-3/4 ")                       |
|                  | 30322       |          | Nut & Lockwasher (Early Prod. Only)                            |
|                  | 29916       |          | Clamp, Governor lever (Early Prod. On ly)                      |
|                  | 31288       |          | Exh. Adaptor Kit (Incl.125,203,204) ( As req.)                 |
|                  | 650697A     |          | Screw, 5/16-18 x 2-1/2" (Use as requi red)                     |
|                  | 6021A       |          | Screw, 5/16-18 x 1-1/2" (Use as requi red)                     |
| 226              | 650760      |          | Screw, 8-32 x 3/8"   |
| 227              | 28545       |          | Grommet  |
| 266              | 26460       |          | Clamp, Fuel line   |
|                  |             |          | •  |