
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

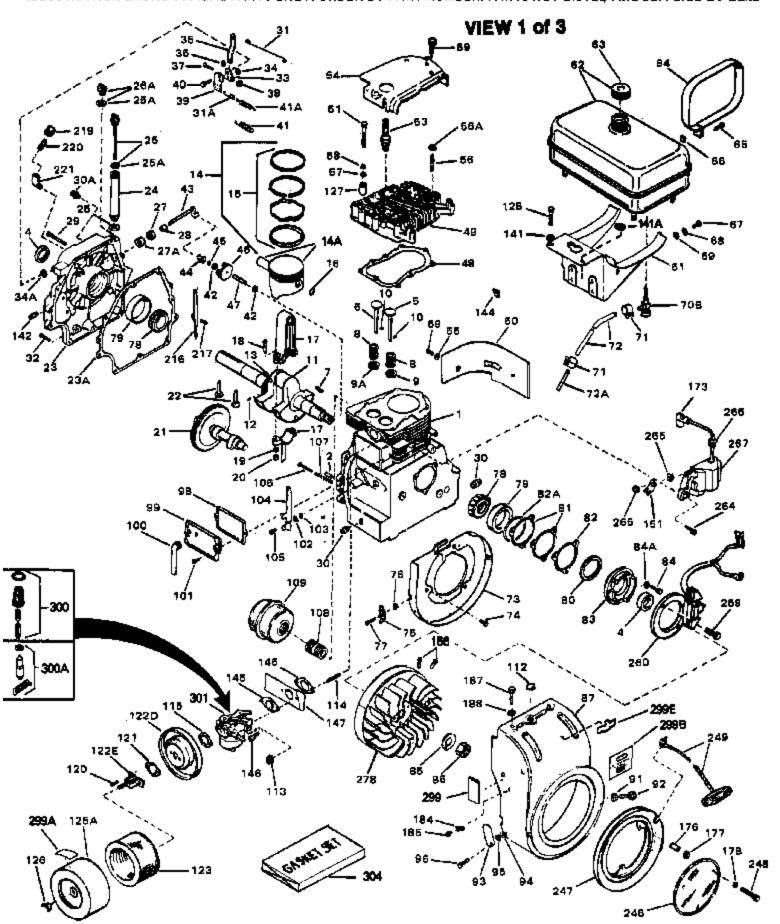


	Dry N. oder	Description
	Part Number Qty	
	33042	Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)
	27652	Pin, Dowel
4	31950	Seal, Oil
5	31940	Intake Valve (Std.)
5	31941	Intake Valve (1/32" OS) (Incl. 9)
	31942	Exhaust Valve (Std.)
	31943	Exhaust Valve (1/32" OS) (Incl. 9)
	650592	Key, Flywheel
	31944	Spring, Valve
	32475	Cap, Lower valve spring (Rotator)
	31946	Cap, Lower valve spring (1/32" OS)
	31945	Cap, Lower valve spring (Std.)
	20810_	Pin, Valve spring retainer
	32357B	Crankshaft (Incl. 12, 13, 17, 78 & 79)
12	29783	Pin, Crankshaft gear
13	31931	Gear, Crankshaft
14	34511	Piston, Pin & Ring Set (Std.) (3-1/2" Bore)
14	34512	Piston, Pin & Ring Set (.010" OS)
	34513	Piston, Pin & Ring Set (.020" OS)
	34524	Piston, Pin & Ring Set (.030" OS)
	34525	Piston, Pin & Ring Set (.040" OS)
	32238B	,
		Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")
	32239B	Piston & Pin Ass'y. (.010" OS) (Incl. 16)
	32240B	Piston & Pin Ass'y. (.020" OS) (Incl. 16)
	32621B	Piston & Pin Ass'y. (.030" OS) (Incl. 16)
	32622B	Piston & Pin Ass'y. (.040" OS) (Incl. 16)
	32241	Ring Set (Std.) (3-1/2" Bore)
15	32242	Ring Set (.010" OS)
15	32243	Ring Set (.020" OS)
15	32625	Ring Set (.030" OS)
	32626	Ring Set (.040" OS)
	32336	Re-Ringing Set, Piston
	31919	Ring, Piston pin retaining
	33093A	Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
	34383	Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)
	34384	Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)
	32077	Bolt, Connecting rod
	26073	Washer, Connecting rod
	28264	Nut Assy., Lock
	32150	Camshaft (MCR)
	31939	Lifter, Valve
	32685	Cylinder Cover (Incl.4,25,26A,28,30,3 4 & 43)
23A	31956A	* Gasket, Cylinder cover
25A	29673	* Gasket, Oil fill
26	33069	Dipstick (Incl. 25A)
28	32426	Spacer, Governor rod
	650588	Screw, 1/4-20 x 2"
	31927	Oil Drain Plug
	31968	Link, Governor
	650451	Screw, 1/4-20 x 1"
	31964	Clamp, Governor lever
	29193	Ring, Retaining
	31963	Lever, Governor adjusting
	650518	Lockwasher
	650544	Screw, 10-24 x 7/8"
	7975	Nut, 10-24
39	31965	Plate, Governor spring
40	30312	Screw, 10-32 x 1/2"


Ref #	Part Number Qty	Description
	31967	Spring, Governor
	30590A	Washer, Flat
	32425	Rod Assy., Governor
	31948	Spool, Governor
	29193	Ring, Retaining
	31947	Gear Assy., Governor
	31930	Shaft, Mechanical Governor
	32246A	* Gasket, Cylinder head
	33034	Head, Cylinder
	650694A	Screw, 5/16-18 x 2" (Use as required)
	650711	Screw, 5/16-18 x 1-5/8" (Use as required)
	650628A	Screw, 5/16-18 x 2-3/8" (Use as required)
	650695A	Screw, 5/16-18 x 2-1/4" (Use as required)
	650714	Screw, 5/16-18 x 1-5/8" (Use as required)
	650697A	Screw, 5/16-18 x 2-1/2" (Use as required)
	650692	Screw, 5/16-18 x 1-3/4" (Use as required)
	650603	Screw, 5/16-18 x 5/8" (Use as require d)
	33636	Resistor Spark Plug (RJ-8C)
	34251	Resistor Spark Plug (RJ-17LM)
	33035	Cover, Cylinder head
	28537	Washer, Plain
	650691	Washer, Flat (Use as required)
	650690	Washer, Belleville (Use as required)
	8274	Washer, Lock (Use as required)
	650128	Screw, 10-24 x 1/2"
	31976	Extension, Blower housing
	31978	Bracket, Fuel tank
	410144B	Fuel Cap (White Plastic)(Std.)(As req uired)
	34210	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
00	01210	required)
64	31979	Strap, Fuel tank
	650451	Screw, 1/4-20 x 1"
	650456	Nut, Flange whiz-lock, 1/4-20
	650517	Screw, 1/4-20 x 27/32" (Use as requir ed)
	650561	Screw, 1/4-20 x 27/32 (Use as required) Screw, 1/4-20 x 5/8" (Use as required)
	30063	Screw, 1/4-20 x 3/6 (Ose as required) Screw, 1/4-20 x 1/2" (Use as required)
	792028	Screw, 5/16-18 x 7/8" (Use as required)
	8345	Washer, Flat
	8303	Lockwasher
	29683	Strainer & Shut-off, Fuel
	26460	Clamp, Fuel line (Use as required)
	29774	Fuel Line (Braided) (8.25") (Use as r equired)
	30705	Fuel Line (Braided) (16") (Use as required)
	30962	Fuel Line (Braided) (32") (Use as req uired)
	30965	Fuel Line (Braided) (48") (Use as req uired)
	32579	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33356	Terminal
	28545	Grommet, Plastic
	650760	Screw, 8-32 x 3/8"
	31932	Bearing, Tapered roller
	31928	Cup, Bearing
19	01020	oup, bouing

80 32031 Spacer, Steel (J01" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shirin gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required 81 31971 *Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shirin gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req. 82A 32599 *Zosel, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be form .001"up to .007" in which case no shirin gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req. 83 32677 Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shirin gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat 84A 650679 84 650688 SAA 650699 Screw, 10-32 x 1" Washer, Lock 86 650694 Nur, Flywheel, 34-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock 98 31956 Screw, 15-62 x x 38" Sorew, 10-24 x 12" Washer, Lock Screw, 10-24 x 12" Washer, Control lever Lever, Control Gasket, Marchaner Screw, 15-62 x 38" Sorew, 1	Ref #	Part Number	Qty Description
between the covier and the machined surface on the cylinder which can be from Johl' to tho Johl' and so shirn gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req. 82A 32599 "O' Ring "Gasket, Shim (.005.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" by .007" in which case no shirn gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req. 83 32677 Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" by to .007" in which case no shirn gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req. 84A 650679 Lockwasher, 5/16" (Use as required to eliminat 84A 650679 Lockwasher, 5/16" (Use as required to eliminat 84A 650668 Screw, 10-32 x 1" 85 650666 Washer, Lock 86 650594 Nut, Flywheel, 34-16 87 33044A Blower Hsg, Incl.73) (For electric s tarter) 91 8274 Washer, Lock 92 650595 Screw, 5/16-24 x 38" 93 32039 Sintich, Stop 94 650690 Washer, Shakeproof 95 26073 Washer, Shakeproof 96 526073 Screw, 5/16-24 x 9/16" 97 31958 Reather 101 650128 Screw, 5/16-24 x 9/16" 102 28558 Washer, Wave 103 31996 Bushing, Control lever 104 13984A Lever, Control 105 650697 Screw, 10-24 x 2" 106 30399 Spring 107 30399 Spring 108 20727 "Gasket, Air cleaner 109 20737 Bracket, Air cleaner 100 30399 Spring 101 30378 Bracket, Air cleaner			Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
## Gaskaft, Shim (005/007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001*up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req ## Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001*up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required .010" thick. Steel spacersmust be used as required to eliminat ## 650669 ## 650668 ## 650666 ## 650666 ## 650694 ## 87 330444A ## Blower Hsg. (Incl.73) (For electric s tarter) ## 8274 ## 98 8274 ## 98 8274 ## 98 8274 ## 98 83 32039 ## 650890 ## 650890 ## 650890 ## 650664 ## 533090 ## 650664 ## 533090 ## 650664 ## 533090 ## 650664 ## 533090 ## 650664 ## 533090 ## 650664 ## 533090 ## 650697 ## 650697 ## 650697 ## 650697 ## 650697 ## 650697 ## 650697 ## 6506997 ## 6506997 ## 6506997 ## 6506997 ## 6506997 ## 6506997 ## 6506997 ## 6506997 ## 6506999	81	31971	between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat 84A 650669			* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
84 650668 85 650666 86 650594 87 33044A 88 650595 87 33044A 89 650595 80 650595 80 650695 80 650690 80 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 800 80 8	83	32677	and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to
122E 32376 Bracket, Air cleaner 125A 32009 Cover, Air cleaner 126 650513 Nut, Wing	84 85 86 87 91 92 93 94 95 96 98 99 100 101 102 103 104 105 106 107 112 113 114 115 120 121 122D 122E 125A	650668 650594 33044A 8274 650595 32039 650890 26073 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 33038 29752 650587 27272 650399 30767 32378 32376 32009	Screw, 10-32 x 1" Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Switch, Stop Washer, Shakeproof Washer, Flat Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Bracket, Air cleaner

Ref #	Part Number	Qty	Description
128	650713		Screw, 5/16-18 x 5/8" (Use as require d)
128	650429		Screw, 5/16-18 x 3/4" (Use as require d)
128	792028		Screw, 5/16-18 x 7/8" (Use as require d)
141A	8274		Lockwasher, Split (Use as required)
141	26073		Washer, Flat (Use as required)
145	31960		* Gasket, Carburetor
147	31959		Baffle, Air
156	730201		Trigger Pin Kit (Use as required)
173	610118		Cover, Spark plug (Use as required)
176	31992		Spacer, Screen
177	8345		Washer, 1/4 plain (Use as required)
178	27070		Washer, Lock 1/4 E.T. (Use as require d)
	650675		Washer, Flat 1/4 (Use as required)
	650713		Screw, 5/16-18 x 5/8"
	26073		Washer, Flat
	33776		Screen, Starter pulley
	31980		Pulley, Starter
	650680		Screw, 1/4-20 x 1-1/2"
	32046		Rope Assy., Starter (Use as required)
	610750		Grommet, Lead wire
	610773		Solid State Flywheel
	34768		Decal, Name
	32676		Decal, Solid State
	31752		Decal, Air cleaner
	34346		Decal, Instruction
	32255A		Valve, Seat, Spring & Gasket Assy.
301	631533		Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 for breakdown)
304	33237A		* Gasket Set (Incl. items marked *)

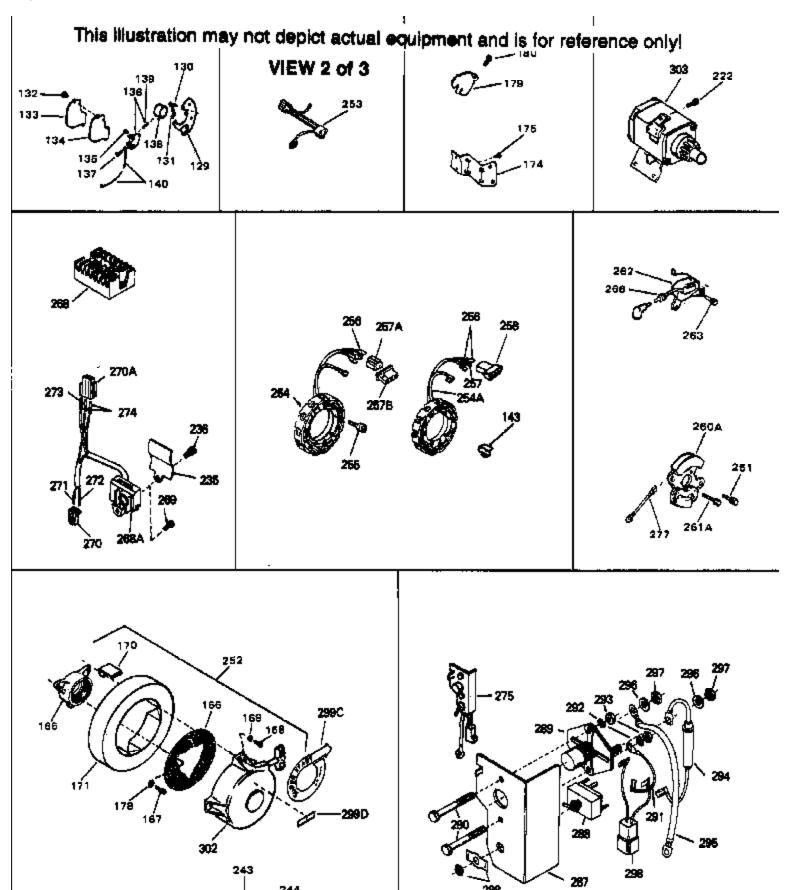

Ref #	Part Number	Qty	Description
	27070		Washer, Lock 1/4 E.T. (Use as require d)
	650675		Washer, Flat 1/4 (Use as required)
180	650701		Screw, 8-18 x 7/16" (Use as required)
222	792028		Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)
222	650781		Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)
235	34276		Plate, Cover (Use as required to cover regulator mounting hole in blower housing)
236	650736		Screw, 10-16 x 3/8" (Use as required)
	730134		Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)
253	33018		Harness Assy., Adapter (Use as requir ed)
257B	610824		Flat Connector (Female terminals) (As req.)
260A	610759		Solid State Magneto
261	650489		Screw, 1/4-20 x 5/8"
261A	650669		Screw, 5/16-18 x 1-1/4"
262	610760		Solid State Transformer Ass'y.(Incl.1 73,266)
	650561		Screw, 1/4-20 x 5/8"
	610750		Grommet, Lead wire
	730198		Starter Switch Kit(Incl. 287-298) (As req.)
	30831		Ground Wire (Incl. 75)
303	33835		Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown.

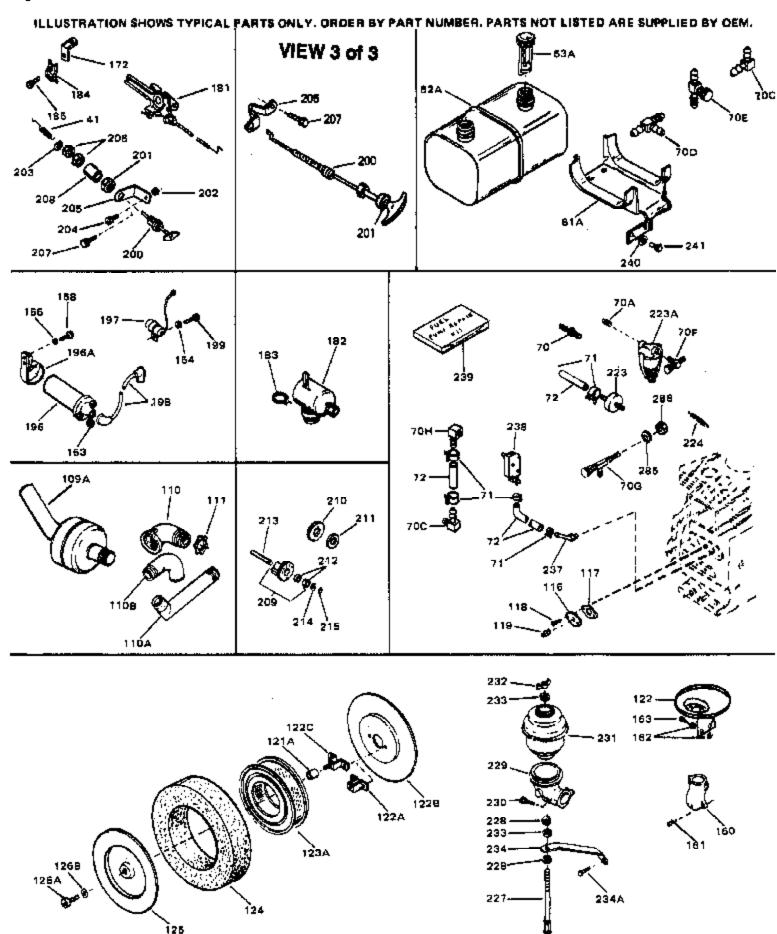

Ref #	Part Number Qt	y Description
41	31967	Spring, Governor
62A	31977	Fuel Tank (Incl. 63)
70	29634	Fitting, Fuel line
71	26460	Clamp, Fuel line (Use as required)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
72	30705	Fuel Line (Braided) (16") (Use as req uired)
72	30962	Fuel Line (Braided) (32") (Use as req uired)
72	30965	Fuel Line (Braided) (48") (Use as req uired)
119	28534	Pipe Plug, 1/8-27 (Use as required)
119	9556	Plug, Pipe, 1/8-27 (Use as required)
123A	32008	Element, Air cleaner