
## ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

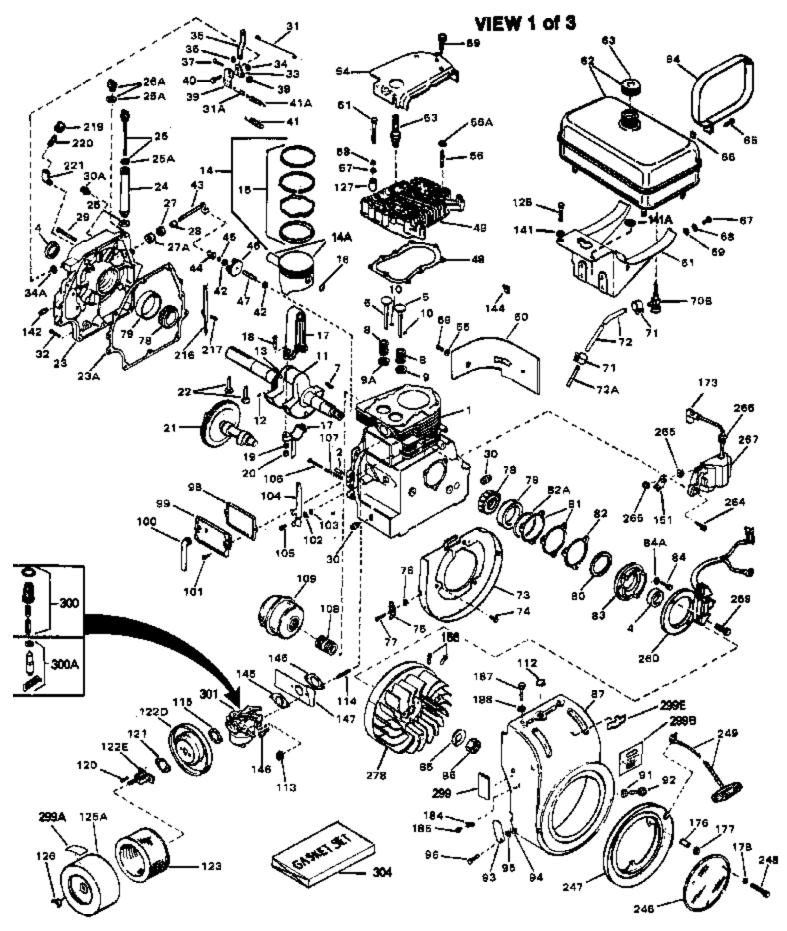


Ref # Part Number	Qty Description
1 33042	Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)
2 27652	Pin, Dowel
4 31950	Seal, Oil
5 31940	Intake Valve (Std.)
5 31941	Intake Valve (1/32" OS) (Incl. 9)
6 31942	Exhaust Valve (Std.)
6 31943	Exhaust Valve (1/32 <sup>"</sup> OS) (Incl. 9)
7 650592	Key, Flywheel
8 31944	Spring, Valve
9A 32475	Cap, Lower valve spring (Rotator)
9 31946	Cap, Lower valve spring (1/32" OS)
9 31945	Cap, Lower valve spring (Std.)
10 20810	Pin, Valve spring retainer
11 33392A	Crankshaft (Incl. 12, 13, 78 & 79)
12 29783	Pin, Crankshaft gear
13 31931	Gear, Crankshaft
14A 32238B	Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")
14A 32239B	Piston & Pin Ass'y. (.010" OS) (Incl. 16)
14A 32240B	Piston & Pin Ass'y. (.020" OS) (Incl. 16)
14A 32621B	Piston & Pin Ass'y. (.030" OS) (Incl. 16)
14A 32622B	Piston & Pin Ass'y. (.040" OS) (Incl. 16)
14 34511	Piston, Pin & Ring Set (Std.) (3-1/2" Bore)
14 34512	Piston, Pin & Ring Set (.010" OS)
14 34513	Piston, Pin & Ring Set (.020" OS)
14 34524	Piston, Pin & Ring Set (.030" OS)
14 34525	Piston, Pin & Ring Set (.040" OS)
15 32241	Ring Set (Std.) (3-1/2" Bore)
15 32241	Ring Set (.010" OS)
15 32243	Ring Set (.020" OS)
15 32625	Ring Set (.030" OS)
15 32626	Ring Set (.000 '03)
15 32336	Re-Ringing Set, Piston
16 31919	Ring, Piston pin retaining
17 33093A	Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
17 34383	Connecting Rod Assy.(.010" US)(Incl.1 8, 19, 20)
17 34384	Connecting Rod Assy.(.010 US)(Ind. 1 8, 19,20) Connecting Rod Assy.(.020" US)(Ind. 1 8, 19,20)
18 32077	Bolt, Connecting rod
19 26073	Washer, Connecting rod
20 28264	Nut Assy., Lock
21 32150	Camshaft (MCR)
22 31939	Lifter, Valve
23A 31956A	* Gasket, Cylinder cover
23 32685	Cylinder Cover (Incl.4,25,26A,28,30,3 4 & 43)
25A 29673	* Gasket, Oil fill
26A 27625	Oil Fill Plug (Incl. 25A)
28 32426	Spacer, Governor rod
29 650588	Screw, 1/4-20 x 2"
30 31927	Oil Drain Plug
31 31968	Link, Governor
32 650451	Screw, 1/4-20 x 1"
33 31964	Clamp, Governor lever
34 29193	Ring, Retaining
35 31963	Lever, Governor adjusting
36 650518	Lockwasher
37 650544	Screw, $10-24 \times 7/8$ "
37 000044 38 7975	Nut, 10-24
39 31965	Plate, Governor spring
40 30312	Screw, $10-32 \times 1/2$ "

Spring, Governor Washer, Flat Rod Assy., Governor Spool, Governor Ring, Retaining
Rod Assy., Governor Spool, Governor
Spool, Governor
Spool, Governor
•
3, 3
Gear Assy., Governor
Shaft, Mechanical Governor
* Gasket, Cylinder head
Head, Cylinder
Screw, 5/16-18 x 2" (Use as required)
Screw, 5/16-18 x 1-5/8" (Use as required)
Screw, 5/16-18 x 2-3/8" (Use as required)
Screw, 5/16-18 x 2-1/4" (Use as requi red)
Screw, 5/16-18 x 1-5/8" (Use as requi red)
Screw, 5/16-18 x 2-1/2" (Use as requi red)
Screw, 5/16-18 x 1-3/4" (Use as requi red)
Screw, 5/16-18 x 5/8" (Use as require d)
Resistor Spark Plug (RJ-8C)
Resistor Spark Plug (RJ-17LM)
Cover, Cylinder head
Washer, Plain
Washer, Flat (Use as required)
Washer, Belleville (Use as required)
Washer, Lock (Use as required)
Screw, 10-24 x 1/2"
Extension, Blower housing
Bracket, Fuel tank
Fuel Cap (White Plastic)(Std.)(As req uired)
Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
required)
Strap, Fuel tank
•
Screw, 1/4-20 x 1"
Nut, Flange whiz-lock, 1/4-20
Screw, 1/4-20 x 27/32" (Use as required)
Screw, 1/4-20 x 5/8" (Use as required )
Screw, 1/4-20 x 1/2" (Use as required )
Screw, 5/16-18 x 7/8" (Use as require d)
Strainer & Shut-off, Fuel
Clamp, Fuel line (Use as required)
Fuel Line (Braided) (48") (Use as req uired)
Fuel Line (Braided) (8.25") (Use as r equired)
Fuel Line (Braided) (16") (Use as req uired)
Fuel Line (Braided) (32") (Use as req uired)
Baffle, Blower housing
Screw, 1/4-20 x 5/8"
Terminal
Grommet, Plastic
Screw, 8-32 x 3/8"
Bearing, Tapered roller
Cup, Bearing
Spacer, Steel (.010" thick) NOTE: Determine the gap
between the cover and the machined surface on the cylinder
which can be from .001"up to .007" in which case no shim
gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used

Ref # Part Number 81 31971	Qty Description * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder
	which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
82 31972	* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
82A 32599 83 32677	"O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat
84 650668	Screw, 10-32 x 1"
84A 650679	Lockwasher, 5/16" (Use as required)
85 650666 86 650594	Washer, Lock
87 33044A	Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter)
91 8274	Washer, Lock
92 650595	Screw, 5/16-24 x 3/8"
93 32039	Switch, Stop
94 650890	Washer, Shakeproof
95 26073 96 650624	Washer, Flat Screw, 5/16-24 x 9/16"
98 31958	* Gasket, Breather
99 31957	Breather Assy.
100 35350	Tube, Breather
101 650128	Screw, 10-24 x 1/2"
102 28558	Washer, Wave
103 31966 104 31984A	Bushing, Control lever Lever, Control
105 650597	Screw, 10-24 x 5/8"
106 650591	Screw, 10-24 x 2"
107 33099	Spring
108 32042	Nipple, Exhaust pipe
109 32043B 112 33038	Muffler Plug, Button (Use as required)
115 27272	* Gasket, Air cleaner
120 650399	Screw, 10-32 x 5/8"
121 30767	Spacer, Air cleaner
125A 32810	Cover, Air cleaner
126 650513 128 650712	Nut, Wing Scrow 5/16 18 x 5/8" (Lice as require d)
128 650713 128 650429	Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 3/4" (Use as require d)
128 792028	Screw, $5/16-18 \times 7/8$ " (Use as require d)
141A 8274	Lockwasher, Split (Use as required)
141 26073	Washer, Flat (Use as required)
145 33263	* Gasket, Carburetor
4.40, 050,454	
146 650451 147 34061	Screw, 1/4-20 x 1" Baffle, Air

Ref #	Part Number Qty	Description
156	730201	Trigger Pin Kit (Use as required)
173	610118	Cover, Spark plug (Use as required)
176	31992	Spacer, Screen
177	8345	Washer, 1/4 plain (Use as required)
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
187	650713	Screw, 5/16-18 x 5/8"
188	26073	Washer, Flat
246	33776	Screen, Starter pulley
247	31980	Pulley, Starter
248	650680	Screw, 1/4-20 x 1-1/2"
249	32046	Rope Assy., Starter (Use as required)
266	610750	Grommet, Lead wire
278	610773	Solid State Flywheel
299B	550223	Decal, Name
299B	34768	Decal, Name
299B	32676	Decal, Solid State
299A	31752	Decal, Air cleaner
299	34346	Decal, Instruction
300A	631021	Inlet Needle, Seat & Clip Assy.
301	631877	Carburetor (Incl. 145) (Refer to Division 5, Section A, page
		134 for breakdown)
304	33237A	* Gasket Set (Incl. items marked *)

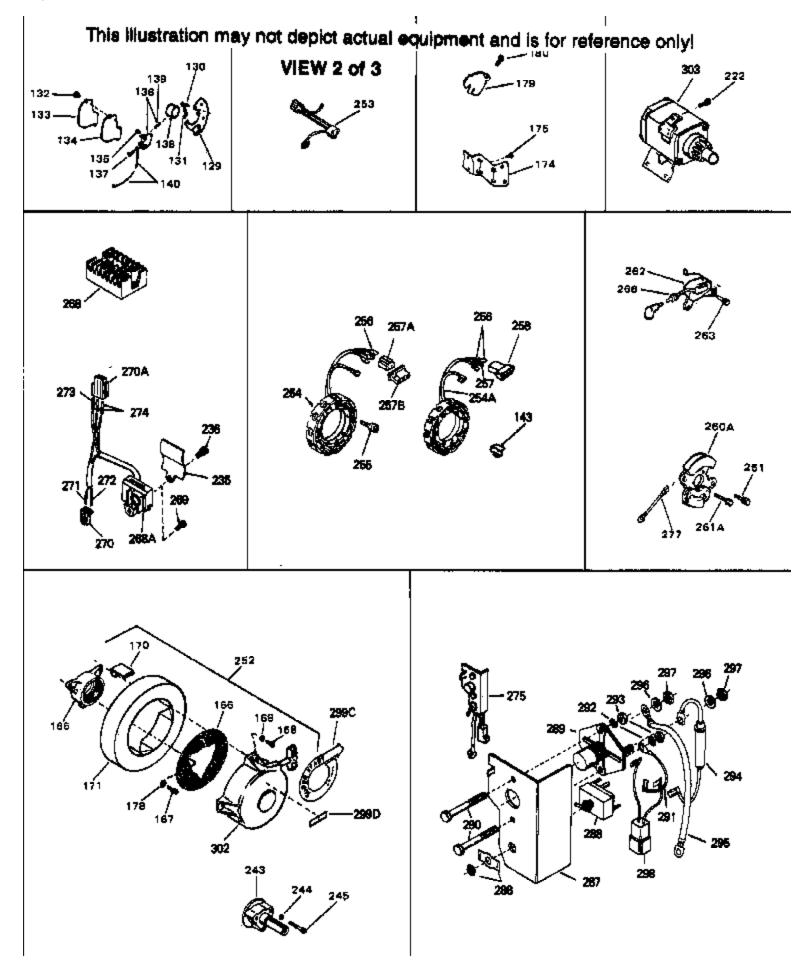

Ref #	Part Number	Qty De	escription
178	27070	Wa	/asher, Lock 1/4 E.T. (Use as require d)
178	650675	Wa	/asher, Flat 1/4 (Use as required)
180	650701	Sc	crew, 8-18 x 7/16" (Use as required)
222	792028	Sc	crew, 5/16-18 x 7/8" (Use w/32817 st r.motor)
222	650781	Sc	crew,5/16-18 x 11/16"(Use w/33835 st r.motor)
235	34276		ate, Cover (Use as required to cover regulator mounting ble in blower housing)
236	650736	Sc	crew, 10-16 x 3/8" (Use as required)
	730134	Re	ewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use s required)
253	33018	Ha	arness Assy., Adapter (Use as requir ed)
	610824		at Connector (Female terminals) (As req.)
	610759		blid State Magneto
	650489		crew, 1/4-20 x 5/8"
	650669		crew, 5/16-18 x 1-1/4"
262	610760		blid State Transformer Ass'y.(Incl.1 73,266)
263	650561	Sc	crew, 1/4-20 x 5/8"
266	610750	Gr	rommet, Lead wire
275	730198	Sta	arter Switch Kit(Incl. 287-298) (As req.)
277	30831	Gr	round Wire (Incl. 75)
303	33835	sta Re de	ectric Starter Motor (12 Volt) NOTE: The 32817 and 33835 arter motors are used interchangeably on the se models. efer to service numberstamped on end cap of motor, or on ecal for identification. Refer to Division 5, Section D for eakdown.


1268

126A

Ć

Ĩ25

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

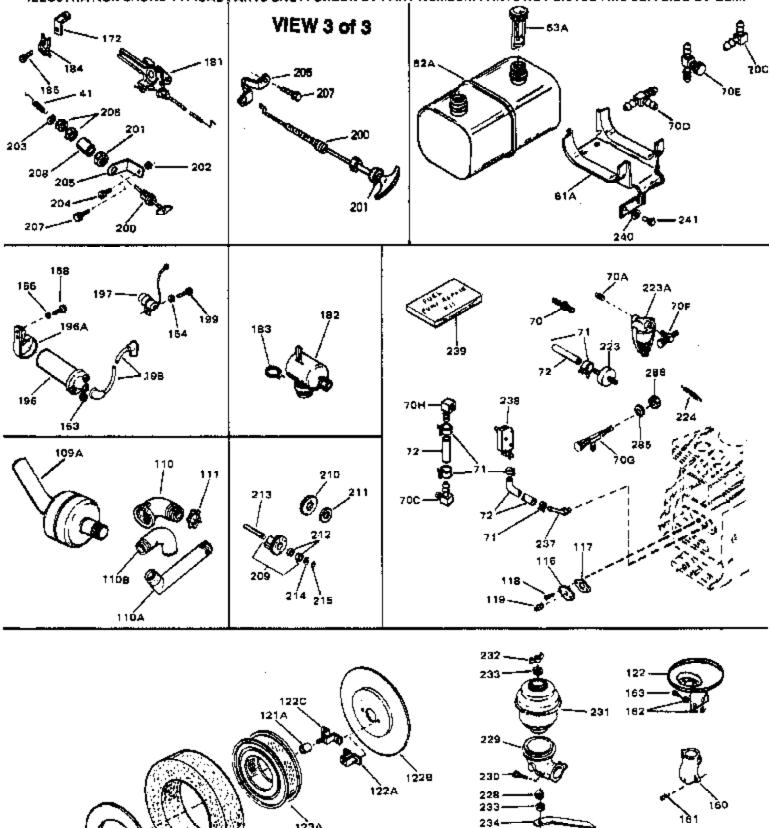

123A

124

228

227-

234A

	Davit Niconale an	Ot . Description
Ref #	Part Number	Qty Description
41	31967	Spring, Governor
62A	31977	Fuel Tank (Incl. 63)
71	26460	Clamp, Fuel line (Use as required)
72	30965	Fuel Line (Braided) (48") (Use as req uired)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
72	30705	Fuel Line (Braided) (16") (Use as req uired)
72	30962	Fuel Line (Braided) (32") (Use as req uired)
119	28534	Pipe Plug, 1/8-27 (Use as required)
119	9556	Plug, Pipe, 1/8-27 (Use as required)
122C	32907B	Bracket, Air cleaner
122B	34065	Bracket, Air cleaner
123A	32008	Element, Air cleaner