
## ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

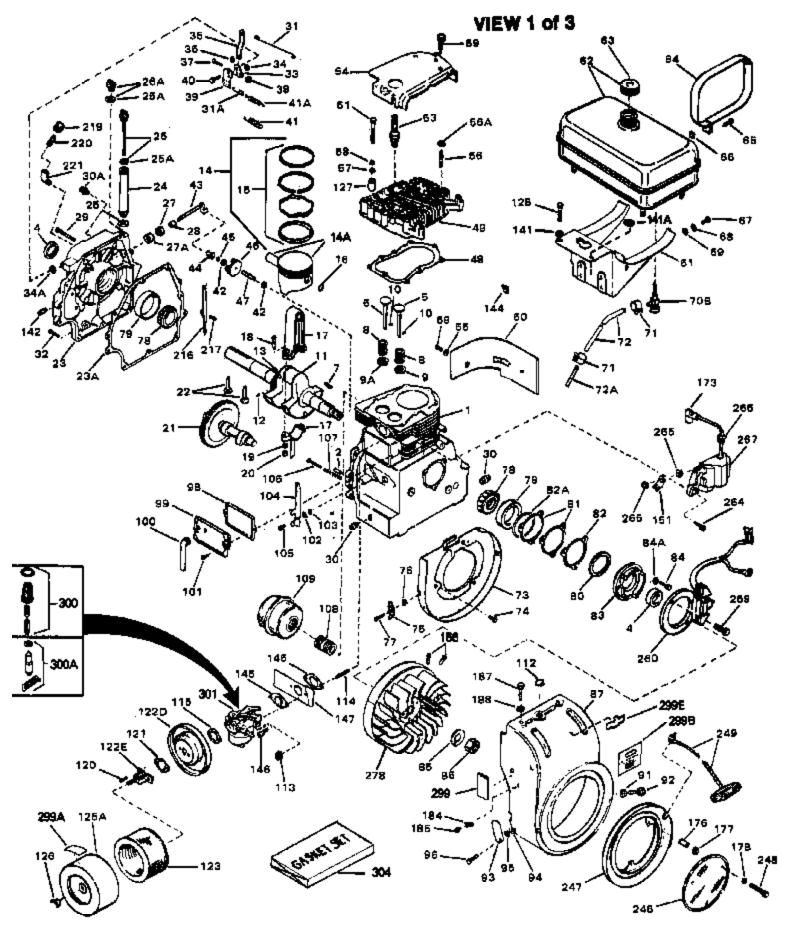


| Ref # | Part Number      | Otv | Description  |
|-------|------------------|-----|--|
|       | 33042            | Giy | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)  |
|       | 27652            |     | Pin, Dowel   |
|       | 31950            |     | Seal, Oil  |
|       | 31940            |     | Intake Valve (Std.)  |
|       | 31941            |     | Intake Valve (30.)<br>Intake Valve (1/32" OS) (Incl. 9)                                |
|       | 31942            |     | Exhaust Valve (Std.)   |
|       | 31943            |     |  |
|       |                  |     | Exhaust Valve (1/32" OS) (Incl. 9)   |
|       | 650592<br>21044  |     | Key, Flywheel  |
|       | 31944            |     | Spring, Valve  |
|       | 31946            |     | Cap, Lower valve spring (1/32" OS)   |
|       | 31945            |     | Cap, Lower valve spring (Std.)   |
|       | 31945<br>31946   |     | Cap, Lower valve spring (Std.)   |
|       |                  |     | Cap, Lower valve spring (1/32" OS)   |
|       | 20810<br>32291B  |     | Pin, Valve spring retainer   |
|       | 29783            |     | Crankshaft (Incl. 12, 13, 17, 78 & 79 )  |
|       |                  |     | Pin, Crankshaft gear   |
|       | 31931            |     | Gear, Crankshaft   |
|       | 32238B           |     | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")   |
|       | 32239B           |     | Piston & Pin Ass'y. (.010" OS) (Incl. 16)  |
|       | 32240B<br>32621B |     | Piston & Pin Ass'y. (.020" OS) (Incl. 16)<br>Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
|       |                  |     |  |
|       | 32622B           |     | Piston & Pin Ass'y. (.040" OS) (Incl. 16)  |
|       | 34511            |     | Piston, Pin & Ring Set (Std.) (3-1/2" Bore)  |
|       | 34512            |     | Piston, Pin & Ring Set (.010" OS)  |
|       | 34513            |     | Piston, Pin & Ring Set (.020" OS)  |
|       | 34524<br>34525   |     | Piston, Pin & Ring Set (.030" OS)  |
|       | 32241            |     | Piston, Pin & Ring Set (.040" OS)  |
|       | 32241            |     | Ring Set (Std.) (3-1/2" Bore)<br>Ring Set (.010" OS)                                   |
|       | 32243            |     | Ring Set (.020" OS)  |
|       | 32625            |     | Ring Set (.030" OS)  |
|       | 32626            |     | Ring Set (.040" OS)  |
|       | 32336            |     | Re-Ringing Set, Piston   |
|       | 31919            |     | Ring, Piston pin retaining   |
|       | 33093A           |     | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)  |
|       | 34383            |     | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)   |
|       | 34384            |     | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)   |
|       | 32077            |     | Bolt, Connecting rod   |
|       | 26073            |     | Washer, Connecting rod   |
|       | 28264            |     | Nut Assy., Lock  |
|       | 32150            |     | Camshaft (MCR)   |
|       | 31939            |     | Lifter, Valve  |
|       | 31956A           |     | * Gasket, Cylinder cover   |
|       | 32580A           |     | Cover, Cylinder (Incl. 4, 28, 30, 34, & 43)  |
|       | 31985            |     | Oil Fill Tube  |
|       | 29673            |     | * Gasket, Oil fill   |
|       | 29673            |     | * Gasket, Oil fill tube  |
|       | 33070            |     | Dipstick (Incl. 25A)   |
|       | 32426            |     | Spacer, Governor rod   |
|       | 650588           |     | Screw, 1/4-20 x 2"   |
|       | 31927            |     | Oil Drain Plug   |
|       | 31968            |     | Link, Governor   |
|       | 650451           |     | Screw, 1/4-20 x 1"   |
|       | 31964            |     | Clamp, Governor lever  |
|       | 29193            |     | Ring, Retaining  |
|       | 31963            |     | Lever, Governor adjusting  |
|       | 650518           |     | Lockwasher   |
|       | 650544           |     | Screw, 10-24 x 7/8"  |
|       |                  |     |  |

|     |         | Qty | Description   |
|-----|---------|-----|---|
| 38  | 7975    |     | Nut, 10-24  |
| 39  | 31965   |     | Plate, Governor spring  |
| 40  | 30312   |     | Screw, 10-32 x 1/2"   |
|     | 31967   |     | Spring, Governor  |
|     | 30590A  |     | Washer, Flat  |
|     | 32425   |     | Rod Assy., Governor   |
|     | 31948   |     | Spool, Governor   |
|     | 29193   |     | Ring, Retaining   |
|     |         |     |   |
|     | 31947   |     | Gear Assy., Governor  |
|     | 31930   |     | Shaft, Mechanical Governor                                    |
|     | 32246A  |     | * Gasket, Cylinder head                                       |
|     | 33034   |     | Head, Cylinder  |
| 51  | 650694A |     | Screw, 5/16-18 x 2" (Use as required)                         |
| 51  | 650711  |     | Screw, 5/16-18 x 1-5/8" (Use as required)                     |
| 51  | 650628A |     | Screw, 5/16-18 x 2-3/8" (Use as required)                     |
| 51  | 650695A |     | Screw, 5/16-18 x 2-1/4" (Use as required)                     |
|     | 650714  |     | Screw, 5/16-18 x 1-5/8" (Use as required)                     |
|     | 650697A |     | Screw, 5/16-18 x 2-1/2" (Use as required)                     |
|     | 650692  |     | Screw, 5/16-18 x 1-3/4" (Use as required)                     |
|     | 650603  |     |   |
|     |         |     | Screw, 5/16-18 x 5/8" (Use as require d)                      |
|     | 33636   |     | Resistor Spark Plug (RJ-8C)                                   |
|     | 34251   |     | Resistor Spark Plug (RJ-17LM)                                 |
|     | 33035   |     | Cover, Cylinder head  |
|     | 28537   |     | Washer, Plain   |
|     | 650691  |     | Washer, Flat (Use as required)                                |
| 58  | 650690  |     | Washer, Belleville (Use as required)                          |
| 58  | 8274    |     | Washer, Lock (Use as required)                                |
| 59  | 650128  |     | Screw, 10-24 x 1/2"   |
|     | 31976   |     | Extension, Blower housing                                     |
|     | 31978   |     | Bracket, Fuel tank  |
|     | 410144B |     | Fuel Cap (White Plastic)(Std.)(As req uired)                  |
|     | 34210   |     | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use a |
| 03  | 34210   |     | • • • • • • • • •   |
|     |         |     | required)   |
| 64  | 31979   |     | Strap, Fuel tank  |
|     | 650451  |     | Screw, 1/4-20 x 1"  |
|     | 650456  |     | Nut, Flange whiz-lock, 1/4-20                                 |
|     | 650517  |     | Screw, 1/4-20 x 27/32" (Use as required)                      |
|     | 650561  |     | Screw, $1/4-20 \times 5/8"$ (Use as required )                |
|     |         |     |   |
|     | 30063   |     | Screw, 1/4-20 x 1/2" (Use as required )                       |
|     | 792028  |     | Screw, 5/16-18 x 7/8" (Use as require d)                      |
|     | 8345    |     | Washer, Flat  |
|     | 8303    |     | Lockwasher  |
| 70B | 29683   |     | Strainer & Shut-off, Fuel                                     |
|     | 26460   |     | Clamp, Fuel line (Use as required)                            |
| 72  | 29774   |     | Fuel Line (Braided) (8.25") (Use as r equired)                |
|     | 30705   |     | Fuel Line (Braided) (16") (Use as req uired)                  |
|     | 30962   |     | Fuel Line (Braided) (32") (Use as req uired)                  |
|     | 30965   |     | Fuel Line (Braided) (48") (Use as req uired)                  |
|     |         |     |   |
|     | 32579   |     | Baffle, Blower housing  |
|     | 650561  |     | Screw, 1/4-20 x 5/8"  |
|     | 31932   |     | Bearing, Tapered roller                                       |
|     | 31928   |     | Cup, Bearing  |


|  |  | ty Description   |
|--|--|--|
| 80   | 32031  | Spacer, Steel (.010" thick) NOTE: Determine the gap<br>between the cover and the machined surface on the cylinder<br>which can be from .001"up to .007" in which case no shim<br>gaskets will be required. Use of gasket must be limited to a<br>combined total of .010" thick. Steel spacersmust be used<br>as required   |
| 81   | 31971  | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap<br>between the cover and the machined surface on the cylinder<br>which can be from .001"up to .007" in which case no shim<br>gaskets will be required. Use of gasket must be limited to a<br>combined total of .010" thick. Steel spacersmust be used<br>as req   |
| 82   | 31972  | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap<br>between the cover and the machined surface on the cylinder<br>which can be from .001"up to .007" in which case no shim<br>gaskets will be required. Use of gasket must be limited to a<br>combined total of .010" thick. Steel spacersmust be used<br>as req   |
|  | 32599<br>32577   | "O" Ring<br>Cover, Cylinder NOTE: Determine the gap between the cove<br>and the machined surface on the cylinder which can be from<br>.001"up to .007" in which case no shim gaskets will be<br>required. Use of gasket must be limited to a combined total<br>of .010" thick. Steel spacersmust be used as required to<br>eliminat  |
| 84<br>85<br>86<br>87<br>91<br>92<br>95<br>96<br>98<br>99<br>100<br>101<br>102<br>103<br>104<br>105<br>106<br>107<br>108<br>109<br>112<br>113<br>114<br>115<br>120<br>121<br>122D<br>122E | 650679<br>792028<br>650666<br>650594<br>33044A<br>8274<br>650595<br>8274<br>650624<br>31958<br>31957<br>35350<br>650128<br>28558<br>31966<br>31984A<br>650597<br>650591<br>33099<br>32042<br>32043B<br>33038<br>29752<br>650587<br>27272<br>650587<br>27272<br>650399<br>30767<br>32378<br>32039 | Lockwasher, 5/16" (Use as required)<br>Screw, 5/16-18 x 7/8"<br>Washer, Lock<br>Nut, Flywheel, 3/4-16<br>Blower Hsg. (Incl.73) (For electric s tarter)<br>Washer, Lock<br>Screw, 5/16-24 x 3/8"<br>Washer, Lock<br>Screw, 5/16-24 x 9/16"<br>* Gasket, Breather<br>Breather Assy.<br>Tube, Breather<br>Screw, 10-24 x 1/2"<br>Washer, Wave<br>Bushing, Control lever<br>Lever, Control<br>Screw, 10-24 x 5/8"<br>Screw, 10-24 x 2"<br>Spring<br>Nipple, Exhaust pipe<br>Muffler<br>Plug, Button (Use as required)<br>Nut & Lockwasher Assy.<br>Stud, Carburetor<br>* Gasket, Air cleaner<br>Screw, 10-32 x 5/8"<br>Spacer, Air cleaner<br>Bracket, Air cleaner<br>Bracket, Air cleaner |


| Ref # | Part Number Qty | Description  |
|-------|-----------------|--|
| 128   | 650713          | Screw, 5/16-18 x 5/8" (Use as require d)                                       |
| 128   | 650429          | Screw, 5/16-18 x 3/4" (Use as require d)                                       |
| 128   | 792028          | Screw, 5/16-18 x 7/8" (Use as require d)                                       |
| 141   | 26073           | Washer, Flat (Use as required)   |
| 141A  | 8274            | Lockwasher, Split (Use as required)  |
| 145   | 31960           | * Gasket, Carburetor   |
| 147   | 31959           | Baffle, Air  |
| 151   | 33356           | Terminal, Ground   |
| 156   | 730201          | Trigger Pin Kit (Use as required)  |
| 173   | 610118          | Cover, Spark plug (Use as required)  |
| 176   | 31992           | Spacer, Screen   |
| 177   | 8345            | Washer, 1/4 plain (Use as required)  |
| 178   | 27070           | Washer, Lock 1/4 E.T. (Use as require d)                                       |
| 178   | 650675          | Washer, Flat 1/4 (Use as required)   |
| 184   | 27793           | Clip, Conduit  |
| 185   | 28942           | Screw, 10-32 x 3/8"  |
| 187   | 650713          | Screw, 5/16-18 x 5/8"  |
| 188   | 26073           | Washer, Flat   |
| 246   | 33776           | Screen, Starter pulley   |
| 247   | 31980           | Pulley, Starter  |
| 248   | 650680          | Screw, 1/4-20 x 1-1/2"   |
| 249   | 32046           | Rope Assy., Starter (Use as required)  |
| 264   | 650661          | Screw, 1/4-20 x 3/4"   |
| 265   | 610408          | Nut, Hex   |
| 266   | 610750          | Grommet, Lead wire   |
| 267   | 610748          | Solid State Magneto (Incl.151,173,265 ,266)                                    |
| 278   | 610746          | Solid State Flywheel   |
| 299A  | 31752           | Decal, Air cleaner   |
| 299   | 34346           | Decal, Instruction   |
| 299B  | 550223          | Decal, Name  |
| 299B  | 32676           | Decal, Solid State   |
| 300   | 32411A          | Valve, Seat, Spring & Gasket Assy.   |
| 301   | 631498          | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 for breakdown) |
|       |                 | IVI DIGANUVIVI I   |
| 304   | 33237A          | * Gasket Set (Incl. items marked *)  |

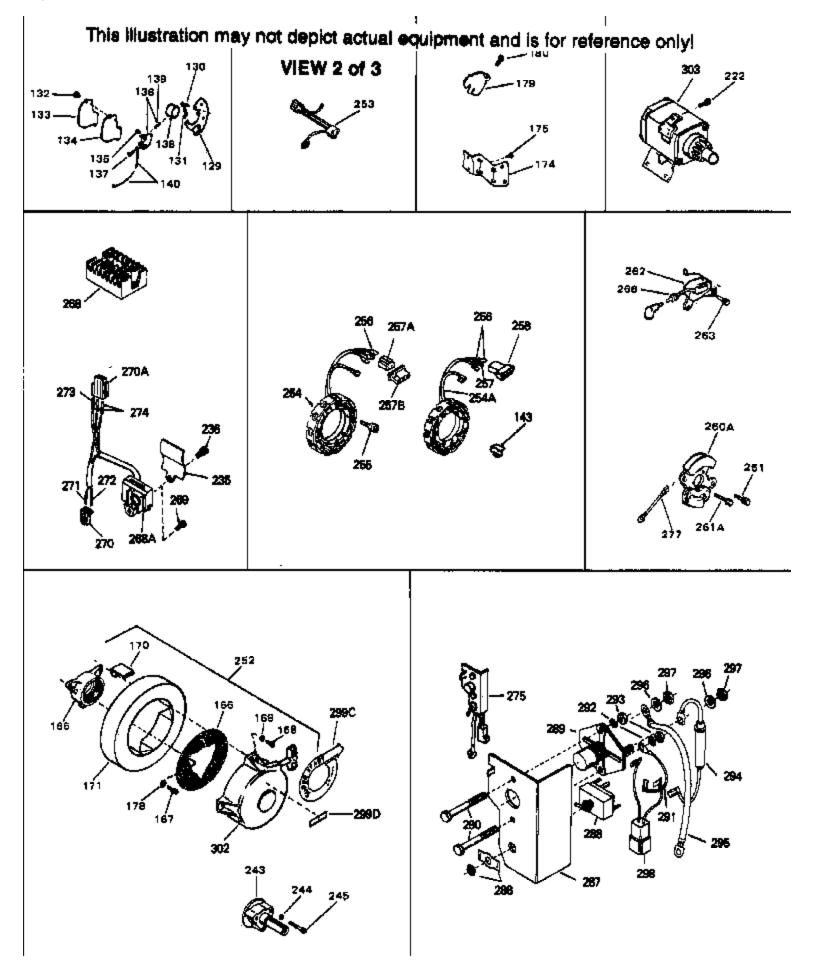


| Ref # | Part Number | Qty Description  |
|-------|-------------|--|
| 178   | 27070       | Washer, Lock 1/4 E.T. (Use as require d)   |
| 178   | 650675      | Washer, Flat 1/4 (Use as required)   |
| 180   | 650701      | Screw, 8-18 x 7/16" (Use as required)  |
|       | 792028      | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)   |
|       | 650781      | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)   |
| 235   | 34276       | Plate, Cover (Use as required to cover regulator mounting hole in blower housing)  |
| 236   | 650736      | Screw, 10-16 x 3/8" (Use as required)  |
| 252   | 730134      | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)   |
| 253   | 33018       | Harness Assy., Adapter (Use as requir ed)  |
| 254   | 610761      | Alternator Coil (Solid State) (10 Amp) (Incl. Nos. 253, 256 & 257A)  |
| 255   | 650416      | Screw, 10-32 x 1"  |
|       | 610922      | Terminal, Female   |
| 257B  | 610824      | Flat Connector (Female terminals) (As req.)  |
| 257A  | 610819      | Connector, Pyramid (For female termin als)   |
|       | 610750      | Grommet, Lead wire   |
|       | 610749      | Solid State Regulator (10 Amp)   |
|       | 730198      | Starter Switch Kit(Incl. 287-298) (As req.)  |
| 303   | 33835       | Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835<br>starter motors are used interchangeably on the se models.<br>Refer to service numberstamped on end cap of motor, or on<br>decal for identification. Refer to Division 5, Section D for<br>breakdown. |

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

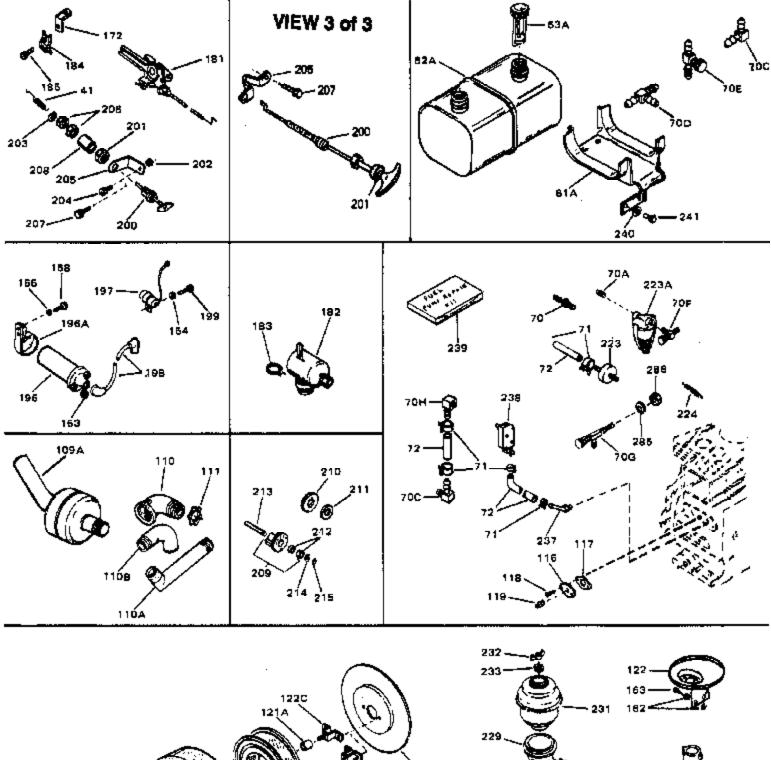

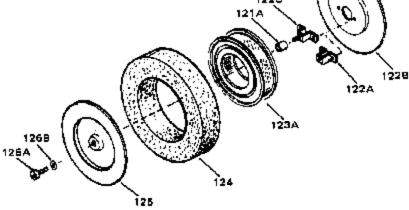



| Ref # | Part Number | Qty | Description                                    |
|-------|-------------|-----|--|
| 41    | 31967       |     | Spring, Governor                               |
| 62A   | 31977       |     | Fuel Tank (Incl. 63)                           |
| 71    | 26460       |     | Clamp, Fuel line (Use as required)             |
| 72    | 29774       |     | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72    | 30705       |     | Fuel Line (Braided) (16") (Use as required)    |
| 72    | 30962       |     | Fuel Line (Braided) (32") (Use as req uired)   |
| 72    | 30965       |     | Fuel Line (Braided) (48") (Use as req uired)   |
| 119   | 28534       |     | Pipe Plug, 1/8-27 (Use as required)            |
| 119   | 9556        |     | Plug, Pipe, 1/8-27 (Use as required)           |
| 123A  | 32008       |     | Element, Air cleaner                           |
| 184   | 27793       |     | Clip, Conduit                                  |
| 185   | 28942       |     | Screw, 10-32 x 3/8"                            |
| 237   | 32958       |     | Fitting, Fuel                                  |
| 238   | 32959       |     | Fuel Pump, Impulse                             |
| 239   | 33010       |     | Repair Kit, Impulse fuel pump                  |
|       |             |     | • • • • • •                                    |