
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

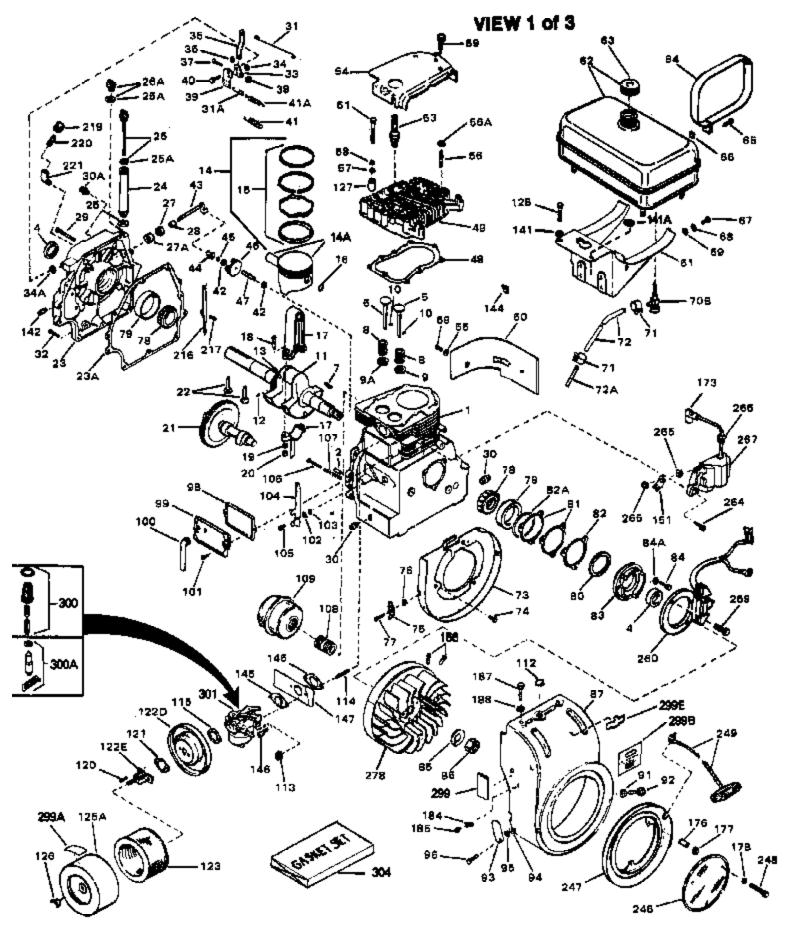


Dof #	Part Number	Ot /	Description
		QIY	Description
	33042		Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)
	27652		Pin, Dowel
	31950		Seal, Oil
	31940		Intake Valve (Std.)
	31941		Intake Valve (1/32" OS) (Incl. 9)
	31942		Exhaust Valve (Std.)
	31943		Exhaust Valve (1/32" OS) (Incl. 9)
	650592		Key, Flywheel
	31944		Spring, Valve
	31946		Cap, Lower valve spring (1/32" OS)
	31945		Cap, Lower valve spring (Std.)
	31945		Cap, Lower valve spring (Std.)
9A	31946		Cap, Lower valve spring (1/32" OS)
10	20810		Pin, Valve spring retainer
11	33390B		Crankshaft (Incl. 12, 13, 78 & 79)
12	29783		Pin, Crankshaft gear
13	31931		Gear, Crankshaft
	34511		Piston, Pin & Ring Set (Std.) (3-1/2" Bore)
	34512		Piston, Pin & Ring Set (.010" OS)
	34513		Piston, Pin & Ring Set (.020" OS)
	34524		Piston, Pin & Ring Set (.030" OS)
	34525		Piston, Pin & Ring Set (.040" OS)
	32238B		Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")
	32239B		Piston & Pin Ass'y. (.010" OS) (Incl. 16)
	32240B		Piston & Pin Ass'y. (.020" OS) (Incl. 16)
	32621B		Piston & Pin Ass'y. (.030" OS) (Incl. 16)
	32622B		Piston & Pin Ass'y. (.040" OS) (Incl. 16)
	32241		Ring Set (Std.) (3-1/2" Bore)
	32242		Ring Set (.010" OS)
	32243		Ring Set (.020" OS)
	32625		Ring Set (.030" OS)
	32626		Ring Set (.040" OS)
	32336		Re-Ringing Set, Piston
	31919		Ring, Piston pin retaining
	33093A		Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
	34383		
			Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)
	34384		Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)
	32077		Bolt, Connecting rod
	26073		Washer, Connecting rod
	28264		Nut Assy., Lock
	32150		Camshaft (MCR)
	31939		Lifter, Valve
	31956A		* Gasket, Cylinder cover
	32685		Cylinder Cover (Incl.4,25,26A,28,30,3 4 & 43)
	29673		* Gasket, Oil fill
	33069		Dipstick (Incl. 25A)
	32426		Spacer, Governor rod
	650588		Screw, 1/4-20 x 2"
	31927		Oil Drain Plug
	31968		Link, Governor
	650451		Screw, 1/4-20 x 1"
	31964		Clamp, Governor lever
34	29193		Ring, Retaining
35	31963		Lever, Governor adjusting
36	650518		Lockwasher
37	650544		Screw, 10-24 x 7/8"
	7975		Nut, 10-24
39	31965		Plate, Governor spring

	Screw, 10-32 x 1/2"
:	
	Spring, Governor
	Washer, Flat
	Rod Assy., Governor
	Spool, Governor
	•
	Ring, Retaining
	Gear Assy., Governor
	Shaft, Mechanical Governor
	* Gasket, Cylinder head
	Head, Cylinder
	Screw, 5/16-18 x 2" (Use as required)
	Screw, 5/16-18 x 1-5/8" (Use as required)
	Screw, 5/16-18 x 2-3/8" (Use as requi red)
	Screw, 5/16-18 x 2-1/4" (Use as required)
	Screw, 5/16-18 x 1-5/8" (Use as required)
	Screw, 5/16-18 x 2-1/2" (Use as required)
	Screw, 5/16-18 x 1-3/4" (Use as required)
	Screw, 5/16-18 x 5/8" (Use as require d)
	Resistor Spark Plug (RJ-8C)
	Resistor Spark Plug (RJ-17LM)
	Cover, Cylinder head
	Washer, Plain
	Washer, Flat (Use as required)
	Washer, Belleville (Use as required)
	Washer, Lock (Use as required)
	Screw, 10-24 x 1/2"
	Extension, Blower housing
	Bracket, Fuel tank
	Fuel Cap (White Plastic)(Std.)(As req uired)
	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
	required)
	Strap, Fuel tank
	Screw, 1/4-20 x 1"
	Nut, Flange whiz-lock, 1/4-20
	Screw, 1/4-20 x 27/32" (Use as required)
	Screw, 1/4-20 x 5/8" (Use as required)
	Screw, 1/4-20 x 1/2" (Use as required)
:	Screw, 5/16-18 x 7/8" (Use as require d)
:	Strainer & Shut-off, Fuel
	Clamp, Fuel line (Úse as required)
	Fuel Line (Braided) (32") (Use as req uired)
	Fuel Line (Braided) (48") (Use as req uired)
	Fuel Line (Braided) (8.25") (Use as required)
	Fuel Line (Braided) (16") (Use as req uired)
	Baffle, Blower housing
:	Screw, 1/4-20 x 5/8"
-	Terminal
	Grommet, Plastic
	Screw, 8-32 x 3/8"
	Bearing, Tapered roller
	Spacer, Steel (.010" thick) NOTE: Determine the gap
	between the cover and the machined surface on the cylinder
,	which can be from .001"up to .007" in which case no shim
(gaskets will be required. Use of dasket must be limited to a
	gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used

		Rty Description
81	31971	* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
82	31972	* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
	32599 32677	"O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat
84A 85 86 87 91 92 93 94 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 115 120 121 125A 126 128 128	650668 650679 650666 650594 33037 8274 650595 32039 650890 26073 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 27272 650399 30767 32810 650513 650713 650429 792028	Screw, 10-32 x 1" Lockwasher, 5/16" (Use as required) Washer, Lock Nut, Flywheel, 3/4-16 Blower Housing Washer, Lock Screw, 5/16-24 x 3/8" Switch, Stop Washer, Shakeproof Washer, Flat Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 3/4" (Use as require d)
141A 145 146	26073 8274 33263 650451 34061	Washer, Flat (Use as required) Lockwasher, Split (Use as required) * Gasket, Carburetor Screw, 1/4-20 x 1" Baffle, Air

Ref #	Part Number Qty	/ Description
156	730201	Trigger Pin Kit (Use as required)
173	610118	Cover, Spark plug (Use as required)
176	31992	Spacer, Screen
177	8345	Washer, 1/4 plain (Use as required)
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
184	27793	Clip, Conduit
185	28942	Screw, 10-32 x 3/8"
187	650713	Screw, 5/16-18 x 5/8"
188	26073	Washer, Flat
246	33776	Screen, Starter pulley
247	31980	Pulley, Starter
248	650680	Screw, 1/4-20 x 1-1/2"
249	32046	Rope Assy., Starter (Use as required)
266	610750	Grommet, Lead wire
278	610758	Flywheel
299	34346	Decal, Instruction
299B	550223	Decal, Name
299B	32676	Decal, Solid State
299A	31752	Decal, Air cleaner
300A	631021	Inlet Needle, Seat & Clip Assy.
301	631877	Carburetor (Incl. 145) (Refer to Division 5, Section A, page 134 for breakdown)
304	33237A	* Gasket Set (Incl. items marked *)

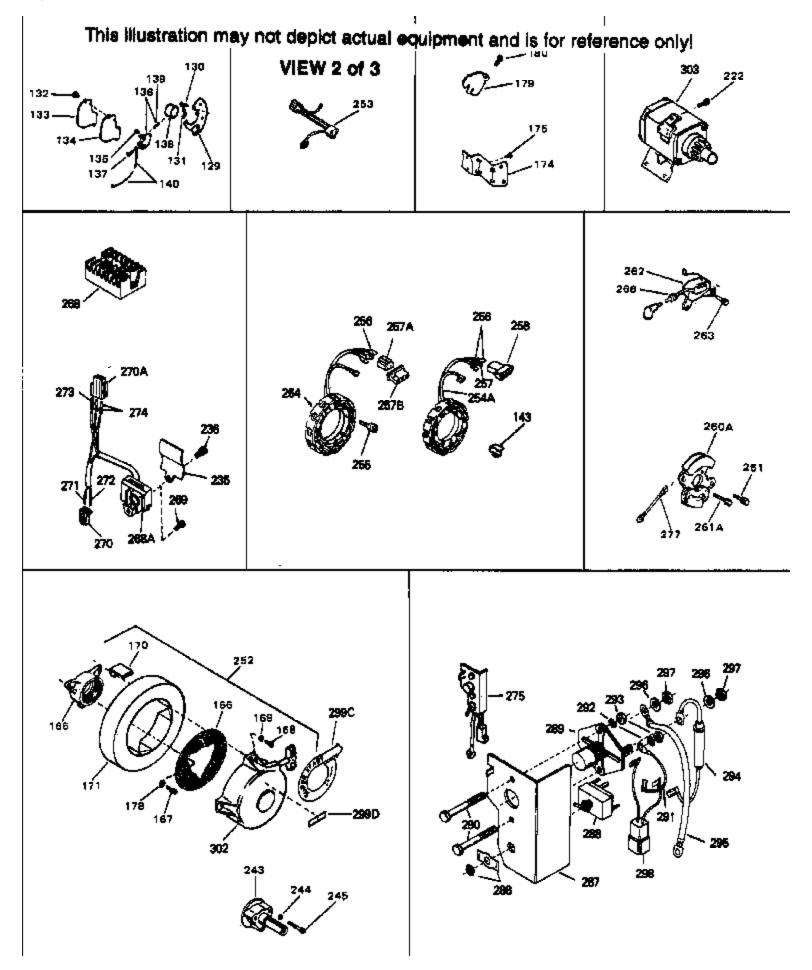

Ref #	Part Number C	ty Description
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
180	650701	Screw, 8-18 x 7/16" (Use as required)
222	792028	Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)
222	650781	Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)
235	34276	Plate, Cover (Use as required to cover regulator mounting hole in blower housing)
236	650736	Screw, 10-16 x 3/8" (Use as required)
252	730134	Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)
253	33018	Harness Assy., Adapter (Use as requir ed)
257B	610824	Flat Connector (Female terminals) (As req.)
260A	610759	Solid State Magneto
261	650489	Screw, 1/4-20 x 5/8"
261A	650669	Screw, 5/16-18 x 1-1/4"
262	610760	Solid State Transformer Ass'y.(Incl.1 73,266)
263	650561	Screw, 1/4-20 x 5/8"
266	610750	Grommet, Lead wire
275	730198	Starter Switch Kit(Incl. 287-298) (As req.)
277	30831	Ground Wire (Incl. 75)

1268


126A

Ć

Ĩ25

124

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

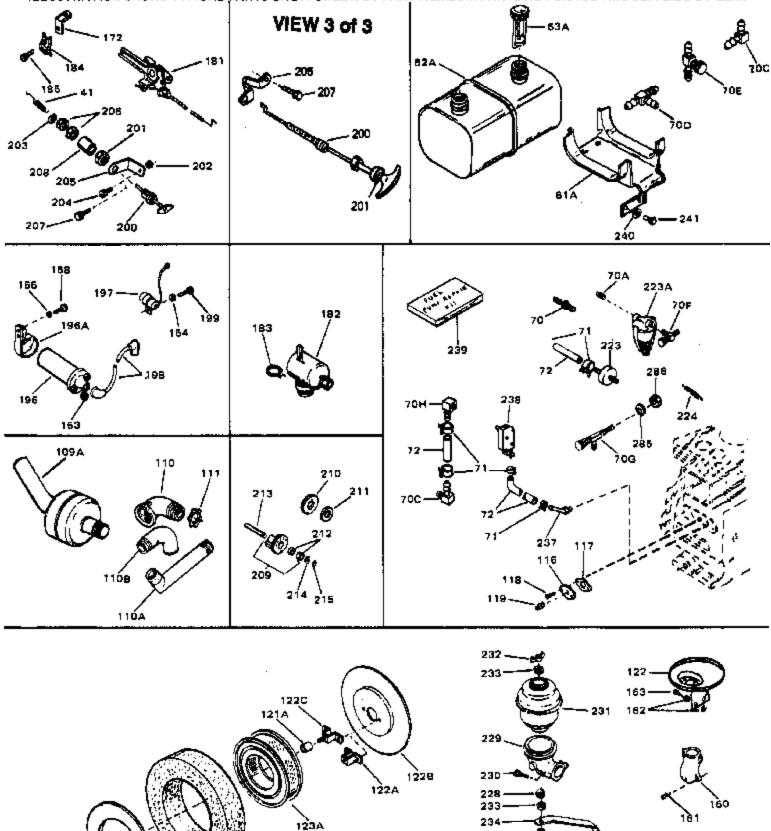

228

227-

234A

Ref #	Part Number Qt	y Description
	31967	Spring, Governor
62A	31977	Fuel Tank (Incl. 63)
71	26460	Clamp, Fuel line (Use as required)
72	30962	Fuel Line (Braided) (32") (Use as req uired)
72	30965	Fuel Line (Braided) (48") (Use as req uired)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
72	30705	Fuel Line (Braided) (16") (Use as req uired)
119	28534	Pipe Plug, 1/8-27 (Use as required)
119	9556	Plug, Pipe, 1/8-27 (Use as required)
122C	32907B	Bracket, Air cleaner
122B	34065	Bracket, Air cleaner
123A	32008	Element, Air cleaner
184	27793	Clip, Conduit
185	28942	Screw, 10-32 x 3/8"