
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

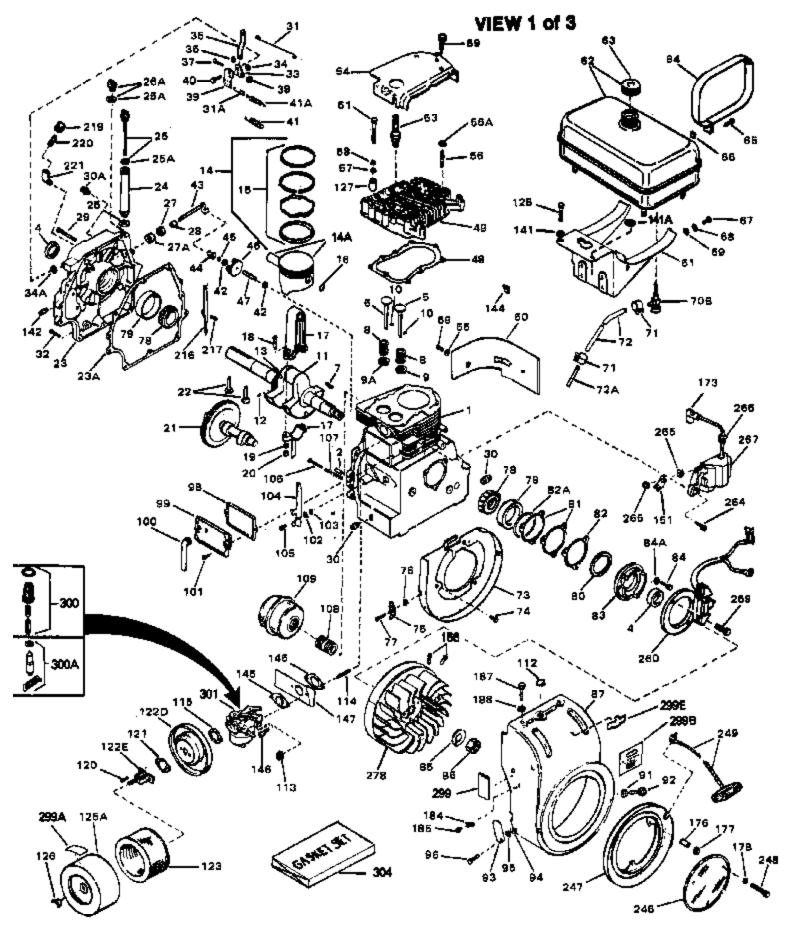


| Ref # | Part Number | Qty Description |
|-------|-------------|--|
| 1 | 33042 | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore) |
| 2 | 27652 | Pin, Dowel |
| | 31950 | Seal, Oil |
| | 31940 | Intake Valve (Std.) |
| | 31941 | Intake Valve (1/32" OS) (Incl. 9) |
| | 31942 | Exhaust Valve (Std.) |
| | 31943 | Exhaust Valve (0.1.) Exhaust Valve (1/32" OS) (Incl. 9) |
| | 650592 | Key, Flywheel |
| | 31944 | |
| | | Spring, Valve |
| | 31945 | Cap, Lower valve spring (Std.) |
| | 31946 | Cap, Lower valve spring (1/32" OS) |
| | 31946 | Cap, Lower valve spring (1/32" OS) |
| | 31945 | Cap, Lower valve spring (Std.) |
| | 20810 | Pin, Valve spring retainer |
| | 32530A | Crankshaft (Incl. 12, 13, 17, 78 & 79) |
| | 29783 | Pin, Crankshaft gear |
| | 31931 | Gear, Crankshaft |
| | 32238B | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") |
| | 32239B | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| 14A | 32240B | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| 14A | 32621B | Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
| 14A | 32622B | Piston & Pin Ass'y. (.040" OS) (Incl. 16) |
| 14 | 34511 | Piston, Pin & Ring Set (Std.) (3-1/2" Bore) |
| 14 | 34512 | Piston, Pin & Ring Set (.010" OS) |
| 14 | 34513 | Piston, Pin & Ring Set (.020" OS) |
| | 34524 | Piston, Pin & Ring Set (.030" OS) |
| | 34525 | Piston, Pin & Ring Set (.040" OS) |
| | 32241 | Ring Set (Std.) (3-1/2" Bore) |
| | 32242 | Ring Set (.010" OS) |
| | 32243 | Ring Set (.020" OS) |
| | 32625 | Ring Set (.030" OS) |
| | 32626 | Ring Set (.040" OS) |
| | 32336 | Re-Ringing Set, Piston |
| | 31919 | Ring, Piston pin retaining |
| | 33093A | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20) |
| | 34383 | |
| | | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) |
| | 34384 | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
| | 32077 | Bolt, Connecting rod |
| | 26073 | Washer, Connecting rod |
| | 28264 | Nut Assy., Lock |
| | 32150 | Camshaft (MCR) |
| | 31939 | Lifter, Valve |
| | 32685 | Cylinder Cover (Incl.4,25,26A,28,30,3 4 & 43) |
| | 31956A | * Gasket, Cylinder cover |
| | 29673 | * Gasket, Oil fill |
| | 33069 | Dipstick (Incl. 25A) |
| | 32426 | Spacer, Governor rod |
| 29 | 650588 | Screw, 1/4-20 x 2" |
| 30 | 31927 | Oil Drain Plug |
| 31 | 31968 | Link, Governor |
| 32 | 650451 | Screw, 1/4-20 x 1" |
| | 31964 | Clamp, Governor lever |
| | 29193 | Ring, Retaining |
| | 31963 | Lever, Governor adjusting |
| | 650518 | Lockwasher |
| | 650544 | Screw, 10-24 x 7/8" |
| | 7975 | Nut, 10-24 |
| | 31965 | Plate, Governor spring |
| | | |

| | | Description |
|----|----------------|--|
| 40 | 30312 | Screw, 10-32 x 1/2" |
| 41 | 31967 | Spring, Governor |
| 42 | 30590A | Washer, Flat |
| | 32425 | Rod Assy., Governor |
| | 31948 | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 31947 | |
| | | Gear Assy., Governor |
| | 31930 | Shaft, Mechanical Governor |
| | 32246A | * Gasket, Cylinder head |
| | 33034 | Head, Cylinder |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 650711 | Screw, 5/16-18 x 1-5/8" (Use as requi red) |
| 51 | 650628A | Screw, 5/16-18 x 2-3/8" (Use as requi red) |
| 51 | 650695A | Screw, 5/16-18 x 2-1/4" (Use as required) |
| 51 | 650714 | Screw, 5/16-18 x 1-5/8" (Use as required) |
| 51 | 650697A | Screw, 5/16-18 x 2-1/2" (Use as required) |
| | 650692 | Screw, 5/16-18 x 1-3/4" (Use as required) |
| | 650603 | Screw, $5/16-18 \times 5/8$ " (Use as require d) |
| | 33636 | Resistor Spark Plug (RJ-8C) |
| | 34251 | Resistor Spark Plug (RJ-17LM) |
| | 33035 | |
| | 28537 | Cover, Cylinder head |
| | | Washer, Plain |
| | 650691 | Washer, Flat (Use as required) |
| | 650690 | Washer, Belleville (Use as required) |
| | 8274 | Washer, Lock (Use as required) |
| | 650128 | Screw, 10-24 x 1/2" |
| | 31976 | Extension, Blower housing |
| 61 | 31978 | Bracket, Fuel tank |
| 63 | 410144B | Fuel Cap (White Plastic)(Std.)(As req uired) |
| 63 | 34210 | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
| | | required) |
| 64 | 31979 | Strap, Fuel tank |
| | 650451 | Screw, 1/4-20 x 1" |
| | 650456 | Nut, Flange whiz-lock, 1/4-20 |
| | 650517 | Screw, 1/4-20 x 27/32" (Use as required) |
| | 650561 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 30063 | |
| | | Screw, $1/4-20 \times 1/2$ " (Use as required) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 8345 | Washer, Flat |
| | 8303 | Lockwasher |
| | 29683 | Strainer & Shut-off, Fuel |
| | 26460 | Clamp, Fuel line (Use as required) |
| 72 | 29774 | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | Fuel Line (Braided) (16") (Use as req uired) |
| | 30962 | Fuel Line (Braided) (32") (Use as req uired) |
| | 30965 | Fuel Line (Braided) (48") (Use as req uired) |
| | 31975 | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 33356 | Terminal |
| | 28545 | |
| | | Grommet, Plastic |
| | 650760 | Screw, 8-32 x 3/8" |
| | | |
| 78 | 31932 31928 | Bearing, Tapered roller Cup, Bearing |


| | Part Number | Qty Description |
|--|--|---|
| 80 | 32031 | Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required |
| 81 | 31971 | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| 82 | 31972 | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| | 32599 32677 | "O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat |
| 84A 85 86 87 91 92 93 94 95 96 98 99 100 101 102 103 104 105 106 107 109 112 113 114 115 120 121 | 650668 650679 650666 650594 33037 8274 650595 32039 650890 26073 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32043B 33038 29752 650587 27272 650399 30767 32378 | Screw, 10-32 x 1" Lockwasher, 5/16" (Use as required) Washer, Lock Nut, Flywheel, 3/4-16 Blower Housing Washer, Lock Screw, 5/16-24 x 3/8" Switch, Stop Washer, Shakeproof Washer, Flat Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Muffler Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Bracket, Air cleaner |
| 122E | 32376 32009 | Bracket, Air cleaner Cover, Air cleaner |


| | | ty Description |
|------|--------|--|
| 126 | 650513 | Nut, Wing |
| 128 | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| 128 | 650429 | Screw, 5/16-18 x 3/4" (Use as require d) |
| 128 | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| 141A | 8274 | Lockwasher, Split (Use as required) |
| 141 | 26073 | Washer, Flat (Use as required) |
| | 31960 | * Gasket, Carburetor |
| 147 | 31959 | Baffle, Air |
| 156 | 730201 | Trigger Pin Kit (Use as required) |
| | 610118 | Cover, Spark plug (Use as required) |
| 176 | 31992 | Spacer, Screen |
| | 8345 | Washer, 1/4 plain (Use as required) |
| | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| | 650675 | Washer, Flat 1/4 (Use as required) |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 26073 | Washer, Flat |
| | 33776 | Screen, Starter pulley |
| | 31980 | Pulley, Starter |
| | 650680 | Screw, 1/4-20 x 1-1/2" |
| | 32046 | Rope Assy., Starter (Use as required) |
| | 610750 | Grommet, Lead wire |
| | 610758 | Flywheel |
| | 550223 | Decal, Name |
| | 32676 | Decal, Solid State |
| | 34346 | Decal, Instruction |
| | 31752 | Decal, Air cleaner |
| | 32255A | Valve, Seat, Spring & Gasket Assy. |
| 301 | 631533 | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 for breakdown) |
| 304 | 33237A | * Gasket Set (Incl. items marked *) |

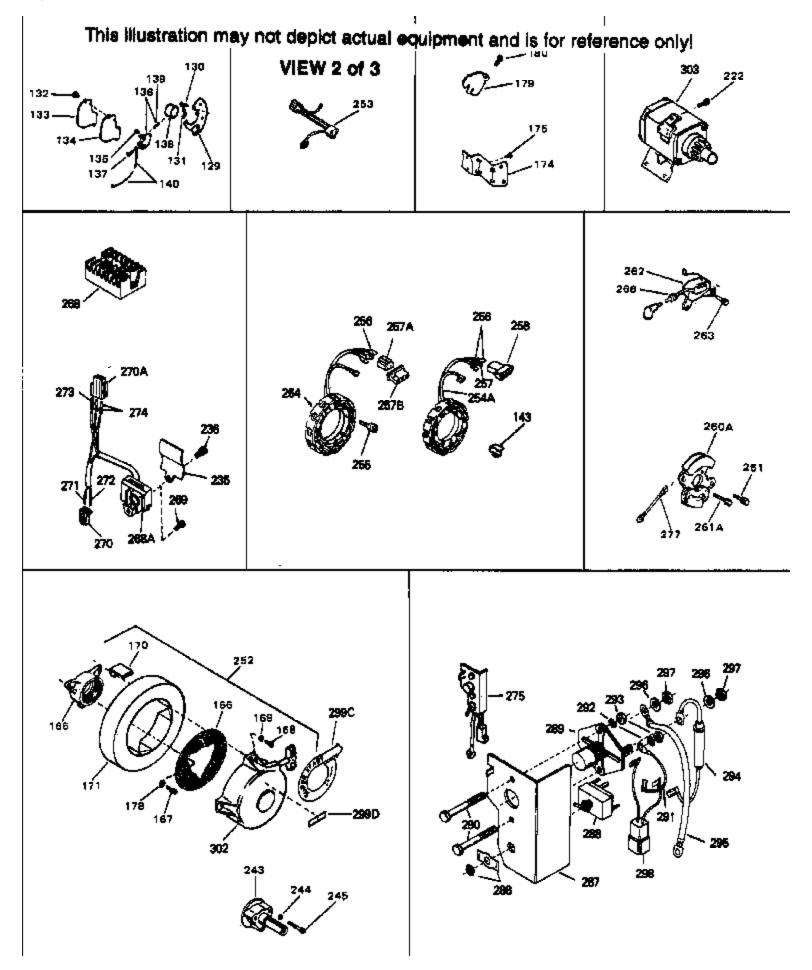


| Ref # | Part Number Q | ty Description |
|-------|---------------|---|
| 178 | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | Washer, Flat 1/4 (Use as required) |
| 180 | 650701 | Screw, 8-18 x 7/16" (Use as required) |
| 222 | 792028 | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) |
| 222 | 650781 | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) |
| 235 | 34276 | Plate, Cover (Use as required to cover regulator mounting hole in blower housing) |
| 236 | 650736 | Screw, 10-16 x 3/8" (Use as required) |
| 252 | 730134 | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required) |
| 253 | 33018 | Harness Assy., Adapter (Use as requir ed) |
| 257B | 610824 | Flat Connector (Female terminals) (As req.) |
| 260A | 610759 | Solid State Magneto |
| 261 | 650489 | Screw, 1/4-20 x 5/8" |
| 261A | 650669 | Screw, 5/16-18 x 1-1/4" |
| 262 | 610760 | Solid State Transformer Ass'y.(Incl.1 73,266) |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 610750 | Grommet, Lead wire |
| | 730198 | Starter Switch Kit(Incl. 287-298) (As req.) |
| 277 | 30831 | Ground Wire (Incl. 75) |

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

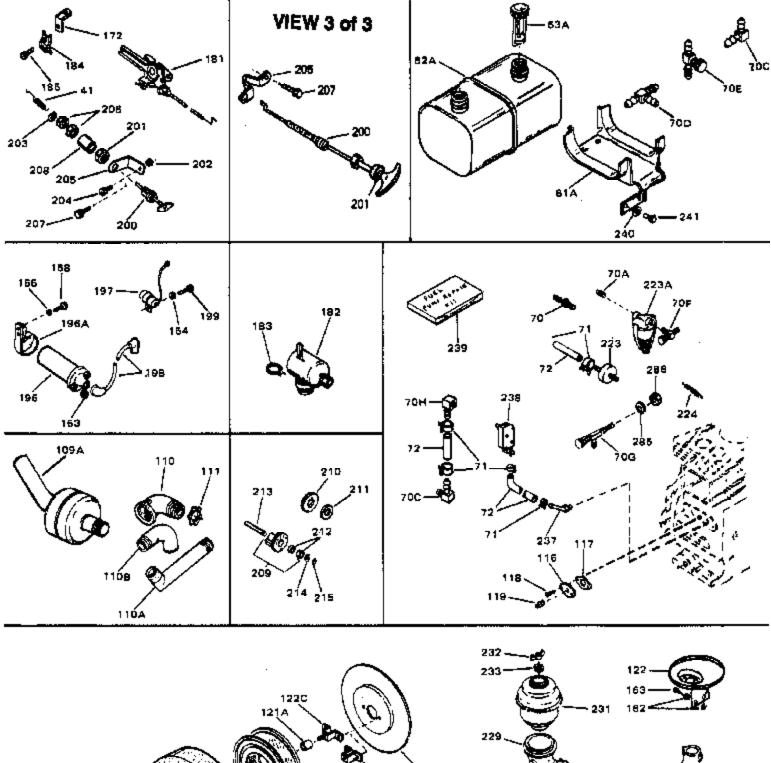

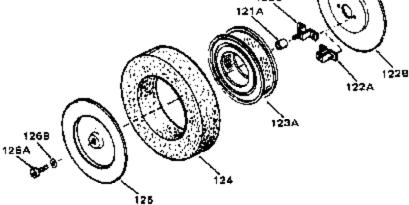



| Ref # | Part Number 0 | Qty E | Description |
|-------|---------------|-------|--|
| 41 | 31967 | 5 | Spring, Governor |
| 62A | 31977 | F | Fuel Tank (Incl. 63) |
| 70 | 29634 | F | Fitting, Fuel line |
| 71 | 26460 | (| Clamp, Fuel line (Use as required) |
| 72 | 29774 | F | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | | Fuel Line (Braided) (16") (Use as required) |
| 72 | 30962 | F | Fuel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | F | Fuel Line (Braided) (48") (Use as req uired) |
| 110A | 32585 | 5 | 55 Degree Exhaust Elbow |
| 111 | 650590 | Ν | Nut, Conduit |
| 119 | 28534 | F | Pipe Plug, 1/8-27 (Use as required) |
| 119 | 9556 | F | Plug, Pipe, 1/8-27 (Use as required) |
| 123A | 32008 | E | Element, Air cleaner |
| 184 | 27793 | (| Clip, Conduit |
| 185 | 28942 | S | Screw, 10-32 x 3/8" |
| | | | |