
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

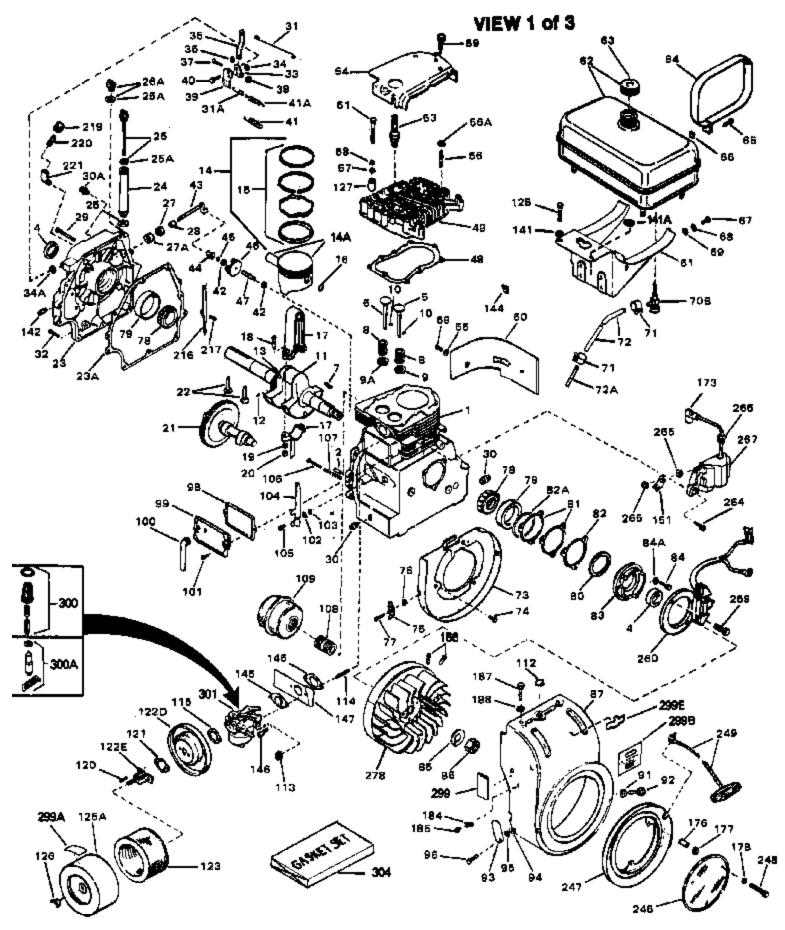


| Ref # Part Number | Qty Description |
|-------------------|--|
| 1 33042 | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore) |
| 2 27652 | Pin, Dowel |
| 4 31950 | Seal, Oil |
| 5 31940 | Intake Valve (Std.) |
| 5 31941 | Intake Valve (1/32" OS) (Incl. 9) |
| 6 31942 | Exhaust Valve (Std.) |
| 6 31943 | Exhaust Valve (1/32" OS) (Incl. 9) |
| 7 650592 | Key, Flywheel |
| 8 31944 | Spring, Valve |
| 9 31946 | Cap, Lower valve spring (1/32" OS) |
| 9 31945 | Cap, Lower valve spring (Std.) |
| 9A 32475 | Cap, Lower valve spring (Rotator) |
| 10 20810 | Pin, Valve spring retainer |
| 11 33393A | Crankshaft (Incl. 12, 13, 78 & 79) |
| 12 29783 | Pin, Crankshaft gear |
| 13 31931 | Gear, Crankshaft |
| 14A 32238B | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") |
| 14A 32239B | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| 14A 32240B | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| 14A 32621B | Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
| 14A 32622B | Piston & Pin Ass'y. (.040" OS) (Incl. 16) |
| 14 34511 | Piston, Pin & Ring Set (Std.) (3-1/2" Bore) |
| 14 34512 | Piston, Pin & Ring Set (.010" OS) |
| 14 34513 | Piston, Pin & Ring Set (.020" OS) |
| 14 34524 | Piston, Pin & Ring Set (.030" OS) |
| 14 34525 | Piston, Pin & Ring Set (.040" OS) |
| 15 32241 | Ring Set (Std.) (3-1/2" Bore) |
| 15 32242 | Ring Set (.010" OS) |
| 15 32243 | Ring Set (.020" OS) |
| 15 32625 | Ring Set (.030" OS) |
| 15 32626 | Ring Set (.040" OS) |
| 15 32336 | Re-Ringing Set, Piston |
| 16 31919 | Ring, Piston pin retaining |
| 17 33093A | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20) |
| 17 34383 | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) |
| 17 34384 | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
| 18 32077 | Bolt, Connecting rod |
| 19 26073 | Washer, Connecting rod |
| 20 28264 | Nut Assy., Lock |
| 21 32150 | Camshaft (MCR) |
| 22 31939 | Lifter, Valve |
| 23A 31956A | * Gasket, Cylinder cover |
| 23 32685 | Cylinder Cover (Incl.4,25,26A,28,30,3 4 & 43) |
| 24 31985 | Oil Fill Tube |
| 25A 29673 | * Gasket, Oil fill |
| 25 29673 | * Gasket, Oil fill tube |
| 26 33070 | Dipstick (Incl. 25A) |
| 28 32426 | Spacer, Governor rod |
| 29 650588 | Screw, 1/4-20 x 2" |
| 30 31927 | Oil Drain Plug |
| 31 31968 | Link, Governor |
| 32 650451 | Screw, 1/4-20 x 1" |
| 33 31964 | Clamp, Governor lever |
| 34 29193 | Ring, Retaining |
| 35 31963 | Lever, Governor adjusting |
| 36 650518 | Lockwasher |
| 37 650544 | Screw, 10-24 x 7/8" |
| 38 7975 | Nut, 10-24 |
| | |

| 38 31965 Plate, Governor spring 40 30312 Sorew, 10.32 x 1/2" 41 31967 Spring, Governor 42 30590A Washer, Flat 43 32425 Rod Assy, Governor 44 31948 Spring, Governor 45 23193 Fing, Retaining 46 31947 Gear Assy, Governor 47 31930 Shaft, Mechanical Governor 48 32246A * Gasket, Cylinder head 49 30334 Head, Cylinder 51 650695A Sorew, 511618 x 1.476" (Use as required) 51 650695A Sorew, 511618 x 1.474" 51 650697A Sorew, 511618 x 1.474" 52 8537 Washer, Plain 53 4251 Resistor Spark Plug (R-H2)LM) 54 526537 Washer, Plain 55 265081 Washer, Flat (Use as required) 58 | | Part Number Qty | |
|--|----|-----------------|--|
| 41 31967 Spring, Governor 43 32425 Rod Assy., Governor 44 31946 Spool, Governor 44 31947 Gear Assy., Governor 45 29193 Ring, Retaining 46 31947 Gear Assy., Governor 47 31830 Shaft, Micchanical Governor 48 32246A * Gasket, Cylinder head 49 30304 Head, Cylinder 48 32246A * Gasket, Cylinder head 49 30304 Head, Cylinder 51 650084A Screw, Srif-18 x 2-187 (Use as required) 51 650085A Screw, Srif-18 x 1-127 (Use as required) 51 650082A Screw, Srif-18 x 1-127 (Use as required) 51 650082A Screw, Srif-18 x 1-127 (Use as required) 51 650082 Screw, Srif-18 x 1-127 (Use as required) 51 650082 Screw, Srif-18 x 1-127 (Use as required) 53 34251 Resistor Spark Plug (R-H2C) 53 34251 Resistor Spark Plug (R-H2C) | 39 | 31965 | Plate, Governor spring |
| 42 30265 Rod Assy. Governor 43 31948 Spool, Governor 45 29193 Ring, Retaining 46 31947 Gear Assy., Governor 47 31930 Shaft, Machanical Governor 48 32246A "Gasket, Cylinder Inead 49 33034 Head, Cylinder 51 650694A Screw, S16-18 x 2-38" (Use as required) 51 650695A Screw, S16-18 x 2-38" (Use as required) 51 650695A Screw, S16-18 x 2-38" (Use as required) 51 650697A Screw, S16-18 x 2-34" (Use as required) 51 650692 Screw, S16-18 x 2-34" (Use as required) 51 650692 Screw, S16-18 x 2-44" (Use as required) 53 3325 Cover, Cylinder head 53 33251 Resistor Spark Flug (R-17LM) 54 33035 Cover, Cylinder head 52 3537 Washer, Flat (Use as required) 54 860500 Washer, Flat (Use as required) 55 860500 Washer, Flat (Use as required) 56 600128 Screw, 1/4-20 x 1" | 40 | 30312 | Screw, 10-32 x 1/2" |
| 43 32425 Rod Assy. Governor 44 31946 Spool. Governor 45 29193 Ring, Retaining 46 31947 Gear Assy., Governor 47 31930 Shaft, Mechanical Governor 48 32246A * Gasket, Cylinder head 49 33034 Head, Cylinder 48 32246A * Screw, Srife-18 x 2-187 (Use as required) 51 650711 Screw, Srife-18 x 2-38" (Use as required) 51 650724 Screw, Srife-18 x 2-34" (Use as required) 51 650744 Screw, Srife-18 x 1-58" (Use as required) 51 650692 Screw, Srife-18 x 1-58" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650691 Resistor Spark Plug (R-47CUM) 53 33363 Covernor 54 33035 Covernor 55 26537 Washer, Palin 56 650691 Washer, Flat (Use as required) 58 8274 Washer, Load (Use as required) 59 650128 Screw, 14-20 X 1" 61 <t< td=""><td>41</td><td>31967</td><td>Spring, Governor</td></t<> | 41 | 31967 | Spring, Governor |
| 43 32425 Rod Assy. Governor 44 31946 Spool. Governor 45 29193 Ring, Retaining 46 31947 Gear Assy., Governor 47 31930 Shaft, Mechanical Governor 48 32246A * Gasket, Cylinder head 49 33034 Head, Cylinder 48 32246A * Screw, Srife-18 x 2-187 (Use as required) 51 650711 Screw, Srife-18 x 2-38" (Use as required) 51 650724 Screw, Srife-18 x 2-34" (Use as required) 51 650744 Screw, Srife-18 x 1-58" (Use as required) 51 650692 Screw, Srife-18 x 1-58" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650692 Screw, Srife-18 x 1-34" (Use as required) 51 650691 Resistor Spark Plug (R-47CUM) 53 33363 Covernor 54 33035 Covernor 55 26537 Washer, Palin 56 650691 Washer, Flat (Use as required) 58 8274 Washer, Load (Use as required) 59 650128 Screw, 14-20 X 1" 61 <t< td=""><td>42</td><td>30590A</td><td>Washer, Flat</td></t<> | 42 | 30590A | Washer, Flat |
| 44 31948 Spool, Covernor 45 29193 Ring, Retaining 46 31947 Gear Assy., Governor 47 31930 Shaft, Mechanical Governor 48 32246A "Gasket, Cylinder head 49 33034 Head, Cylinder 51 650054A Screw, Srif-18 x 2-38" (Use as required) 51 650052A Screw, Srif-18 x 2-38" (Use as required) 51 6500571 Screw, Srif-18 x 2-38" (Use as required) 51 6500574 Screw, Srif-18 x 2-38" (Use as required) 51 6500697 Screw, Srif-18 x 2-38" (Use as required) 51 6500692 Screw, Srif-18 x 2-34" (Use as required) 53 36363 Resistor Spark Plug (R-17LM) 54 33035 Cover, Cylinder head 52 2537 Washer, Flat (Use as required) 54 850080 Washer, Ealeville (Use as required) 58 850050 Washer, Lock (Use as required) 58 650128 Screw, 14-20 x 1" 59 650128 Screw, 14-20 | | | |
| 45 29193 Ring, Retaining 46 31947 Gear Assy, Governor 47 31930 Shafi, Mechanical Governor 48 32246A "Gasket, Cylinder head 49 30304 Head 49 30304 Head 51 650054A Screw, 5/16-18 x 2'' (Use as required) 51 650025A Screw, 5/16-18 x 2-38'' (Use as required) 51 650035A Screw, 5/16-18 x 2-14'' (Use as required) 51 650097A Screw, 5/16-18 x 2-12'' (Use as required) 51 650087A Screw, 5/16-18 x 2-12'' (Use as required) 51 650087A Screw, 5/16-18 x 2-12'' (Use as required) 51 650087A Screw, 5/16-18 x 2-12'' (Use as required) 51 650087A Screw, 5/16-18 x 2-12'' (Use as required) 53 34251 Resistor Spark Plug (RJ-17LM) 53 34251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover Anter Asse 56 Screw, 10-24 x 1/2' Screw, 10-24 x 1/2' 66 60128 Screw, 10-24 x 1/2' 66 605050 Washer, Fla | | | |
| 46 31947 Geär Assy., Governor 47 31930 Shaft, Mechanical Governor 48 32246A " Gasket, Cylinder head 49 30034 Head, Cylinder head 41 50084A Screw, S/16-18 x 2" (Use as required) 51 6500228A Screw, S/16-18 x 2-330" (Use as required) 51 650095A Screw, S/16-18 x 2-142" (Use as required) 51 650097A Screw, S/16-18 x 2-124" (Use as required) 51 650097A Screw, S/16-18 x 2-124" (Use as required) 51 650097A Screw, S/16-18 x 2-124" (Use as required) 51 650097A Screw, S/16-18 x 2-124" (Use as required) 51 650097A Screw, S/16-18 x 2-124" (Use as required) 53 34251 Resistor Spark Plug (RJ-12LM) 53 34251 Resistor Spark Plug (RJ-12LM) 54 33035 Cover, Cylinder head 55 26537 Washer, Flat (Use as required) 58 8674 Washer, Elefwile (Use as required) 58 8674 Washer, Elefwile (Use as required) 59 650128 Screw, 14-20 x 112" < | | | |
| 47 31930 Shaft, Mechanical Governor 48 32246A " Gasket, Cylinder head 51 650054A Screw, 5/16-18 x 2' (Use as required) 51 6500711 Screw, 5/16-18 x 2-38'' (Use as required) 51 650025A Screw, 5/16-18 x 2-38'' (Use as required) 51 650025A Screw, 5/16-18 x 2-14'' (Use as required) 51 6500697A Screw, 5/16-18 x 2-12'' (Use as required) 51 6500603 Screw, 5/16-18 x 1-34'' (Use as required) 51 6500603 Screw, 5/16-18 x 5/8'' (Use as required) 53 3636 Resistor Spark Plug (R-1-7LM) 53 36363 Resistor Spark Plug (R-1-7LM) 54 30035 Cover, Cylinder Head 55 28537 Washer, Flat (Use as required) 58 8274 Washer, Eacl (Use as required) 58 8274 Washer, Eacleville (Use as required) 63 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 34210 Fuel Cap (Red Plasto) (Su)/As req uired) 64 31979 Strap, Fuel tank | | | |
| 48 32246A " Gasket, Cylinder head 49 30304 Head, Cylinder 51 650694A Screw, 5/16-18 x 2" (Use as required) 51 6500258A Screw, 5/16-18 x 2-3/8" (Use as required) 51 65002574 Screw, 5/16-18 x 2-3/8" (Use as required) 51 6500677A Screw, 5/16-18 x 1-5/8" (Use as required) 51 6500672 Screw, 5/16-18 x 1-3/4" (Use as required) 51 6500682 Screw, 5/16-18 x 1-3/4" (Use as required) 53 34251 Resistor Spark Plug (RJ-17LM) 53 34251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover, Cylinder head 57 650690 Washer, Flain (Use as required) 58 8274 Washer, Flain (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 61 31976 Extension, Blower housing 61 31976 Stres, 71-24 x 1/2" 63 34210 Fuel Cap (White Plastic)(Std.)(As req uired) 64 31979 Stres, 71-420 x 1/1" 65 <td< td=""><td></td><td></td><td></td></td<> | | | |
| 49 33034 Head, Cylinder 51 650694A Screw, 5716-18 x 2-87 (Use as required) 51 650711 Screw, 5716-18 x 2-387 (Use as required) 51 650628A Screw, 5716-18 x 2-387 (Use as required) 51 65074 Screw, 5716-18 x 1-587 (Use as required) 51 650697A Screw, 5716-18 x 1-347 (Use as required) 51 650692 Screw, 5716-18 x 1-347 (Use as required) 53 33336 Resistor Spark Plug (R-Use as required) 53 33336 Resistor Spark Plug (R-Use as required) 53 33336 Cover, Cylinder head 54 33035 Cover, Cylinder head 55 28537 Washer, Flait (Use as required) 56 650630 Washer, Flait (Use as required) 58 650640 Washer, Flait (Use as required) 58 650640 Washer, Flait (Use as required) 58 6506512 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31979 Strap, Fuel tank 62 50128 Screw, 14-20 x 1/2 63 41014 | | | |
| 51 650694A Screw, 5/16-18 x 2-108 as required) 51 650711 Screw, 5/16-18 x 2-36" (Use as required) 51 650628A Screw, 5/16-18 x 2-36" (Use as required) 51 650697A Screw, 5/16-18 x 1-56" (Use as required) 51 650697A Screw, 5/16-18 x 1-34" (Use as required) 51 650697A Screw, 5/16-18 x 1-34" (Use as required) 51 650603 Screw, 5/16-18 x 5/2" (Use as required) 51 650603 Screw, 5/16-18 x 5/2" (Use as required) 53 33256 Resistor Spark Plug (RL-HZM) 53 33251 Resistor Spark Plug (RL-HZM) 54 33035 Cover, Cylinder head 55 28537 Washer, Plain 56 560690 Washer, Belleville (Use as required) 58 8274 Washer, Deldville (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 4210 Fuel Cap (Red Plastic) (Sput resistant, High profile) (Use as required) 64 31979 Strap, Fuel tank | | | |
| 51 55028A Screw, 5/16-18 x 2-3/8" (Use as required) 51 650695A Screw, 5/16-18 x 2-1/4" (Use as required) 51 650714 Screw, 5/16-18 x 1-3/8" (Use as required) 51 650697A Screw, 5/16-18 x 1-3/8" (Use as required) 51 650692 Screw, 5/16-18 x 1-3/4" (Use as required) 51 650692 Screw, 5/16-18 x 1-3/4" (Use as required) 53 33636 Resistor Spark Plug (RJ-BC) 53 33251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover, Cylinder head 55 28537 Washer, Flat 56 50690 Washer, Eleville (Use as required) 58 850690 Washer, Lock (Use as required) 58 8274 Washer, Lock (Use as required) 59 560128 Screw, 1/4-20 60 31976 Extension, Blower housing 61 31979 Strap, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std)(As req uired) 64 31979 Strap, Fuel tank 66 50451 Screw, 1/4-20 x 1/2" 66 Screw, 1/4-20 x 2/3 | | | |
| 51 650628A Screw, 5/16-18 x 2-3/14" (Use as required) 51 650714 Screw, 5/16-18 x 1-5/8" (Use as required) 51 650697A Screw, 5/16-18 x 1-3/4" (Use as required) 51 650692 Screw, 5/16-18 x 1-3/4" (Use as required) 53 36366 Resistor Spark Plug (RJ-8C) 53 34251 Resistor Spark Plug (RJ-8C) 54 30035 Cover, Cylinder head 57 650691 Washer, Flair (Use as required) 58 650630 Washer, Flair (Use as required) 58 650691 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std.)(As req uired) 64 31979 Strap, Fuel tank 65 Screw, 1/4-20 x 1" 6650451 6650451 Screw, 1/4-20 x 1" 66 Screw, 1/4-20 x 578" (Use as required) 67 505061 Screw, 1/4-20 x 17" 66 Screw, 1/4-20 x 17" 100 | | | |
| 51 65095A Screw, 5/16-18 x 1-5/8" (Use as required) 51 650714 Screw, 5/16-18 x 1-5/8" (Use as required) 51 650697A Screw, 5/16-18 x 2-1/2" (Use as required) 51 650692 Screw, 5/16-18 x 5/4" (Use as required) 53 33636 Resistor Spark Plug (RJ-8C) 53 334251 Resistor Spark Plug (RJ-8C) 54 33035 Cover, Cylinder head 57 650691 Washer, Flat (Use as required) 58 650690 Washer, Belleville (Use as required) 58 650690 Washer, Belleville (Use as required) 59 650128 Screw, 1/4-20 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 34210 Fuel Cap (Red Plastic) (Sturt resistant, High profile) (Use as required) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 27/32" (Use as required) 67 600561 Screw, 1/4-20 x 27/32" (Use as required) 67 600561 Screw, 1/4-20 x 27/32" (Use as required) 67 70063 Screw, 1/4-20 x 27/32" | | | |
| 51 650714 Screw, 5/16-18 x 1-5/8" (Use as required) 51 650697A Screw, 5/16-18 x 1-2/8" (Use as required) 51 650692 Screw, 5/16-18 x 1-3/4" (Use as required) 53 36366 Reistor Spark Plug (RJ-8C) 53 34251 Reistor Spark Plug (RJ-9C) 54 33035 Cover, Cylinder head 55 28537 Washer, Plain 57 650691 Washer, Flat (Use as required) 58 850600 Washer, Lock (Use as required) 58 8574 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 4210 Fuel Cap (Red Plastic) (Sput resistant, High profile) (Use as required) 64 31979 Straey, 1/4-20 x 1" 66 650451 Screw, 1/4-20 x 1" 66 650451 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 5/8" (Use as required) 68 Sc | | | |
| 51 650697A Screw, 5/16-18 x 1-3/4" (Use as required) 51 650603 Screw, 5/16-18 x 5/8" (Use as required) 53 33636 Resistor Spark Plug (RJ-8C) 53 34251 Resistor Spark Plug (RJ-8C) 54 33035 Cover, Cylinder head 55 28537 Washer, Plain 56 Sofe80 Washer, Flair (Use as required) 58 650690 Washer, Flair (Use as required) 58 650690 Washer, Flair (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 34210 Fuel Cap (White Plastic) (Stul./As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650561 Screw, 5/16-18 x 7/8" (Use as required) 67 792028 Screw, 1/4-20 x 1/2" (Use as required) 70 792028 Screw, 1/4-20 x 1/2" (Use as required) 71 26460 Clamp, Fuel l | 51 | 650695A | Screw, 5/16-18 x 2-1/4" (Use as requi red) |
| 51 650692 Screw, 5/16-18 x 1-3/4" (Use as required) 53 333636 Resistor Spark Plug (R)-48C) 53 34251 Resistor Spark Plug (R)-48C) 54 33035 Cover, Cylinder head 55 28377 Washer, Plain 57 650691 Washer, Plain 58 650690 Washer, Flat (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (Red Plastic) (Std.)(As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 712" 66 660451 Screw, 1/4-20 x 712" 67 650561 Screw, 1/4-20 x 712" 68 50683 Strap, Fuel tank 67 650561 Screw, 1/4-20 x 712" 68 650451 Screw, 1/4-20 x 712" 69 29063 Strap, Fuel tank 67 650561 Screw, 1/4-20 x 712" | 51 | 650714 | Screw, 5/16-18 x 1-5/8" (Use as requi red) |
| 51 650692 Screw, 5/16-18 x 1-3/4" (Use as require d) 53 33363 Resistor Spark Plug (RJ-17LM) 53 34251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover, Cylinder head 55 28537 Washer, Plain 57 650691 Washer, Flat (Use as required) 58 650500 Washer, Lock (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 91976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (Nethe Plastic)(Std.)(As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650451 Screw, 1/4-20 x 7/2" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 792028 Screw, 1/4-20 x 7/8" (Use as required) 708 29833 Strainer & Shut-off, Fuel 71 24600 Clarm, Fuel Ine (Braided) (625") (Use as required) 72 29774 Fuel Lin | 51 | 650697A | |
| 51 650603 Screw, 5/16-18 x 5/8" (Use as require d) 53 33636 Resistor Spark Plug (RJ-8C) 53 34251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover, Cylinder head 52 28537 Washer, Flat (Use as required) 56 650691 Washer, Flat (Use as required) 58 650690 Washer, Flat (Use as required) 58 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std.)(As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-look, 1/4-20 67 650517 Screw, 1/4-20 x 1" 67 650561 Screw, 5/16-18 x 7/8" (Use as required) 67 732028 Screw, 5/16-18 x 7/8" (Use as required) 70B 29683 Strainer & Shut-Off, Fuel 72 29774 Fuel Line (Braided) (32.5") (Use as required) 73 23259 Baffle, Blower ho | 51 | 650692 | |
| 53 33636 Resistor Spark Plug (RJ-8C) 53 34251 Resistor Spark Plug (RJ-17LM) 54 33035 Cover, Cylinder head 55 28537 Washer, Plain 57 650691 Washer, Flat (Use as required) 58 650690 Washer, Ebelleville (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 4210 Fuel Cap (White Plastic) (Std.) (As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 7/32" (Use as required) 67 50561 Screw, 1/4-20 x 5/3" (Use as required) 67 30063 Screw, 1/4-20 x 5/3" (Use as required) 67 792028 Screw, 5/16-18 X 7/8" (Use as required) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Braided) (| 51 | 650603 | Screw, 5/16-18 x 5/8" (Use as require d) |
| 53 34251 Resistor Spark Plug (RJ-17LM) 54 30355 Cover, Cylinder head 55 28537 Washer, Plain 57 650691 Washer, Flat (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std.)(As req uired) 63 34210 Fuel Cap (Red Plastic) (Sput resistant, High profile) (Use as required) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 6505611 Screw, 1/4-20 x 1/2" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 708 29683 Strainer & Shut-off, Fuel 71 2460 Clamp, Fuel line (Use as required) 72 30705 Fuel Line (Braided) (825") (Use as required) 72 30705 Fuel Line (Braided) (16") (Use as required) 72 | 53 | 33636 | |
| 54 33035 Cover, Cylinder head 55 28537 Washer, Flat (Use as required) 58 650690 Washer, Flat (Use as required) 58 8274 Washer, Flat (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (Red Plastic) (Stul.) (As req uired) 63 34210 Fuel Cap (Red Plastic) (Stul.) (As req uired) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650451 Screw, 1/4-20 x 1" 66 650451 Screw, 1/4-20 x 5/8" (Use as required) 67 63063 Screw, 1/4-20 x 1/2" (Use as required) 67 60063 Screw, 1/4-20 x 1/2" (Use as required) 67 70063 Screw, 5/16-18 x 7/8" (Use as required) 70 20663 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (825") (Use as required) 72 30705 | | | |
| 55 28537 Washer, Plain 57 650691 Washer, Flat (Use as required) 58 650690 Washer, Eld(Wille (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std.)(As req uired) 63 34210 Fuel Cap (Red Plastic) (Sput resistant, High profile) (Use as required) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650561 Screw, 1/4-20 x 27/32" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 708 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 30705 Fuel Line (Braided) (82.5") (Use as required) 72 30705 Fuel Line (Braided) (32.7) (Use as required) 72 30962 Fuel Line (Braided) (32.7) (Use as required) | | | |
| 57 650691 Washer, Flat (Use as required) 58 650690 Washer, Euck (Use as required) 58 8274 Washer, Lock (Use as required) 59 650128 Screw, 10-24 x 1/2" 60 31976 Extension, Blower housing 61 31978 Bracket, Fuel tank 63 410144B Fuel Cap (White Plastic)(Std.)(As req uired) 63 34210 Fuel Cap (Red Plastic) (Sput resistant, High profile) (Use as required) 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 27/32" (Use as required) 67 30063 Screw, 1/4-20 x 5/8" (Use as required) 708 29683 Strainer & Shut-off, Fuel 71 26400 Clamp, Fuel line (Braided) (8.25") (Use as required) 72 30705 Fuel Line (Braided) (82") (Use as required) 72 30962 Fuel Line (Braided) (48") (Use as required) 73 32579 Baffle, Blower housing 74 650611 Screw, 1/4-20 x 5/8" <t< td=""><td></td><td></td><td></td></t<> | | | |
| 58650690Washer, Belleville (Use as required)588274Washer, Lock (Use as required)59650128Screw, 10-24 x 1/2"6031976Extension, Blower housing6131978Bracket, Fuel tank63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 27/32" (Use as required)6730663Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 5/16-18 x 7/8" (Use as required)70829883Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Braided) (8.25") (Use as required)7229774Fuel Line (Braided) (16") (Use as required)7230962Fuel Line (Braided) (16") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Space, Steel (010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .00" up to .007" in which case no shim | | | |
| 588274Washer, Lock (Use as required)59650128Screw, 10-24 x 1/2"6031976Extension, Blower housing6131978Bracket, Fuel tank63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 5/8" (Use as required)6750561Screw, 1/4-20 x 5/8" (Use as required)67792028Screw, 1/4-20 x 5/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7230705Fuel Line (Braided) (8.25") (Use as required)7230962Fuel Line (Braided) (8.2") (Use as required)7332579Baffle, Blower housing7450561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .00" up to .007" in which case no shim | | | |
| 59650128Screw, 10-24 x 1/2"6031976Extension, Blower housing6131978Bracket, Fuel tank63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650561Screw, 1/4-20 x 27/32" (Use as required)6730063Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 1/4-20 x 5/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7230705Fuel Line (Braided) (8.25") (Use as required)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | | | |
| 6031976Extension, Blower housing6131978Bracket, Fuel tank63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 27/32" (Use as required)67650561Screw, 1/4-20 x 1/2" (Use as required)6730063Screw, 1/4-20 x 1/2" (Use as required)6730063Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as required)7230965Fuel Line (Braided) (32") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 6131978Bracket, Fuel tank63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 27/32" (Use as required)67650561Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 1/4-20 x 1/2" (Use as required)67792028Screw, 1/4-20 x 1/2" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7230705Fuel Line (Braided) (8.25") (Use as required)7230962Fuel Line (Braided) (16") (Use as required)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 63410144BFuel Cap (White Plastic)(Std.)(As req uired)6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650561Screw, 1/4-20 x 27/32" (Use as required)67650561Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 1/4-20 x 1/2" (Use as required)6730063Screw, 5/16-18 x 7/8" (Use as required)67792028Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7230705Fuel Line (Braided) (8.25") (Use as required)7230962Fuel Line (Braided) (32") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which case no shim | | | |
| 6334210Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 27/32" (Use as required)67650561Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 1/4-20 x 5/8" (Use as required)67792028Screw, 1/4-20 x 1/2" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7230705Fuel Line (Braided) (8.25") (Use as required)7230962Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | | | |
| required)6431979Strap, Fuel tank65650451Screw, 1/4-20 x 1"66650456Nut, Flange whiz-lock, 1/4-2067650517Screw, 1/4-20 x 27/32" (Use as required)67650561Screw, 1/4-20 x 5/8" (Use as required)6790063Screw, 1/4-20 x 1/2" (Use as required)67792028Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as required)7230705Fuel Line (Braided) (32") (Use as required)7230962Fuel Line (Braided) (48") (Use as required)7230965Fuel Line (Braided) (48") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gapbetween the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | | | |
| 64 31979 Strap, Fuel tank 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 27/32" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 5/16-18 x 7/8" (Use as required) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (8.25") (Use as required) 72 30705 Fuel Line (Braided) (16") (Use as required) 72 30962 Fuel Line (Braided) (16") (Use as required) 73 32579 Baffle, Blower housing 74 650561 Screw, 1/4-20 x 5/8" 78 31932 Bearing, Tapered roller 79 31928 Cup, Bearing 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | 63 | 34210 | |
| 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 27/32" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 1/4-20 x 1/2" (Use as required) 68 Strainer & Shut-off, Fuel (Use as required) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (8.25") (Use as required) 72 30705 Fuel Line (Braided) (32") (Use as required) 72 30962 Fuel Line (Braided) (48") (Use as required) 73 32579 Baffle, Blower housing 74 650561 Screw, 1/4-20 x 5/8" 78 31932 Bearing, Tapered roller 79 31928 Cup, Bearing 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | | | required) |
| 65 650451 Screw, 1/4-20 x 1" 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 27/32" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 1/4-20 x 1/2" (Use as required) 68 Strainer & Shut-off, Fuel (Use as required) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (8.25") (Use as required) 72 30705 Fuel Line (Braided) (32") (Use as required) 72 30962 Fuel Line (Braided) (48") (Use as required) 73 32579 Baffle, Blower housing 74 650561 Screw, 1/4-20 x 5/8" 78 31932 Bearing, Tapered roller 79 31928 Cup, Bearing 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim | 64 | 31979 | Strap, Fuel tank |
| 66 650456 Nut, Flange whiz-lock, 1/4-20 67 650517 Screw, 1/4-20 x 27/32" (Use as required) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 5/16-18 x 7/8" (Use as required) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (8.25") (Use as required) 72 30705 Fuel Line (Braided) (32") (Use as required) 72 30962 Fuel Line (Braided) (48") (Use as required) 73 32579 Baffle, Blower housing 74 650561 Screw, 1/4-20 x 5/8" 78 31932 Bearing, Tapered roller 79 31928 Cup, Bearing 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 67 650517 Screw, 1/4-20 x 27/32" (Use as require d) 67 650561 Screw, 1/4-20 x 5/8" (Use as required) 67 30063 Screw, 1/4-20 x 1/2" (Use as required) 67 792028 Screw, 5/16-18 x 7/8" (Use as require d) 70B 29683 Strainer & Shut-off, Fuel 71 26460 Clamp, Fuel line (Use as required) 72 29774 Fuel Line (Braided) (8.25") (Use as r equired) 72 30705 Fuel Line (Braided) (16") (Use as required) 72 30962 Fuel Line (Braided) (32") (Use as required) 73 32579 Baffle, Blower housing 74 650561 Screw, 1/4-20 x 5/8" 78 31932 Bearing, Tapered roller 79 31928 Cup, Bearing 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 67650561Screw, 1/4-20 x 5/8" (Use as required)6730063Screw, 1/4-20 x 1/2" (Use as required)67792028Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as required)7230705Fuel Line (Braided) (16") (Use as required)7230962Fuel Line (Braided) (32") (Use as required)7230965Fuel Line (Braided) (48") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 6730063Screw, 1/4-20 x 1/2" (Use as required)67792028Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as r equired)7230705Fuel Line (Braided) (16") (Use as required)7230962Fuel Line (Braided) (32") (Use as req uired)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 67792028Screw, 5/16-18 x 7/8" (Use as required)70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as r equired)7230705Fuel Line (Braided) (16") (Use as req uired)7230962Fuel Line (Braided) (32") (Use as req uired)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 70B29683Strainer & Shut-off, Fuel7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as required)7230705Fuel Line (Braided) (16") (Use as required)7230962Fuel Line (Braided) (32") (Use as required)7230965Fuel Line (Braided) (48") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7126460Clamp, Fuel line (Use as required)7229774Fuel Line (Braided) (8.25") (Use as r equired)7230705Fuel Line (Braided) (16") (Use as req uired)7230962Fuel Line (Braided) (32") (Use as req uired)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7229774Fuel Line (Braided) (8.25") (Use as required)7230705Fuel Line (Braided) (16") (Use as required)7230962Fuel Line (Braided) (32") (Use as required)7230965Fuel Line (Braided) (48") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7230705Fuel Line (Braided) (16") (Use as req uired)7230962Fuel Line (Braided) (32") (Use as req uired)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7230962Fuel Line (Braided) (32") (Use as req uired)7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7230965Fuel Line (Braided) (48") (Use as req uired)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7230965Fuel Line (Braided) (48") (Use as required)7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | 72 | 30962 | Fuel Line (Braided) (32") (Use as req uired) |
| 7332579Baffle, Blower housing74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | 72 | 30965 | Fuel Line (Braided) (48") (Use as req uired) |
| 74650561Screw, 1/4-20 x 5/8"7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | 73 | 32579 | |
| 7831932Bearing, Tapered roller7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 7931928Cup, Bearing8032031Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| 80 32031 Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim | | | |
| which can be from .001"up to .007" in which case no shim | 00 | | |
| | | | |
| | | | |
| gaskets will be required. Use of gasket must be limited to a | | | |
| combined total of .010" thick. Steel spacersmust be used | | | • |
| as required | | | as required |

| | Part Number 31971 | Qty Description * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
|---|---|--|
| | 32599 31972 | "O" Ring * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| 83 | 32577 | Cover, Cylinder NOTE: Determine the gap between the cove and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat |
| 84A 85 86 87 91 92 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 113 114 115 120 125A 128 128 128 | 792028 650679 650666 650594 33044A 8274 650595 8274 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 29752 650587 27272 650399 32009 650713 650713 650713 650399 32009 650713 650713 650429 792028 26073 | Screw, 5/16-18 x 7/8" Lockwasher, 5/16" (Use as required) Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Screw, 10-32 x 5/8" Cover, Air cleaner Screw, 5/16-18 x 3/4" (Use as required) Screw, 5/16-18 x 7/8" (Use as required) Washer, Cleaner as required) |
| 141A 145 147 151 156 | 20073 8274 31960 31959 33356 730201 610118 | Washer, Flat (Use as required) Lockwasher, Split (Use as required) * Gasket, Carburetor Baffle, Air Terminal, Ground Trigger Pin Kit (Use as required) Cover, Spark plug (Use as required) |

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| 176 | 31992 | Spacer, Screen |
| 177 | 8345 | Washer, 1/4 plain (Use as required) |
| 178 | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | Washer, Flat 1/4 (Use as required) |
| 187 | 650713 | Screw, 5/16-18 x 5/8" |
| 188 | 26073 | Washer, Flat |
| 246 | 33776 | Screen, Starter pulley |
| 247 | 31980 | Pulley, Starter |
| 248 | 650680 | Screw, 1/4-20 x 1-1/2" |
| 249 | 32046 | Rope Assy., Starter (Use as required) |
| 264 | 650661 | Screw, 1/4-20 x 3/4" |
| 265 | 610408 | Nut, Hex |
| 266 | 610750 | Grommet, Lead wire |
| 267 | 610748 | Solid State Magneto (Incl.151,173,265 ,266) |
| 278 | 610746 | Solid State Flywheel |
| 299B | 550223 | Decal, Name |
| 299B | 32676 | Decal, Solid State |
| 299 | 34346 | Decal, Instruction |
| 300 | 32255A | Valve, Seat, Spring & Gasket Assy. |
| 301 | 631533 | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 |
| | | for breakdown) |
| 304 | 33237A | * Gasket Set (Incl. items marked *) |

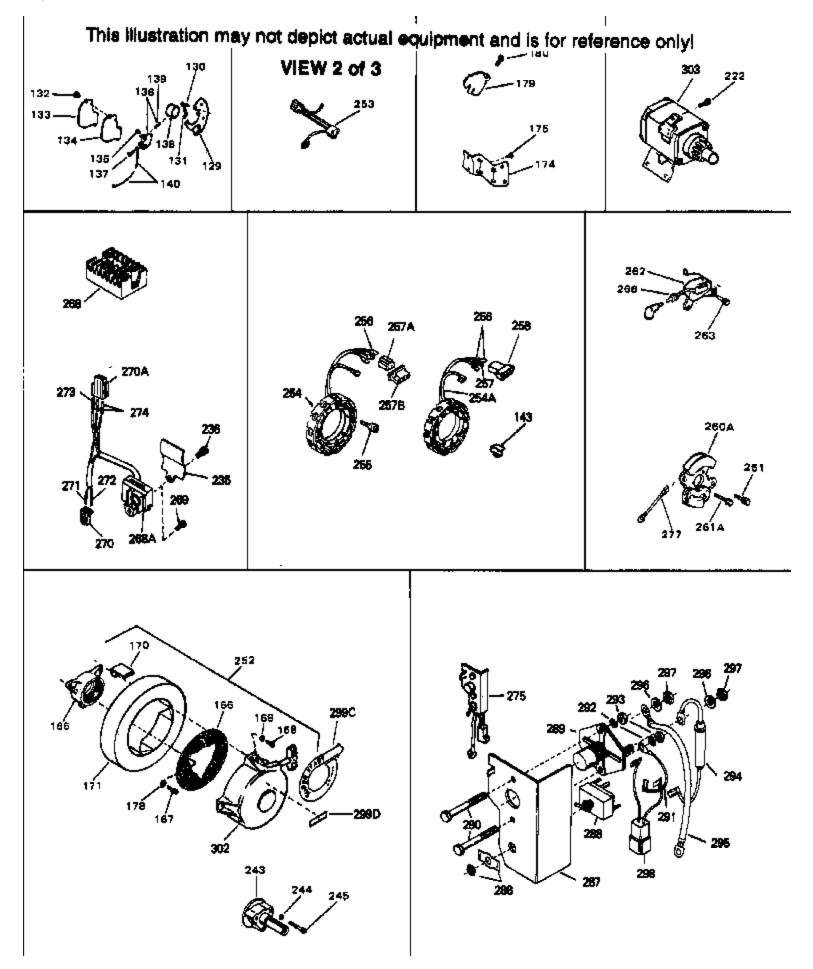


| Ref # | Part Number | Qty Description |
|-------|-------------|--|
| 178 | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | Washer, Flat 1/4 (Use as required) |
| 180 | 650701 | Screw, 8-18 x 7/16" (Use as required) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) |
| | 650781 | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) |
| 235 | 34276 | Plate, Cover (Use as required to cover regulator mounting hole in blower housing) |
| 236 | 650736 | Screw, 10-16 x 3/8" (Use as required) |
| 252 | 730134 | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required) |
| 253 | 33018 | Harness Assy., Adapter (Use as requir ed) |
| 254 | 610761 | Alternator Coil (Solid State) (10 Amp) (Incl. Nos. 253, 256 & 257A) |
| 255 | 650416 | Screw, 10-32 x 1" |
| | 610922 | Terminal, Female |
| 257B | 610824 | Flat Connector (Female terminals) (As req.) |
| 257A | 610819 | Connector, Pyramid (For female termin als) |
| | 610750 | Grommet, Lead wire |
| | 610749 | Solid State Regulator (10 Amp) |
| | 730198 | Starter Switch Kit(Incl. 287-298) (As req.) |
| 303 | 33835 | Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown. |

126A

124

Ĩ25

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

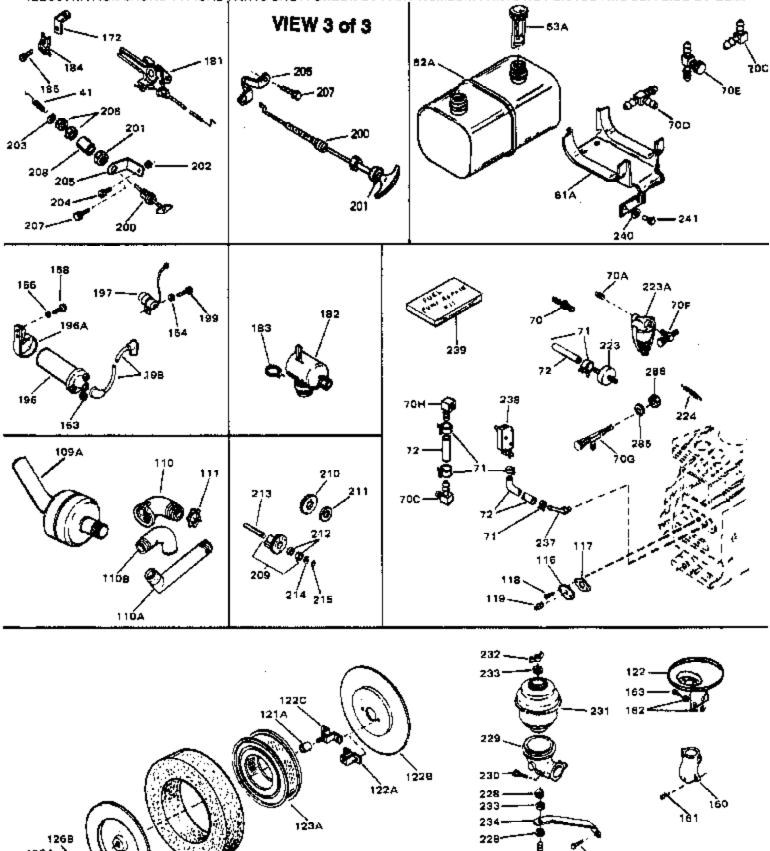

227-

234A

| Ref # | Part Number 0 | ty Description |
|-------|---------------|--|
| 41 | 31967 | Spring, Governor |
| 62A | 31977 | Fuel Tank (Incl. 63) |
| 70 | 29634 | Fitting, Fuel line |
| 71 | 26460 | Clamp, Fuel line (Use as required) |
| 72 | 29774 | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | Fuel Line (Braided) (16") (Use as req uired) |
| 72 | 30962 | Fuel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | Fuel Line (Braided) (48") (Use as req uired) |
| 119 | 28534 | Pipe Plug, 1/8-27 (Use as required) |
| 119 | 9556 | Plug, Pipe, 1/8-27 (Use as required) |
| 234 | 33104 | Brace, Air cleaner |