
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

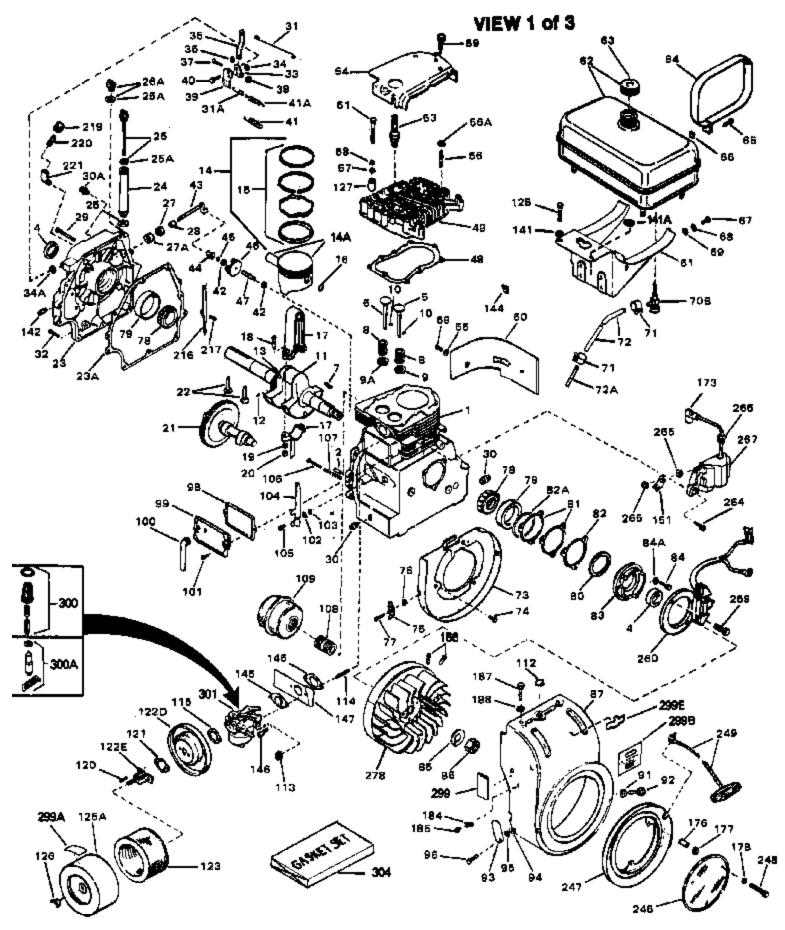


| Ref # | Part Number Qty | Description |
|-------|------------------|---|
| 1 | 33042 | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore) |
| 2 | 27652 | Pin, Dowel |
| 4 | 31950 | Seal, Oil |
| 5 | 31940 | Intake Valve (Std.) |
| 5 | 31941 | Intake Valve (1/32" OS) (Incl. 9) |
| 6 | 31942 | Exhaust Valve (Std.) |
| | 31943 | Exhaust Valve (1/32" OS) (Incl. 9) |
| | 650592 | Key, Flywheel |
| | 31944 | Spring, Valve |
| | 31945 | Cap, Lower valve spring (Std.) |
| | 31946 | Cap, Lower valve spring (1/32" OS) |
| | 31946 | Cap, Lower valve spring (1/32" OS) |
| | 31945 | Cap, Lower valve spring (Std.) |
| | 20810 | Pin, Valve spring retainer |
| | 33390B | Crankshaft (Incl. 12, 13, 78 & 79) |
| | 29783 | Pin, Crankshaft gear |
| | 31931 | Gear, Crankshaft |
| | 34511 | Piston, Pin & Ring Set (Std.) (3-1/2" Bore) |
| | 34512 | Piston, Pin & Ring Set (.010" OS) |
| | 34513 | Piston, Pin & Ring Set (.020" OS) |
| | 34524 | Piston, Pin & Ring Set (.030" OS) |
| | 34525 | Piston, Pin & Ring Set (.040" OS) |
| | 32238B | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") |
| | 32239B | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 32240B | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 32621B | Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
| | 32622B | Piston & Pin Ass'y. (.040" OS) (Incl. 16) |
| | 32241 | Ring Set (Std.) (3-1/2" Bore) |
| | 32241 | • |
| | 32242 | Ring Set (.010" OS) Ring Set (.020" OS) |
| | 32625 | • |
| | 32626 | Ring Set (.030" OS) Bing Set (.040" OS) |
| | | Ring Set (.040" OS) |
| | 32336 | Re-Ringing Set, Piston |
| | 31919 | Ring, Piston pin retaining |
| | 33093A | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20) |
| | 34383 | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) |
| | 34384 | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
| | 32077 | Bolt, Connecting rod |
| | 26073 | Washer, Connecting rod |
| | 28264 | Nut Assy., Lock |
| | 32150 | Camshaft (MCR) |
| | 31939 31956A | Lifter, Valve |
| | 31956A 32580A | * Gasket, Cylinder cover |
| | 29673 | Cover, Cylinder (Incl. 4, 28, 30, 34, & 43) * Gasket, Oil fill |
| | 29073 33069 | , |
| | | Dipstick (Incl. 25A) |
| | 32426 | Spacer, Governor rod |
| | 650588 | Screw, 1/4-20 x 2" Oil Droip Blug |
| | 31927 | Oil Drain Plug |
| | 31968 | Link, Governor |
| | 650451 21064 | Screw, 1/4-20 x 1" |
| | 31964 | Clamp, Governor lever |
| | 29193 | Ring, Retaining |
| | 31963 | Lever, Governor adjusting |
| | 650518 650544 | Lockwasher |
| | 650544 7075 | Screw, 10-24 x 7/8" |
| | 7975 | Nut, 10-24 |
| 39 | 31965 | Plate, Governor spring |

| | Part Number | Qty | |
|----|-------------|-----|---|
| 40 | 30312 | | Screw, 10-32 x 1/2" |
| 41 | 31967 | | Spring, Governor |
| 42 | 30590A | | Washer, Flat |
| | 32425 | | Rod Assy., Governor |
| | 31948 | | Spool, Governor |
| | 29193 | | Ring, Retaining |
| | 31947 | | Gear Assy., Governor |
| | 31930 | | Shaft, Mechanical Governor |
| | 32246A | | * Gasket, Cylinder head |
| | | | |
| | 33034 | | Head, Cylinder |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 650711 | | Screw, 5/16-18 x 1-5/8" (Use as required) |
| | 650628A | | Screw, 5/16-18 x 2-3/8" (Use as required) |
| | 650695A | | Screw, 5/16-18 x 2-1/4" (Use as requi red) |
| 51 | 650714 | | Screw, 5/16-18 x 1-5/8" (Use as requi red) |
| 51 | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as required) |
| 51 | 650692 | | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 650603 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 33636 | | Resistor Spark Plug (RJ-8C) |
| | 34251 | | Resistor Spark Plug (RJ-17LM) |
| | 33035 | | Cover, Cylinder head |
| | 28537 | | Washer, Plain |
| | 650691 | | |
| | | | Washer, Flat (Use as required) |
| | 650690 | | Washer, Belleville (Use as required) |
| | 8274 | | Washer, Lock (Use as required) |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 31976 | | Extension, Blower housing |
| | 31978 | | Bracket, Fuel tank |
| | 410144B | | Fuel Cap (White Plastic)(Std.)(As req uired) |
| 63 | 34210 | | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
| | | | required) |
| 64 | 31979 | | Strap, Fuel tank |
| 65 | 650451 | | Screw, 1/4-20 x 1" |
| 66 | 650456 | | Nut, Flange whiz-lock, 1/4-20 |
| 67 | 650517 | | Screw, 1/4-20 x 27/32" (Use as requir ed) |
| | 650561 | | Screw, 1/4-20 x 5/8" (Use as required) |
| | 30063 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 792028 | | Screw, 5/16-18 x 7/8" (Use as required) |
| | 29683 | | Strainer & Shut-off, Fuel |
| | 26460 | | Clamp, Fuel line (Use as required) |
| | | | |
| | 30705 | | Fuel Line (Braided) (16") (Use as required) |
| | 30962 | | Fuel Line (Braided) (32") (Use as req uired) |
| | 30965 | | Fuel Line (Braided) (48") (Use as req uired) |
| | 29774 | | Fuel Line (Braided) (8.25") (Use as r equired) |
| | 31975 | | Baffle, Blower housing |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| 75 | 33356 | | Terminal |
| | 28545 | | Grommet, Plastic |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 31932 | | Bearing, Tapered roller |
| | 31928 | | Cup, Bearing |
| 13 | 32031 | | |
| | JZUJ I | | Spacer, Steel (.010" thick) NOTE: Determine the gap |
| | | | |
| | | | between the cover and the machined surface on the cylinder |
| | | | which can be from .001"up to .007" in which case no shim |
| | | | which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a |
| | | | which can be from .001"up to .007" in which case no shim |


| | | Qty Description |
|--|---|---|
| 81 | 31971 | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| 82 | 31972 | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| | 32599 32677 | "O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat |
| 84 85 86 87 91 92 93 94 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 113 114 115 120 121 | 650679 650668 650594 33037 8274 650595 32039 650890 26073 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 29752 650587 27272 650399 30767 32378 | Lockwasher, 5/16" (Use as required) Screw, 10-32 x 1" Washer, Lock Nut, Flywheel, 3/4-16 Blower Housing Washer, Lock Screw, 5/16-24 x 3/8" Switch, Stop Washer, Shakeproof Washer, Shakeproof Washer, Flat Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Bracket, Air cleaner |
| 125A 126 128 128 128 128 | 32376 32009 650513 650713 650429 792028 26073 | Bracket, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 3/4" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Washer, Flat (Use as required) |

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| 141A | 8274 | Lockwasher, Split (Use as required) |
| 145 | 31960 | * Gasket, Carburetor |
| 147 | 31959 | Baffle, Air |
| 156 | 730201 | Trigger Pin Kit (Use as required) |
| 173 | 610118 | Cover, Spark plug (Use as required) |
| 177 | 8345 | Washer, 1/4 plain (Use as required) |
| 178 | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | Washer, Flat 1/4 (Use as required) |
| 184 | 27793 | Clip, Conduit |
| 185 | 28942 | Screw, 10-32 x 3/8" |
| 187 | 650713 | Screw, 5/16-18 x 5/8" |
| 188 | 26073 | Washer, Flat |
| 249 | 32046 | Rope Assy., Starter (Use as required) |
| 266 | 610750 | Grommet, Lead wire |
| 278 | 610758 | Flywheel |
| 299A | 31752 | Decal, Air cleaner |
| 299 | 34346 | Decal, Instruction |
| 299B | 550223 | Decal, Name |
| 299B | 32676 | Decal, Solid State |
| 300 | 32255A | Valve, Seat, Spring & Gasket Assy. |
| 301 | 631533 | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 |
| | | for breakdown) |
| 304 | 33237A | * Gasket Set (Incl. items marked *) |

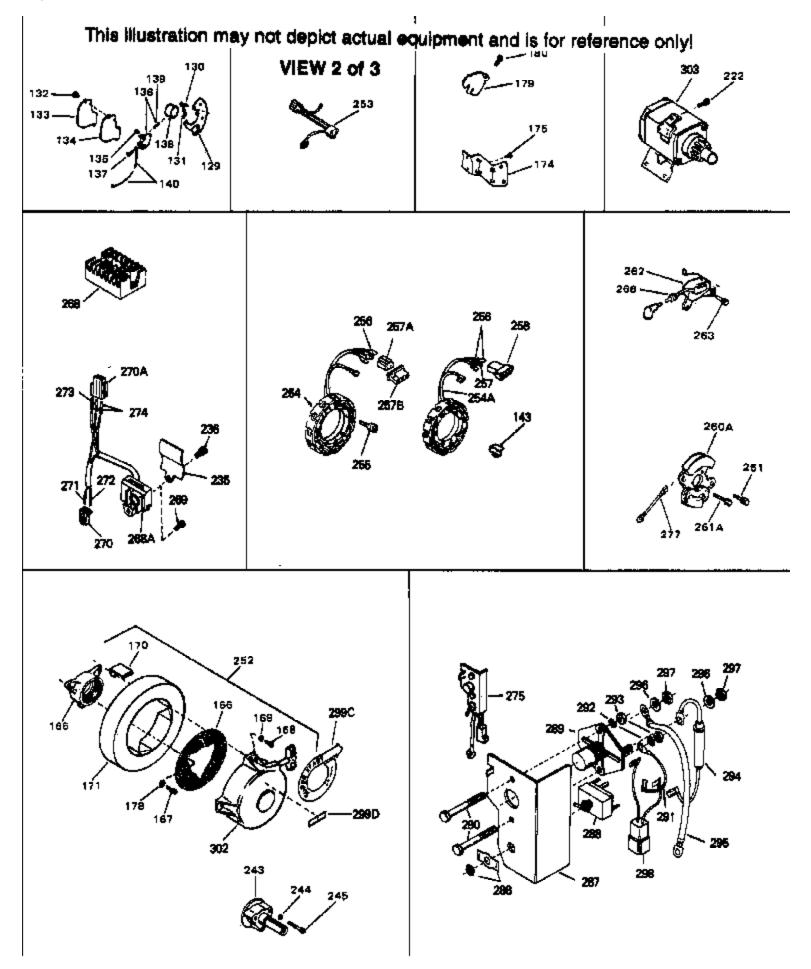

| 165 32 166 32 | 040 | |
|-------------------|-------|--|
| 166 .32 | 2048 | Hub, Starter |
| | 2049 | Screen, Starter hub |
| 167 65 | 50516 | Screw, 1/4-20 x 1-1/8" |
| 168 65 | 50598 | Screw, 1/4-28 x 3/4" |
| 169 83 | 345 | Washer, Flat |
| 178 27 | 7070 | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 65 | 50675 | Washer, Flat 1/4 (Use as required) |
| 180 65 | | Screw, 8-18 x 7/16" (Use as required) |
| 222 79 | | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) |
| 222 65 | | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) |
| 235 34 | | Plate, Cover (Use as required to cover regulator mounting |
| | | hole in blower housing) |
| 236 65 | 50736 | Screw, 10-16 x 3/8" (Use as required) |
| 252 73 | | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use |
| | | as required) |
| 050 00 | | . , |
| 253 33 | | Harness Assy., Adapter (Use as required) |
| 257B 61 | | Flat Connector (Female terminals) (As req.) |
| 260A 61 261 65 | | Solid State Magneto |
| 261 65 | | Screw, 1/4-20 x 5/8" |
| 267 65 | | Screw, 5/16-18 x 1-1/4" Solid State Transformer Acc's (Incl 1 72 266) |
| 263 65 | | Solid State Transformer Ass'y.(Incl.1 73,266) Screw, 1/4-20 x 5/8" |
| 263 65 | | Grommet, Lead wire |
| 200 01 | | Starter Switch Kit(Incl. 287-298) (As req.) |
| 275 73 | | Ground Wire (Incl. 75) |
| 302 59 | | Rewind Starter (Refer to Division 5, Section C, page 24 for |
| 302 39 | | breakdown) |

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

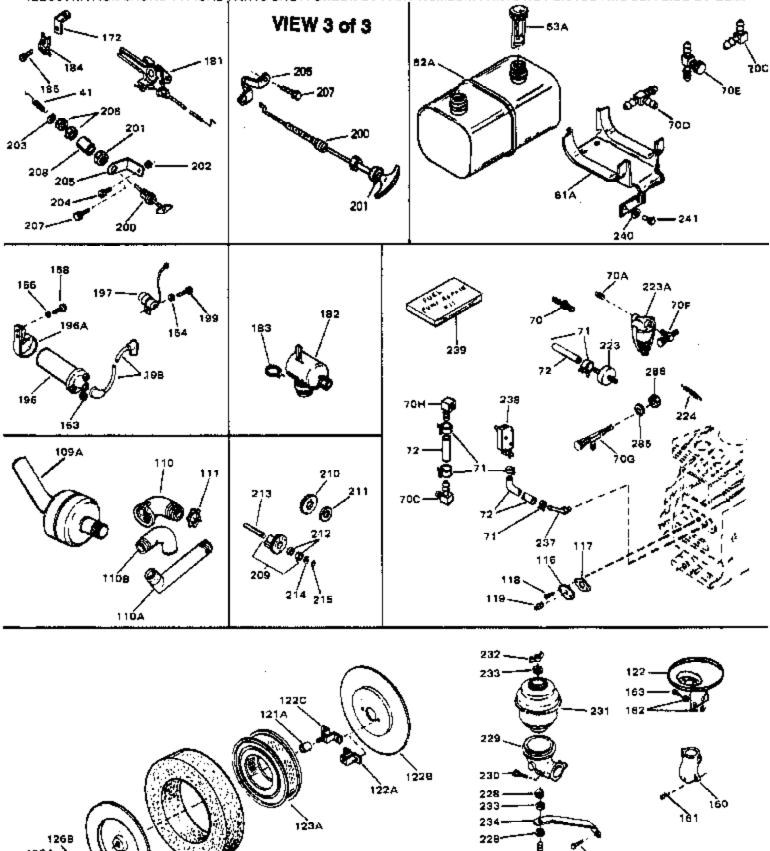

227-

234A



124

126A

| Ref # | Part Number G | Qty | Description |
|-------|---------------|-----|--|
| 41 | 31967 | | Spring, Governor |
| 62A | 31977 | | Fuel Tank (Incl. 63) |
| 70 | 29634 | | Fitting, Fuel line |
| 71 | 26460 | | Clamp, Fuel line (Use as required) |
| 72 | 30705 | | Fuel Line (Braided) (16") (Use as req uired) |
| 72 | 30962 | | Fuel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | | Fuel Line (Braided) (48") (Use as req uired) |
| 72 | 29774 | | Fuel Line (Braided) (8.25") (Use as r equired) |
| 119 | 28534 | | Pipe Plug, 1/8-27 (Use as required) |
| 119 | 9556 | | Plug, Pipe, 1/8-27 (Use as required) |
| 123A | 32008 | | Element, Air cleaner |
| 181 | 24522 | | Control, Throttle |
| 184 | 27793 | | Clip, Conduit |
| 185 | 28942 | | Screw, 10-32 x 3/8" |
| | | | |