
## ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

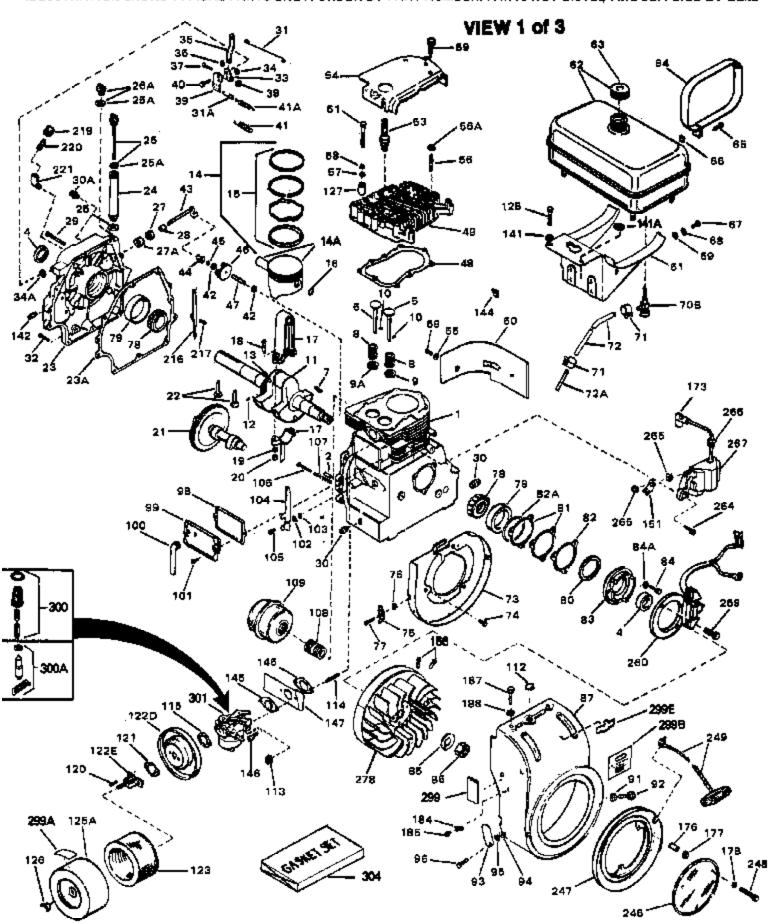


Ref #	Part Number Q	ty Description
	33042	Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)
	27652	Pin, Dowel
	31950	Seal, Oil
	31940	Intake Valve (Std.)
	31941	Intake Valve (3.32" OS) (Incl. 9)
	31942	· · · · · · · · · · · · · · · · · · ·
		Exhaust Valve (Std.)  Exhaust Valve (1/33" OS) (Incl. 0)
	31943	Exhaust Valve (1/32" OS) (Incl. 9)
	650592	Key, Flywheel
	31944	Spring, Valve
	31946	Cap, Lower valve spring (1/32" OS)
	31945	Cap, Lower valve spring (Std.)
	31945	Cap, Lower valve spring (Std.)
	31946	Cap, Lower valve spring (1/32" OS)
	20810	Pin, Valve spring retainer
	33390B	Crankshaft (Incl. 12, 13, 78 & 79)
	29783	Pin, Crankshaft gear
	31931	Gear, Crankshaft
	32238B	Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")
	32239B	Piston & Pin Ass'y. (.010" OS) (Incl. 16)
	32240B	Piston & Pin Ass'y. (.020" OS) (Incl. 16)
	32621B	Piston & Pin Ass'y. (.030" OS) (Incl. 16)
	32622B	Piston & Pin Ass'y. (.040" OS) (Incl. 16)
	34511	Piston, Pin & Ring Set (Std.) (3-1/2" Bore)
	34512	Piston, Pin & Ring Set (.010" OS)
	34513	Piston, Pin & Ring Set (.020" OS)
	34524	Piston, Pin & Ring Set (.030" OS)
	34525	Piston, Pin & Ring Set (.040" OS)
	32241	Ring Set (Std.) (3-1/2" Bore)
	32242	Ring Set (.010" OS)
	32243	Ring Set (.020" OS)
	32625	Ring Set (.030" OS)
	32626	Ring Set (.040" OS)
	32336	Re-Ringing Set, Piston
16	31919	Ring, Piston pin retaining
	33093A	Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
	34383	Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)
	34384	Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)
18	32077	Bolt, Connecting rod
19	26073	Washer, Connecting rod
20	28264	Nut Assy., Lock
21	32150	Camshaft (MCR)
22	31939	Lifter, Valve
23A	31956A	* Gasket, Cylinder cover
23	32580A	Cover, Cylinder (Incl. 4, 28, 30, 34, & 43)
25A	29673	* Gasket, Oil fill
26	33069	Dipstick (Incl. 25A)
28	32426	Spacer, Governor rod
29	650588	Screw, 1/4-20 x 2"
30	31927	Oil Drain Plug
31	31968	Link, Governor
32	650451	Screw, 1/4-20 x 1"
33	31964	Clamp, Governor lever
	29193	Ring, Retaining
35	31963	Lever, Governor adjusting
	650518	Lockwasher
	650544	Screw, 10-24 x 7/8"
	7975	Nut, 10-24
	31965	Plate, Governor spring


Ref #	Part Number Qty	Description
40	30312	Screw, 10-32 x 1/2"
	31967	Spring, Governor
	30590A	Washer, Flat
	32425	Rod Assy., Governor
	31948	Spool, Governor
	29193	Ring, Retaining
	31947	Gear Assy., Governor
	31930	Shaft, Mechanical Governor
	32246A	* Gasket, Cylinder head
	33034	Head, Cylinder
	650694A	
		Screw, 5/16-18 x 2" (Use as required)
	650711	Screw, 5/16-18 x 1-5/8" (Use as requi red)
	650628A	Screw, 5/16-18 x 2-3/8" (Use as requi red)
	650695A	Screw, 5/16-18 x 2-1/4" (Use as requi red)
	650714	Screw, 5/16-18 x 1-5/8" (Use as requi red)
	650697A	Screw, 5/16-18 x 2-1/2" (Use as requi red)
	650692	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650603	Screw, 5/16-18 x 5/8" (Use as require d)
	33636	Resistor Spark Plug (RJ-8C)
	34251	Resistor Spark Plug (RJ-17LM)
	33035	Cover, Cylinder head
55	28537	Washer, Plain
57	650691	Washer, Flat (Use as required)
58	650690	Washer, Belleville (Use as required)
58	8274	Washer, Lock (Use as required)
59	650128	Screw, 10-24 x 1/2"
60	31976	Extension, Blower housing
61	31978	Bracket, Fuel tank
63	410144B	Fuel Cap (White Plastic)(Std.)(As req uired)
	34210	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
		required)
0.4	04070	
	31979	Strap, Fuel tank
	650451	Screw, 1/4-20 x 1"
	650456	Nut, Flange whiz-lock, 1/4-20
	650517	Screw, 1/4-20 x 27/32" (Use as requir ed)
	650561	Screw, 1/4-20 x 5/8" (Use as required )
	30063	Screw, 1/4-20 x 1/2" (Use as required )
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	29683	Strainer & Shut-off, Fuel
	26460	Clamp, Fuel line (Use as required)
72	30705	Fuel Line (Braided) (16") (Use as req uired)
72	30962	Fuel Line (Braided) (32") (Use as req uired)
72	30965	Fuel Line (Braided) (48") (Use as req uired)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
73	32579	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	31932	Bearing, Tapered roller
	31928	Cup, Bearing
	32031	Spacer, Steel (.010" thick) NOTE: Determine the gap
00		between the cover and the machined surface on the cylinder
		which can be from .001"up to .007" in which case no shim
		gaskets will be required. Use of gasket must be limited to a
		combined total of .010" thick. Steel spacersmust be used
		·
		as required

and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat  84A 650679 84 792028 85 650666 86 650594 80 Washer, Lock 87 33044A 81 Blower Hsg. (Incl.73) (For electric s tarter) 87 33044A 88 Blower Hsg. (Incl.73) (For electric s tarter) 89 2 650595 80 Screw, 5/16-24 x 3/8" 80 650524 80 Screw, 5/16-24 x 3/8" 81 31958 81 "Gasket, Breather 81 31957 81 Breather Assy. 81 31957 81 Breather Assy. 81 31958 81 31958 81 31958 81 31958 81 31958 81 31958 81 31958 81 31958 81 31958 81 31957 81 Breather Assy. 81 31958 81 319	Dof #	Dort Number Ot	/ Description
**Gasket, Shirm (.005/.007 hick) NOTE: Determine the gap between the cover and the machined surface on the roylinder which can be from .001"up to .007" in which case no shirm gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req  83 32577 Cover, Cyfinder NOTE: Determine the gap between the cover and the machined surface on the cyfinder which can be from .001"up to .007" in which case no shirn gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat  84A 650679 Lockwasher, 5/16" (Use as required to eliminat  84A 650679 Lockwasher, 5/16" (Use as required)  84 792028 Screw, 5/16-18 x 7/8"  85 650666 Washer, Lock  86 650594 Nut, Flywheel, 3/4-16  87 33044A Blower Hsg. (Incl.73) (For electric starter)  91 8274 Washer, Lock  92 650395 Screw, 5/16-24 x 3/8"  93 31957 Washer, Lock  96 650624 Screw, 5/16-24 x 9/16"  97 31958 Gasket, Breather  97 31957 Breather Assy.  100 36350 Tube, Breather  101 650128 Screw, 10-24 x 1/2"  102 28558 Washer, Wave  103 31966 Lever, Control lever  104 31964 Lever, Control lever  105 120 30399 Spring  106 650597 Screw, 10-24 x 5/8"  107 33099 Spring  108 32042 Nipple, Exhaust pipe  117 30767 Spacer, Air cleaner  118 27727 "Gasket, Air cleaner  119 23376 Bracket, Air cleaner  120 650399 Screw, 10-24 x 5/8"  121 30767 Spacer, Air cleaner  122 32376 Bracket, Air cleaner  123 32376 Bracket, Air cleaner  124 650513 Screw, 5/16-18 x 5/8" (Use as require d)  125 850429 Screw, 5/16-18 x 5/8" (Use as require d)			* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
and the machined surface on the cylinder which can be from .001" up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat  84A 650679 Lockwasher, 5/16" (Use as required) 84 792028 Screw, 5/16-18 x 7/8" Screw, 5/16-18 x 7/8" Washer, Lock Washer, Lock Blower Hsg, (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 3/6" Screw, 10-24 x 1/2" Screw, 5/16-24 x 3/6" Screw, 10-24 x 1/2" Screw, 10-24 x 1/2" Screw, 10-24 x 5/6" Screw, 10-24 x 1/2" Screw, 10-			* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
84 792028 85 650066 86 650594 87 33044A 88 33044A 89 Blower Hsg. (Incl.73) (For electric s tarter) 88 33044A 89 Blower Hsg. (Incl.73) (For electric s tarter) 89 4274 89 8274 89 8274 89 831958 89 31957 89 31957 89 8278 89 31957 89 8278 80	83	32577	.001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to
126 792026 Sciew, 5/16-18 x 7/8 (Ose as require d) 141A 8274 Lockwasher, Split (Use as required) 141 26073 Washer, Flat (Use as required)	84 85 86 87 91 92 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 113 114 115 120 121 122E 122D 125A 128 128 128 128	792028 650666 650594 33044A 8274 650595 8274 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 29752 650587 27272 650399 30767 32376 32378 32009 650513 650713 650429 792028 8274	Screw, 5/16-18 x 7/8" Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 3/4" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Lockwasher, Split (Use as required)

Ref #	Part Number	Qty	Description
147	31959		Baffle, Air
151	610908		Terminal, Female
156	730201		Trigger Pin Kit (Use as required)
173	610118		Cover, Spark plug (Use as required)
176	31992		Spacer, Screen
177	8345		Washer, 1/4 plain (Use as required)
178	27070		Washer, Lock 1/4 E.T. (Use as require d)
178	650675		Washer, Flat 1/4 (Use as required)
184	27793		Clip, Conduit
185	28942		Screw, 10-32 x 3/8"
187	650713		Screw, 5/16-18 x 5/8"
188	26073		Washer, Flat
246	33776		Screen, Starter pulley
	31980		Pulley, Starter
	650680		Screw, 1/4-20 x 1-1/2"
	32046		Rope Assy., Starter (Use as required)
	650661		Screw, 1/4-20 x 3/4"
	610408		Nut, Hex
	610750		Grommet, Lead wire
	610906		Solid State Magneto (Incl.151,173,265,266)(20 Amp)
	610901		Solid State Flywheel
	31752		Decal, Air cleaner
	550223		Decal, Name
	32676		Decal, Solid State
	34346		Decal, Instruction
	32255A		Valve, Seat, Spring & Gasket Assy.
301	631533		Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 for breakdown)
304	33237A		* Gasket Set (Incl. items marked *)

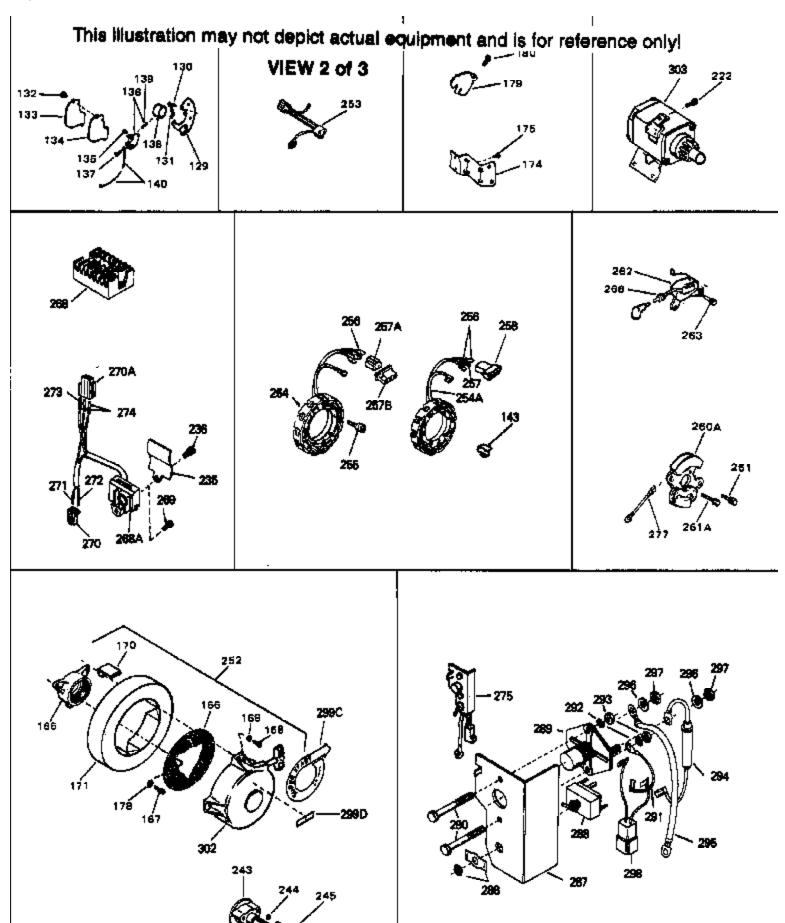

Ref #	Part Number	Otv	Description
178 178 180 222 222	27070 650675 650701 792028 650781 34276	<u> </u>	Washer, Lock 1/4 E.T. (Use as require d) Washer, Flat 1/4 (Use as required) Screw, 8-18 x 7/16" (Use as required) Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) Plate, Cover (Use as required to cover regulator mounting hole in blower housing)
	650736 730134		Screw, 10-16 x 3/8" (Use as required) Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)
254A 255 256 257B 257 258 266 268 275	33018 610902 650521 610905 610824 610904 610903 610750 610907A 730198 33835		Harness Assy., Adapter (Use as requir ed) Alternator Coil (20 Amp)(Incl.256,257,258) Screw, 10-32 x 1-1/8" Terminal Flat Connector (Female terminals) (As req.) Terminal Connector, Flat Grommet, Lead wire Regulator (20 Amp) (Incl.268A, 269 & 298) Starter Switch Kit(Incl. 287-298) (As req.) Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown.

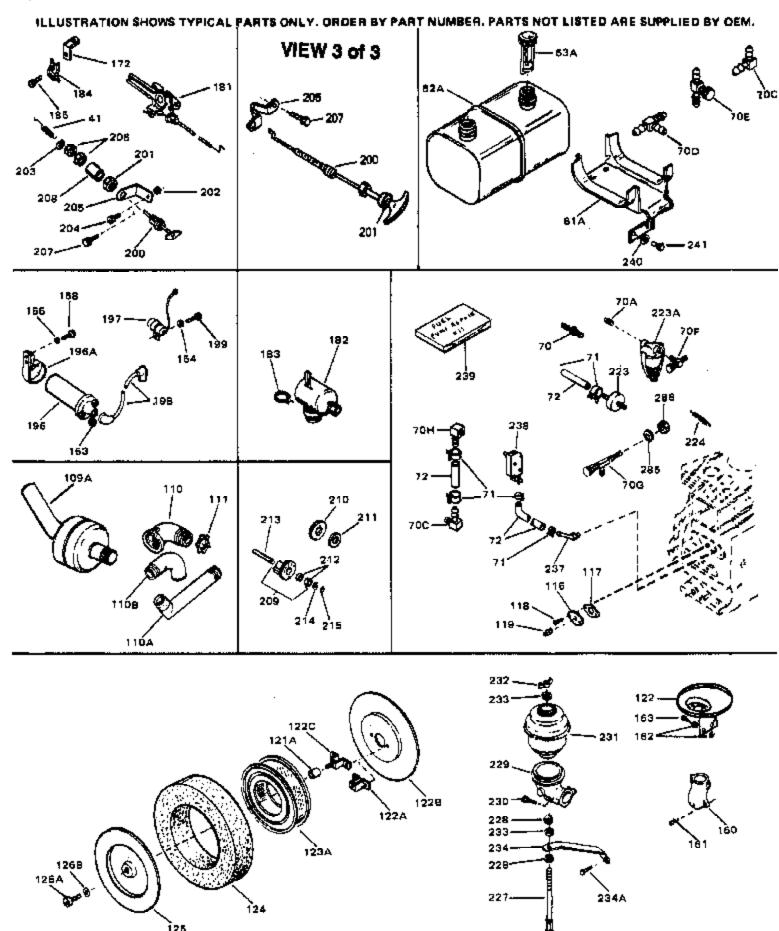

Ref #	Part Number (	Qty	Description
41	31967		Spring, Governor
62A	31977		Fuel Tank (Incl. 63)
70	29634		Fitting, Fuel line
71	26460		Clamp, Fuel line (Use as required)
72	30705		Fuel Line (Braided) (16") (Use as req uired)
72	30962		Fuel Line (Braided) (32") (Use as req uired)
72	30965		Fuel Line (Braided) (48") (Use as req uired)
72	29774		Fuel Line (Braided) (8.25") (Use as r equired)
119	28534		Pipe Plug, 1/8-27 (Use as required)
119	9556		Plug, Pipe, 1/8-27 (Use as required)
123A	32008		Element, Air cleaner
184	27793		Clip, Conduit
185	28942		Screw, 10-32 x 3/8"