
ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

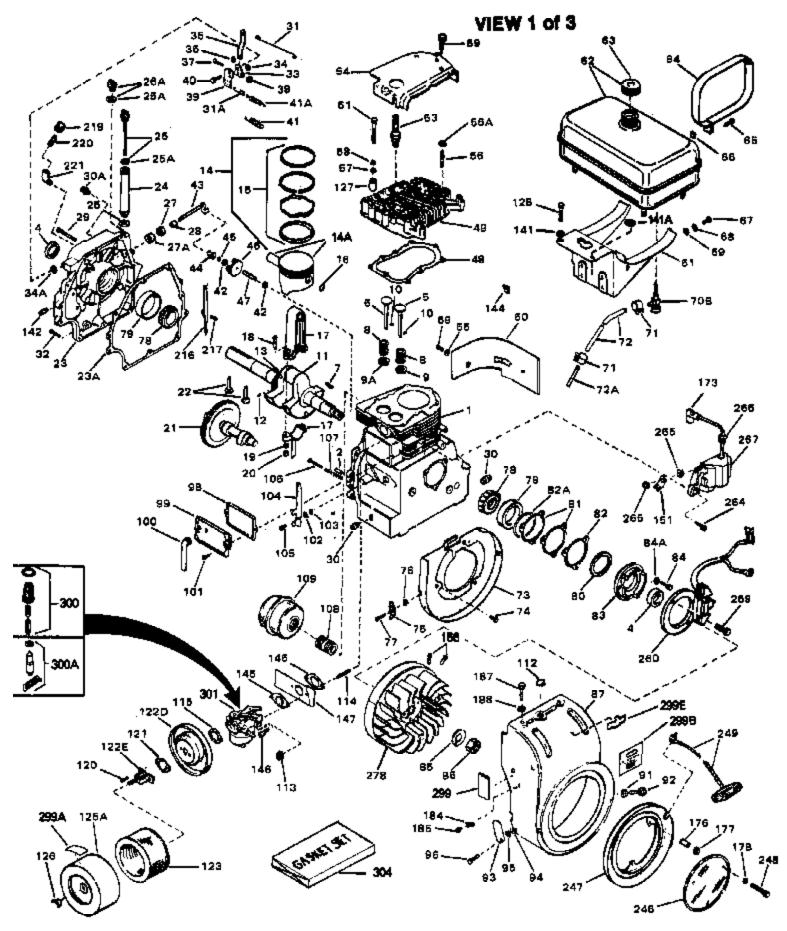


Ref # Part Number	Qty Description
1 33042	Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)
2 27652	Pin, Dowel
4 31950	Seal, Oil
5 31940	Intake Valve (Std.)
5 31941	Intake Valve (1/32" OS) (Incl. 9)
6 31942	Exhaust Valve (Std.)
6 31943	Exhaust Valve (1/32" OS) (Incl. 9)
7 650592	Key, Flywheel
8 31944	Spring, Valve
9A 32475	Cap, Lower valve spring (Rotator)
9 31946	Cap, Lower valve spring (1/32" OS)
9 31945	Cap, Lower valve spring (Std.)
10 20810	Pin, Valve spring retainer
11 33393A	Crankshaft (Incl. 12, 13, 78 & 79)
12 29783	Pin, Crankshaft gear
13 31931	Gear, Crankshaft
14 34511	Piston, Pin & Ring Set (Std.) (3-1/2" Bore)
14 34512	Piston, Pin & Ring Set (.010" OS)
14 34513	Piston, Pin & Ring Set (.020" OS)
14 34524	Piston, Pin & Ring Set (.020 OS) Piston, Pin & Ring Set (.030" OS)
14 34525	Piston, Pin & Ring Set (.040" OS)
14 34323 14A 32238B	
14A 32230B 14A 32239B	Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") Piston & Pin Ass'y. (010" OS) (Incl. 16)
	Piston & Pin Ass'y. (.010" OS) (Incl. 16)
14A 32240B	Piston & Pin Ass'y. (.020" OS) (Incl. 16)
14A 32621B	Piston & Pin Ass'y. (.030" OS) (Incl. 16)
14A 32622B	Piston & Pin Ass'y. (.040" OS) (Incl. 16)
15 32241	Ring Set (Std.) (3-1/2" Bore)
15 32242	Ring Set (.010" OS)
15 32243	Ring Set (.020" OS)
15 32625	Ring Set (.030" OS)
15 32626	Ring Set (.040" OS)
15 32336	Re-Ringing Set, Piston
16 31919	Ring, Piston pin retaining
17 33093A	Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
17 34383	Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)
17 34384	Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)
18 32077	Bolt, Connecting rod
19 26073	Washer, Connecting rod
20 28264	Nut Assy., Lock
21 32150	Camshaft (MCR)
22 31939	Lifter, Valve
23 32580A	Cover, Cylinder (Incl. 4, 28, 30, 34, & 43)
23A 31956A	* Gasket, Cylinder cover
24 33992A	Oil Fill Tube
25A 33590	"O" Ring
26 33993A	Dipstick (Incl. 25A)
28 32426	Spacer, Governor rod
29 650588	Screw, 1/4-20 x 2"
30 31927	Oil Drain Plug
31 31968	Link, Governor
32 650451	Screw, 1/4-20 x 1"
33 31964	Clamp, Governor lever
34 29193	Ring, Retaining
35 31963	Lever, Governor adjusting
36 650518	Lockwasher
37 650544	Screw, 10-24 x 7/8"
38 7975	Nut, 10-24
39 31965	Plate, Governor spring
03 01000	rido, obverior spring

	Screw, 10-32 x 1/2"
:	
	Spring, Governor
	Washer, Flat
	Rod Assy., Governor
	Spool, Governor
	•
	Ring, Retaining
	Gear Assy., Governor
	Shaft, Mechanical Governor
	* Gasket, Cylinder head
	Head, Cylinder
	Screw, 5/16-18 x 2" (Use as required)
	Screw, 5/16-18 x 1-5/8" (Use as required)
	Screw, 5/16-18 x 2-3/8" (Use as requi red)
	Screw, 5/16-18 x 2-1/4" (Use as required)
	Screw, 5/16-18 x 1-5/8" (Use as required)
	Screw, 5/16-18 x 2-1/2" (Use as required)
	Screw, 5/16-18 x 1-3/4" (Use as required)
	Screw, 5/16-18 x 5/8" (Use as require d)
	Resistor Spark Plug (RJ-8C)
	Resistor Spark Plug (RJ-17LM)
	Cover, Cylinder head
	Washer, Plain
	Washer, Flat (Use as required)
	Washer, Belleville (Use as required)
	Washer, Lock (Use as required)
	Screw, 10-24 x 1/2"
	Extension, Blower housing
	Bracket, Fuel tank
	Fuel Cap (White Plastic)(Std.)(As req uired)
	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
	required)
	Strap, Fuel tank
	Screw, 1/4-20 x 1"
	Nut, Flange whiz-lock, 1/4-20
	Screw, 1/4-20 x 27/32" (Use as required)
	Screw, 1/4-20 x 5/8" (Use as required)
	Screw, 1/4-20 x 1/2" (Use as required)
:	Screw, 5/16-18 x 7/8" (Use as require d)
:	Strainer & Shut-off, Fuel
	Clamp, Fuel line (Úse as required)
	Fuel Line (Braided) (32") (Use as req uired)
	Fuel Line (Braided) (48") (Use as req uired)
	Fuel Line (Braided) (8.25") (Use as required)
	Fuel Line (Braided) (16") (Use as req uired)
	Baffle, Blower housing
:	Screw, 1/4-20 x 5/8"
-	Terminal
	Grommet, Plastic
	Screw, 8-32 x 3/8"
	Bearing, Tapered roller
	Spacer, Steel (.010" thick) NOTE: Determine the gap
	between the cover and the machined surface on the cylinder
,	which can be from .001"up to .007" in which case no shim
(gaskets will be required. Use of dasket must be limited to a
	gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used

		Qty Description
81	31971	* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
	32599 31972	"O" Ring * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req
83	32677	Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat
84A 85 86 87 91 92 93 94 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 115 120 121 125A 126 128 128	650668 650594 33037 8274 650595 32039 650890 26073 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 27272 650399 30767 32810 650513 650713 650429 792028	Screw, 10-32 x 1" Lockwasher, 5/16" (Use as required) Washer, Lock Nut, Flywheel, 3/4-16 Blower Housing Washer, Lock Screw, 5/16-24 x 3/8" Switch, Stop Washer, Shakeproof Washer, Shakeproof Washer, Flat Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d)
141A 145 146	26073 8274 33263 650451 34061	Washer, Flat (Use as required) Lockwasher, Split (Use as required) * Gasket, Carburetor Screw, 1/4-20 x 1" Baffle, Air

Dof #	Port Number Of	v. Description
	Part Number Qt	
	730201	Trigger Pin Kit (Use as required)
	610118	Cover, Spark plug (Use as required)
	31992	Spacer, Screen
177	8345	Washer, 1/4 plain (Use as required)
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
184	27793	Clip, Conduit
185	28942	Screw, 10-32 x 3/8"
187	650713	Screw, 5/16-18 x 5/8"
188	26073	Washer, Flat
246	33776	Screen, Starter pulley
247	31980	Pulley, Starter
	650680	Screw, 1/4-20 x 1-1/2"
	32046	Rope Assy., Starter (Use as required)
	610750	Grommet, Lead wire
	610758	Flywheel
	34346	Decal, Instruction
	31752	Decal, Air cleaner
	550223	Decal, Name
	32676	Decal, Solid State
	631021	Inlet Needle, Seat & Clip Assy.
	631877	Carburetor (Incl. 145) (Refer to Division 5, Section A, page
001		134 for breakdown)
304	33237A	* Gasket Set (Incl. items marked *)

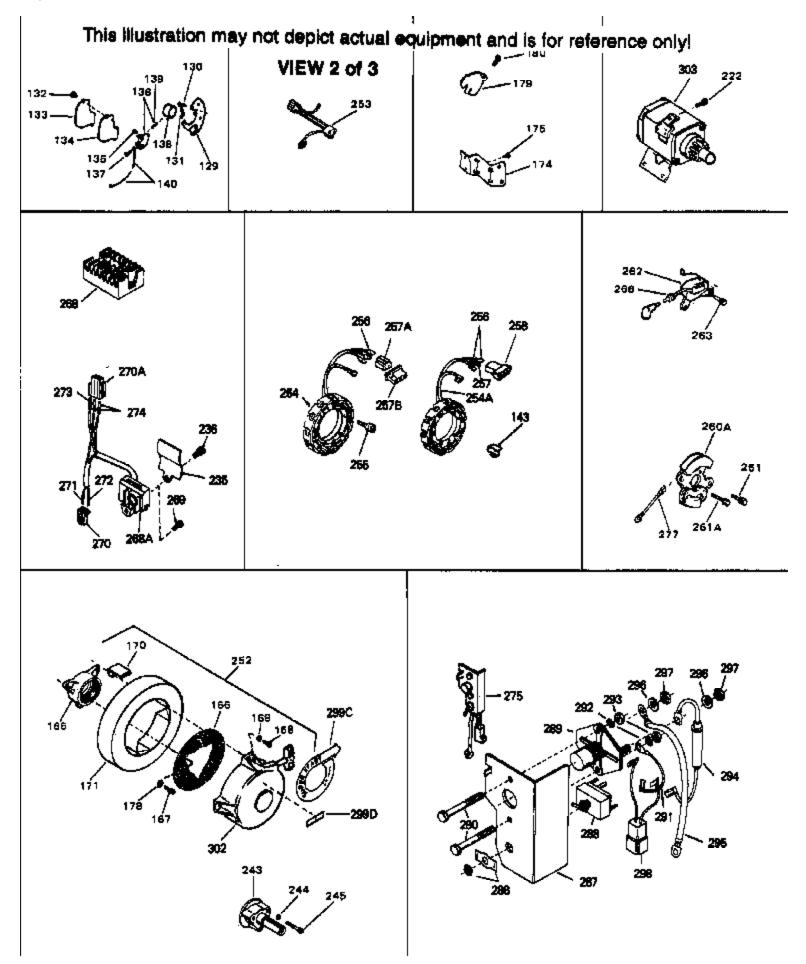

Ref #	Part Number C	ty Description
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
180	650701	Screw, 8-18 x 7/16" (Use as required)
222	792028	Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)
222	650781	Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)
235	34276	Plate, Cover (Use as required to cover regulator mounting hole in blower housing)
236	650736	Screw, 10-16 x 3/8" (Use as required)
252	730134	Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)
253	33018	Harness Assy., Adapter (Use as requir ed)
257B	610824	Flat Connector (Female terminals) (As req.)
260A	610759	Solid State Magneto
261	650489	Screw, 1/4-20 x 5/8"
261A	650669	Screw, 5/16-18 x 1-1/4"
262	610760	Solid State Transformer Ass'y.(Incl.1 73,266)
263	650561	Screw, 1/4-20 x 5/8"
266	610750	Grommet, Lead wire
275	730198	Starter Switch Kit(Incl. 287-298) (As req.)
277	30831	Ground Wire (Incl. 75)

1268


126A

Ć

Ĩ25

124

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

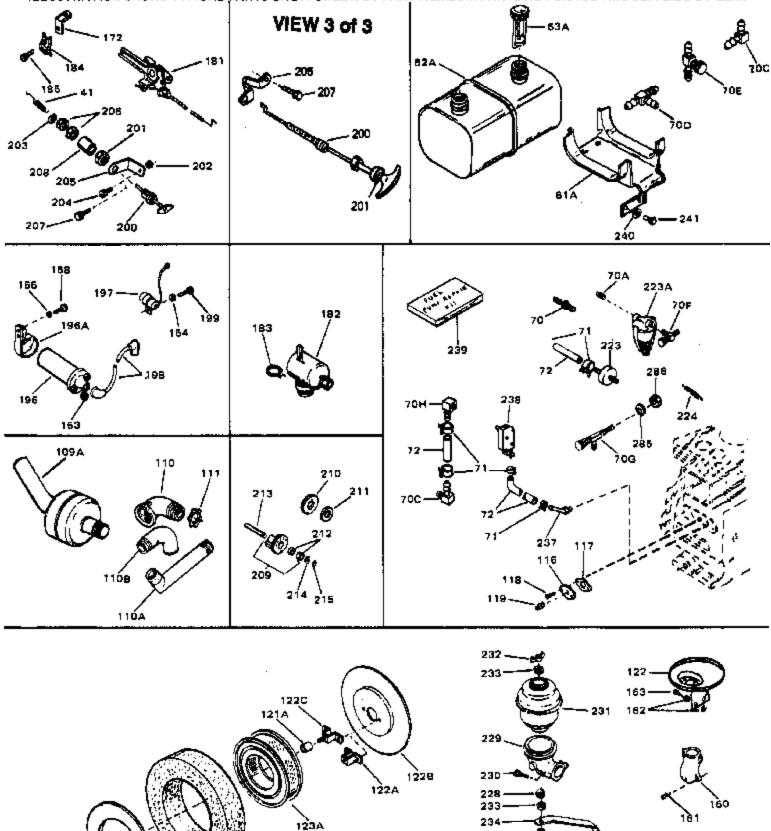

228

227-

234A

Ref #	Part Number Qt	y Description
	31967	Spring, Governor
62A	31977	Fuel Tank (Incl. 63)
71	26460	Clamp, Fuel line (Use as required)
72	30962	Fuel Line (Braided) (32") (Use as req uired)
72	30965	Fuel Line (Braided) (48") (Use as req uired)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
72	30705	Fuel Line (Braided) (16") (Use as req uired)
119	28534	Pipe Plug, 1/8-27 (Use as required)
119	9556	Plug, Pipe, 1/8-27 (Use as required)
122C	32907B	Bracket, Air cleaner
122B	34065	Bracket, Air cleaner
123A	32008	Element, Air cleaner
184	27793	Clip, Conduit
185	28942	Screw, 10-32 x 3/8"