


|                |         | Qty |  |
|----------------|---------|-----|--|
| 1              | 32769B  |     | Cylinder (Incl. 2, 3, 4, 76 & 270) (2 -3/4")                                     |
| 2              | 27652   |     | Pin, Dowel   |
|                | 27642   |     | Plug, Oil drain  |
|                | 32630   |     | Seal, Oil  |
|                | 32783   |     | Intake Valve (Std.) (Incl. 9)  |
|                |         |     |  |
|                | 32784   |     | Intake Valve (1/32" OS) (Incl. 9)  |
|                | 27878A  |     | Exhaust Valve (Std.) (Incl. 9)   |
|                | 27880A  |     | Exhaust Valve (1/32" OS) (Incl. 9)   |
| 7              | 27882   |     | Cap, Upper valve spring  |
| 7A             | 20810   |     | Pin, Valve spring retainer (Use as re quired)                                    |
| 8A             | 27881   |     | Spring, Valve  |
|                | 27881   |     | Spring, Valve  |
|                | 32581   |     | Cap, Lower valve spring  |
|                | 32581   |     |  |
|                |         |     | Cap, Lower valve spring  |
| 10A            | 32590   |     | Plate, Lock & Oil dipper (This plate may be replaced by                          |
|                |         |     | 34242 oil dipper but 650662C screw must be used.)                                |
| 10             | 34242   |     | Dipper, Oil  |
|                | 32774   |     | ••   |
|                |         |     | Crankshaft (Incl. 12 & 13)   |
|                | 29783   |     | Crankshaft Gear Pin (Early production)   |
| 13             | 27884   |     | Gear, Crankshaft (Used in early production) This gear is                         |
|                |         |     | servicable onlywhen it is pinned to the crankshaft.                              |
| 1/             | 34528   |     | Piston, Pin & Ring Set (Std.) (2-3/4" Bore)                                      |
|                |         |     |  |
|                | 34529   |     | Piston, Pin & Ring Set (.010" OS)  |
|                | 34530   |     | Piston, Pin & Ring Set (.020" OS)  |
|                | 32770B  |     | Piston & Pin Ass'y. (Std.)(2-3/4")(In cl.16)                                     |
| 14A            | 32771B  |     | Piston & Pin Ass'y. (.010" OS) (Incl. 16)  |
| 14A            | 32772B  |     | Piston & Pin Ass'y. (.020" OS) (Incl. 16)  |
| 15             | 32595   |     | Ring Set (Std.) (2-3/4" Bore)  |
| 15             | 32596   |     | Ring Set (.010" OS)  |
|                | 32597   |     | Ring Set (.020" OS)  |
|                | 27888   |     | Ring, Piston pin retaining   |
|                |         |     | <b>0</b>   |
|                | 32591C  |     | Rod Assy., Connecting (Incl. 10 & 18)  |
|                | 650662C |     | Screw, Connecting rod (2 each)   |
|                | 32115   |     | Camshaft (MCR)   |
| 22             | 34034   |     | Lifter, Valve  |
| 23             | 31451A  |     | Cylinder Cover (Incl.24, 106, 309, 31 0 & 311)                                   |
| 24B            | 31546   |     | Bushing, Crankshaft (Use as required)  |
|                | 28460   |     | Seal, Oil  |
|                | 31297   |     | Dipstick, Oil (Incl. 30)   |
|                | 30684   |     | * Gasket, Cylinder cover   |
|                |         |     |  |
|                | 650451  |     | Screw, 1/4-20 x 1"   |
|                | 29673   |     | * Gasket, Oil filler   |
|                | 650489  |     | Screw, 1/4-20 x 5/8"   |
|                | 32631A  |     | * Gasket, Cylinder head  |
| 33             | 30938A  |     | Head, Cylinder   |
|                | 27793   |     | Clip, Conduit (Use as required)  |
|                | 28942   |     | Screw, 10-32 x 3/8" (Use as required)  |
|                | 650697A |     | Screw, 5/16-18 x 2-1/2" (Use as required)  |
|                |         |     |  |
|                | 650695A |     | Screw, 5/16-18 x 2-1/4" (Use as required)  |
|                | 650694A |     | Screw, 5/16-18 x 2" (Use as required)  |
|                | 33636   |     | Resistor Spark Plug (RJ-8C)  |
| 37             | 34251   |     | Resistor Spark Plug  |
|                | 27896A  |     | * Gasket, Breather cover   |
|                | 28423   |     | Body, Breather   |
|                |         |     |  |
| 39             |         |     | Flement Breather   |
| 39<br>40       | 28424   |     | Element, Breather  |
| 39<br>40<br>41 |         |     | Element, Breather<br>Cover, Valve spring<br>Washer, Belleville (Use as required) |

|   | Part Number   | Qty Description   |
|---|---|---|
| 42<br>43<br>45  | 26073<br>650691<br>650128<br>27915A   | Washer (Use as required)<br>Washer, Flat (Use as required)<br>Screw, 10-24 x 1/2"<br>* Gasket, Intake   |
| 47<br>50  | 30195A<br>30196<br>650548<br>32326A   | Flange, Carburetor (Incl. 79 & 80)<br>Screw, 5/16-18 x 3/4"<br>Screw, 8-32 x 5/16"<br>Lever, Governor (New lever does not need 1 of<br>51,66,132,164,165,207)   |
| 56<br>59<br>60<br>61<br>62  | 30205<br>31710<br>29216<br>650152<br>29826<br>29642<br>30699B   | Bracket, Adjusting<br>Link, Throttle<br>Nut, Lock, 10-32<br>Screw, 8-32 x 3/8"<br>Screw, 10-32 x 3/4"<br>Ring, Retaining<br>Governor Rod Ass'y. (This one-piece governor rodis no longer<br>used. It is replaced by 30699C ass'y.,Ref. no. 63A)   |
| 64<br>65<br>66<br>67<br>69<br>70<br>71<br>72                                  | 30699C<br>30700<br>650494<br>29918<br>35350<br>29747B<br>32158E<br>650815<br>8116<br>29536                                      | Rod Assy., Governor (Incl. 64 & 65)<br>Yoke, Governor<br>Screw, 6-40 x 5/16"<br>Lockwasher, #8 E.T.<br>Tube, Breather<br>Screw, 5/16-24 x 21/32"<br>Blower Housing (For elec.star.)(Incl. 134,135)<br>Washer, Belleville<br>Nut, Hex<br>Blower Housing Baffle (without electric starter knock-out)<br>(Use as required)   |
| 73  | 35256A  | Blower Housing Baffle (with electric starter knock-out) (Use as required) (Point Ignition)  |
| 75<br>79<br>80  | 650561<br>31688A<br>29752<br>650572<br>730164   | Screw, 1/4-20 x 5/8"<br>* Gasket, Carburetor<br>Nut & Lockwasher Assy., 1/4-28<br>Screw, 1/4-28 x 1-1/8"<br>Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89, 90A & 331B)<br>(Use as required)  |
|   | 27272A<br>31691   | * Gasket, Air cleaner<br>Bracket, Air cleaner NOTE: 130010 thru 10C & 11 used in<br>early production only.  |
| 90<br>98<br>99<br>100<br>106<br>107<br>108<br>109<br>110<br>113<br>114<br>115 | 28820<br>31715<br>28569<br>29500<br>29538<br>31845<br>30591<br>30588A<br>30590A<br>29193<br>650561<br>31301<br>410144B<br>33032 | Screw, 10-32 x 1/2"<br>Body, Air cleaner<br>Spring, Compression<br>Screw, 8-32 x 3/4"<br>Base, Engine mounting<br>Shaft, Mechanical governor<br>Gear Assy., Governor (Incl. 109)<br>Spool, Governor<br>Washer, Flat<br>Ring, Retaining<br>Screw, 1/4-20 x 5/8"<br>Fuel Tank (Incl. 115)<br>Fuel Cap (White Plastic)(Std)(As requ ired)<br>Fuel Cap (Charcoal Plastic) (Spurt resistant, Low profile)<br>(Use as required) |

|     |                 | ty Description  |
|-----|-----------------|---|
| 115 | 34210           | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)  |
| 115 | 35355           | Fuel Cap (Use as required)  |
|     | 28584           | Fitting, Fuel strainer & elbów  |
|     | 29774           | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.)   |
|     | 30705           | Fuel Line (Braided 16") (41 cm) (Use as req.)   |
|     | 30962           | Fuel Line (Braided 32") (81 cm) (Use as req.)   |
|     | 650128          | Screw, 10-24 x 1/2" (Use as required)   |
|     | 30622A          | Extension, Blower housing   |
|     | 650542          | Screw, 5/16-18 x 3/4"   |
|     | 26073           | Washer (Use as required)  |
|     | 650694A         | Screw, 5/16-18 x 2" (Use as required)   |
|     | 32589           | Key, Flywheel   |
|     | 31843A          | Bracket, Governor gear  |
|     | 650836          | Screw, 10-24 x 1/2"   |
|     | 650599          | Screw, 1/4-20 x 1-1/2"  |
|     | 30747           | Clip, Shorting  |
|     | 650890          | Lockwasher  |
|     | 610118          | Cover, Spark plug (Use as required)   |
|     | 27276           | Cover, Spark plug   |
|     | 650561          | Screw, 1/4-20 x 5/8" (Use as required )   |
|     | 30939A          | Cover, Cylinder head  |
|     | 26460           | Clamp, Fuel line  |
|     | 31461           | Bushing, Crankshaft (Use as required)   |
|     | 31726B          | Control Bracket (Incl. 98, 99, 214 & 274)   |
|     | 610973          | Terminal Ass'y. (As req. on late prod uction)   |
|     | 34043           |   |
|     | 27275           | Spring, Control lever   |
|     |                 | Clip, Hi-tension wire (Use as require d)  |
|     | 34246           | Clip, Ground wire (Use as required)   |
|     | 650625          | Washer, Thrust  |
|     | 34346<br>550223 | Decal, Instruction  |
|     |                 | Decal, Name   |
|     | 30547A          | Contact Assy., Breaker  |
|     | 30548B          | Condenser   |
|     | 631021          | Inlet Needle, Seat & Clip Assy.   |
| 330 | 631453          | Carburetor (Incl. 75) (Refer to Division 5, Section A, page 100 for breakdown)  |
| 337 | 610689A         | Magneto NOTE: The complete magneto is not available as<br>an assembly. The magneto number is shown for reference<br>purposes only. Order component parts individually, as show<br>in parts list. (Refer to Division 5, Section B, page 24 for<br>breakdown) |
| 343 | 33239A          | Gasket Set (Incl. items marked*)  |
| 0-0 |                 |   |



| Ref # | Part Number Qty | Description   |
|-------|-----------------|---|
|       | 650489          | Screw, 1/4-20 x 5/8"  |
|       | 27793           | Clip, Conduit (Use as required)                               |
|       | 28942           | Screw, 10-32 x 3/8" (Use as required)                         |
|       | 650128          | Screw, 10-24 x 1/2"   |
|       | 31710           | Link, Throttle  |
|       | 650815          | Washer, Belleville  |
|       | 8116            | Nut, Hex  |
|       | 28569           | Spring, Compression   |
|       | 29500           | Screw, 8-32 x 3/4"  |
|       | 610118          | Cover, Spark plug (Use as required)                           |
|       | 27276           | Cover, Spark plug   |
|       | 590343          | Rope Assy., Starter   |
|       | 28301           | Pulley, Rope starter  |
|       | 650764          | Nut, "U" Type (Use as required)                               |
|       | 610973          | Terminal Ass'y. (As req. on late prod uction)                 |
|       | 31793           | Bearing, Ball   |
|       | 31855           | Retainer, Bearing   |
|       | 650778          | Washer, Lock  |
|       | 650580          | Nut, Lock   |
|       | 31792           | Washer, Thrust  |
|       | 550223          | Decal, Name   |
| 340   | 33328D          | Starter Motor Kit (110-120 Volt) This 110-120 volt starter    |
|       |                 | motor kit may have been added to this engine. It can be       |
|       |                 | added only if cylinder hasdrilled and tapped starter mounting |
|       |                 | bosses and a ring gear flywheel (see#342). Refer to service   |
|       |                 | number stamped on end cap of motor, or on decal, for          |
|       |                 | identifica  |
| 342   | 30811A          | Flywheel (Ring gear flywheel requiredon engines using         |
| 012   |                 | 110-120 volt starter kits listed above)                       |
|       |                 | ,   |
| 342   | 611042          | Flywheel (Used on Type letters H and above) (Std. Point       |
|       |                 | ignition) (Ring gear flywheel required on engines using       |
|       |                 | 110-120 volt starter kits listed above)                       |
| 342   | 611085          | Flywheel (Minimum ring gear flywheel required on engines      |
|       |                 | using 110-120 volt starter kits listed above) (Use withSolid  |
|       |                 | State ignition)   |
|       |                 | 5 ,   |

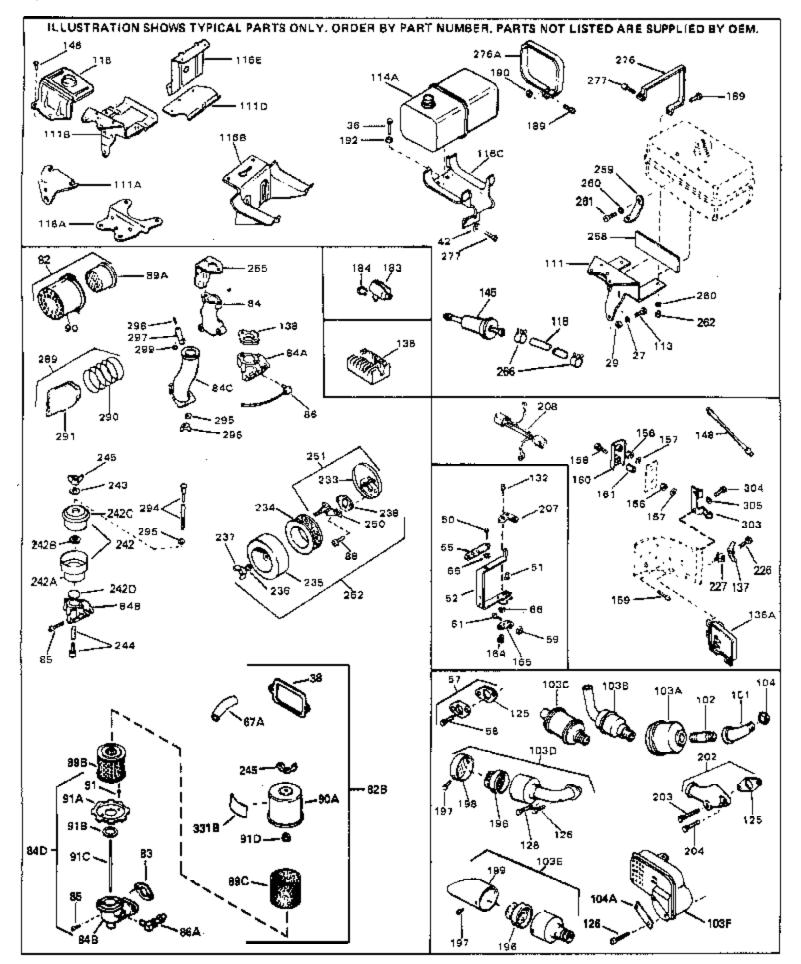

| Ref # | Part Number | Qty Description  |
|-------|-------------|--|
| 27    | 27513       | Lockwasher, 1/4" (Use as required)                             |
| 36    | 650697A     | Screw, 5/16-18 x 2-1/2" (Use as requi red)                     |
| 36    | 650695A     | Screw, 5/16-18 x 2-1/4" (Use as requi red)                     |
| 36    | 650694A     | Screw, 5/16-18 x 2" (Use as required)                          |
| 38    | 27896A      | * Gasket, Breather cover                                       |
| 42    | 26073       | Washer (Use as required)                                       |
| 42    | 650691      | Washer, Flat (Use as required)                                 |
| 50    | 650548      | Screw, 8-32 x 5/16"  |
| 51    | 30319       | Rivet, Split (Used in early productio n)                       |
| 52    | 32326A      | Lever, Governor (New lever does not need 1 of                  |
|       |             | 51,66,132,164,165,207)   |
| 55    | 30205       | Bracket, Adjusting   |
| 57    | 730130      | Exh.Adap.Kit (Incl. 58 & 125) (Use as req.)                    |
| 58    | 30196       | Screw, 5/16-18 x 3/4" (Use as require d)                       |
| 59    | 29216       | Nut, Lock, 10-32   |
| 61    | 29826       | Screw, 10-32 x 3/4"  |
| 66    | 29918       | Lockwasher, #8 E.T.  |
| 82B   | 730561      | Air cleaner kit (Incl. 38, 67A, 83, 84B, 85,89B, 89C, 90A, 91, |
|       |             | 91A, 91B, 91C, 91D, 245 & 331B) (Use only on engines with      |
|       |             | an externally vented fully adjustable carburetor)              |
| 82    | 730127      | Air Cleaner Ass'y. (Incl. 60, 83, 87, 88, 89A, 90, 238 & 331B) |
|       |             | (Use as required)  |
| 83    | 27272A      | * Gasket, Air cleaner  |
|       | 34819       | Air Cleaner Elbow (Incl. 84B, 86A, 91, 91A, 91B & 91C) (Use    |
|       |             | in 730561 assembly only)                                       |
| 88    | 28820       | Screw, 10-32 x 1/2"  |
|       | 31700       | Element, Air cleaner   |
|       | 31715       | Body, Air cleaner  |
|       | 30209       | Elbow, Exhaust (45 degree)                                     |
|       | 30244       | Muffler Nipple   |
|       | 391026      | Opt. Spark Arrest Muffler (Incl.196,1 97,199)                  |
|       | 29633       | Muffler  |
|       | 31694       | Bracket, Fuel tank   |
|       | 650561      | Screw, 1/4-20 x 5/8"   |
|       | 29774       | Fuel Line (Braided 8-1/4" 21 cm)(Use as req.)                  |
|       | 30705       | Fuel Line (Braided 16") (41 cm) (Use as req.)                  |
|       | 30962       | Fuel Line (Braided 32") (81 cm) (Use as req.)                  |
|       | 650694A     | Screw, 5/16-18 x 2" (Use as required)                          |
|       | 650548      | Screw, 8-32 x 5/16" (Early production )                        |
|       | 34067       | Wire Assy., Alternator adapter (4-1/4 ")                       |
|       | 34069       | Wire Assy., Alternator adapter (6-3/4 ")                       |
|       | 6201        | Screw, 1/4-28 x 7/8"   |
|       | 31288       | Exh. Adaptor Kit (Incl.125,203,204) ( As req.)                 |
|       | 650697A     | Screw, 5/16-18 x 2-1/2" (Use as requi red)                     |
|       | 6021A       | Screw, 5/16-18 x 1-1/2" (Use as required)                      |
|       | 29752       | Nut, Lock  |
|       | 26460       | Clamp, Fuel line   |
|       | 31697       | Strap, Fuel tank   |
|       | 29212       | Screw, Hex hd. Sems, 1/4-28 x 7/16                             |
|       |             |  |