




| Ref # | Part Number | Qtv | Description |
|-------|-------------|-----|---|
| | 34096C | | Cylinder (CI liner)(3-5/16")(Incl.2,20,41,43,72 & 119) |
| | 27652 | | Pin, Dowel |
| | 650494 | | Screw, 6-40 x 5/16" |
| | | | |
| | 30700 | | Yoke, Governor |
| | 30699C | | Rod Assy., Governor (Incl. 15A & 15B) |
| | 33454 | | Governor Lever Assy. |
| 17 | 29916 | | Clamp, Governor lever |
| 18 | 650548 | | Screw, 8-32 x 5/16" |
| | 32630 | | Seal, Oil |
| | 35256A | | Blower Housing Baffle (With electric starter knockout) (Use |
| 20 | 00200/ T | | as required) |
| 05 | 20522 | | . , |
| 25 | 29536 | | Blower Housing Baffle (Without electric starter knockout) (Use as required) |
| 00 | CEOECA | | |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33453A | | Crankshaft (Incl. 108 & 109) |
| | 29826 | | Screw, 10-32 x 3/4" |
| 36 | 29918 | | Lockwasher, #8 E.T. |
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| | 29216 | | Locknut, 10-32 |
| | 29642 | | Ring, Retaining |
| | 34543 | | Piston, Pin & Ring Set (Std.) (3-3/16 ") |
| | | | |
| | 34544 | | Piston, Pin & Ring Set (.010" OS) |
| | 34545 | | Piston, Pin & Ring Set (.020" OS) |
| | 34031B | | Piston & Pin Ass'y. (Std.)(3-3/16")(I ncl.43) |
| 41 | 34032B | | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 | 34033B | | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 34037 | | Ring Set (Std.) (3-3/16" Bore) |
| | 34038 | | Ring Set (.010" OS) |
| | 34039 | | Ring Set (.020" OS) |
| | | | |
| | 27888 | | Ring, Piston Pin retaining |
| | 32591C | | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| 47 | 650662C | | Bolt, Connecting rod (2 pieces) |
| 48 | 34034 | | Lifter, Valve |
| 49 | 34242 | | Dipper, Oil |
| | 34143 | | Camshaft (MCR) |
| | 33273A | | Extension, Blower housing |
| | | | |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet, Plastic |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 35262 | | * Gasket, Flange |
| 70 | 33367B | | Cover, Cylinder (Incl. 71, 75 & 80) |
| | 33368 | | Bushing, Crankshaft |
| | 27642 | | Plug, Oil drain |
| | 31950 | | Seal, Oil |
| | 31845 | | |
| | | | Shaft, Mechanical governor |
| | 30590A | | Washer, Flat |
| | 30591 | | Gear Assy., Governor (Incl. 81) |
| | 30588A | | Spool, Governor |
| 84 | 29193 | | Ring, Retaining |
| | 650833 | | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| | 650832 | | Screw, 1/4-20 x 1-11/16" (Use as required) |
| | 32589 | | Key, Flywheel |
| | | | |
| | 650815 | | Washer, Belleville |
| | 8116 | | Nut, Hex |
| | 27276 | | Cover, Spark plug |
| 103 | 650489 | | Screw, 1/4-20 x 5/8" |
| | | | |


| Ref # Pa | art Number Qty | Description |
|--------------------|----------------|---|
| 108 29 | . | Pin, Crankshaft gear (Only serviceable when gear is pinned |
| | | to crank.) |
| | | • |
| 109 332 | | Gear, Crankshaft |
| 110 30 | 831 | Ground Wire (Incl. 156) |
| 119 349 | 923A | * Gasket, Cylinder head |
| 120 34 | 030A | Head, Cylinder |
| 125 278 | | Exhaust Valve (Std.) (Incl. 151) |
| 125 278 | | Exhaust Valve (1/32" OS) (Incl. 151) |
| 126 34 | | Intake Valve (Std.) (Incl. 151) |
| 126 34 | | Intake Valve (1/32" OS) (Incl. 151) |
| 127 650 | | Washer (Do not use with No. 6021A scr ew.) |
| | | |
| 128 650 | | Washer, Belleville (Use as required) |
| 129 650 | | Screw, 5/16-18 x 1-3/4 (Use as required) |
| 130 602 | 21A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse No. |
| | | 650691 washer.) |
| 130 650 | 0711 | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A |
| | • | but discard 650691 washer.) |
| 400 05 | 00044 | , |
| 130 650 | | Screw, 5/16-18 x 2" (Use as required) |
| 131 65 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 65 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A 650 | | Screw, 5/16-18 x 5/8" |
| 133 650 | 0890 | Washer, Internal Lock |
| 134 30 | 747 | Clip, Spark plug shorting |
| 135 330 | 636 | Resistor Spark Plug |
| 139 33 | 369 | Bracket, Governor gear |
| 140 650 | 0836 | Screw, 10-24 x 1/2" |
| 149A 358 | | Seal Assy., Intake valve |
| 150 278 | | Spring, Valve |
| 151 329 | | Cap, Lower valve spring |
| 169 278 | | * Gasket, Breather |
| 170 28 | | Body, Breather |
| | | · · · · · · · · · · · · · · · · · · · |
| 171 28 | | Element, Breather |
| 172 28 | | Cover, Breather |
| 173 35 | | Tube, Breather |
| 174 650 | | Screw, 10-24 x 1/2" |
| 178 29 | | Nut & Lockwasher, 1/4-28 |
| 182 30 | 088A | Screw, 1/4-28 x 1" |
| 184 33: | 263 | * Gasket, Carburetor |
| 185 34 | 707 | Pipe, Intake |
| 207 33 | 878 | Link, Governor lever-to-throttle |
| 222A | | Pop Rivet (Can be purchased locally) |
| 223 650 | 0378 | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| 224 279 | | * Gasket, Intake pipe |
| 250B 33 | | Cover, Air cleaner |
| 260 33 | | Blower Housing (For electric starter) |
| 261 650 | | Screw, 5/16-18 x 3/4" |
| 262 29 | | · |
| | | Screw, 5/16-24 x 21/32" Cover, Cylinder bood |
| 265 333 275 225 | | Cover, Cylinder head |
| 275 333 | | Muffler |
| 276 31 | | Plate, Muffler locking |
| 276 35 | | Plate, Muffler locking |
| 277 650 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 65 | 1002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 285A 33 | 662 | Hub & Screen Assy. |
| 287 29 | | Nut, 1/4-28 |
| 290 29 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | | |


| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | | Fuel Line (Braided 16")(40cm)(As required) |
| | 26460 | | Fuel Line Clamp (Use as required) |
| | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" I.D.) |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use as required) (1.5" I.D.) |
| 301A | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 29673 | | * Gasket, Oil filler |
| 310B | 35941 | | Dipstick (Incl. 306) |
| 310 | 31297 | | Dipstick (Incl. 307) |
| 338A | 31291 | | Plug, Cover |
| 340 | 34154 | | Plate, Upper fuel tank mtg. |
| 341 | 34155 | | Bracket, Lower fuel tank mtg. |
| 342 | 650561 | | Screw, 1/4-20 x 5/8" |
| | 30063 | | Screw, Torx T-30, 1/4-20 x 1/2" |
| 370 | 35274 | | Decal, Instruction |
| 379 | 631021 | | Inlet Needle, Seat & Clip Assy. |
| 380 | 631931A | | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page 150 for breakdown Grid E-5) |
| 395 | 35763A | | Electric Starter Motor (12 Volt) (Refer to service number stamped on end cap of motor, or on decal, for identification. Refer to Division 5, Section D for breakdown or Fiche 18B, Grid G-6) |
| 400 | 33279G | | * Gasket Set (Incl. items marked *) |
| | 730225 | | SAE 30 4-Cycle Engine Oil (Quart) |
| 421 | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | | Muffler Optional |

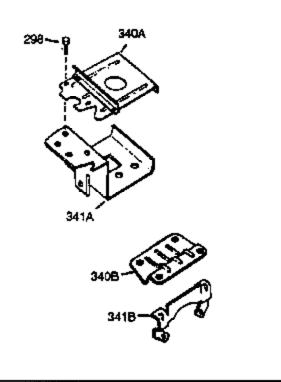






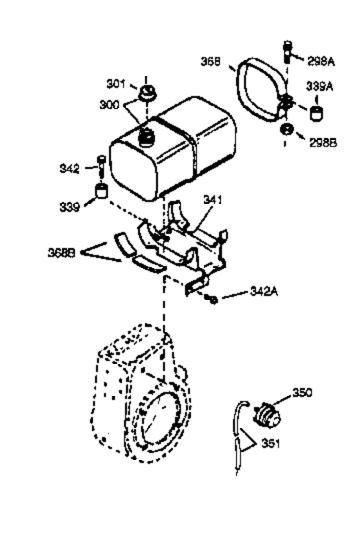


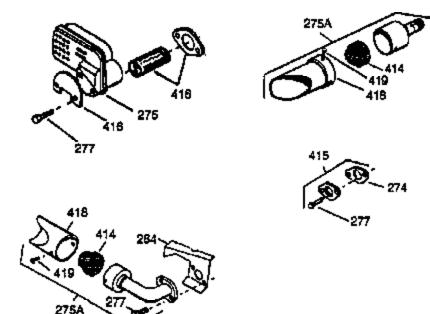

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| | 30322 | | Nut & Lockwasher, 8-32 |
| 62 | 650760 | | Screw, 8-32 x 3/8" |
| 63 | 28545 | | Grommet, Plastic |
| 68 | 33356 | | Tab, Ground terminal |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 250B | 33269A | | Cover, Air cleaner |
| 274 | 35865 | | Gasket, Exhaust |
| 275 | 33280A | | Muffler |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as required) |
| 285A | 33662 | | Hub & Screen Assy. |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | | Fuel Line (Braided 32")(80cm)(As requ ired) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301Δ | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 30 IA | 4101440 | | I.D.) |
| | | | · |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | 0.2.0 | | as required) (1.5" I.D.) |
| 0014 | 05055 | | . , , , |
| | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 29673 | | * Gasket, Oil filler |
| | 35941 | | Dipstick (Incl. 306) |
| | 31291 | | Plug, Cover |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33323 | | Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | | Muffler Optional |
| | | | |

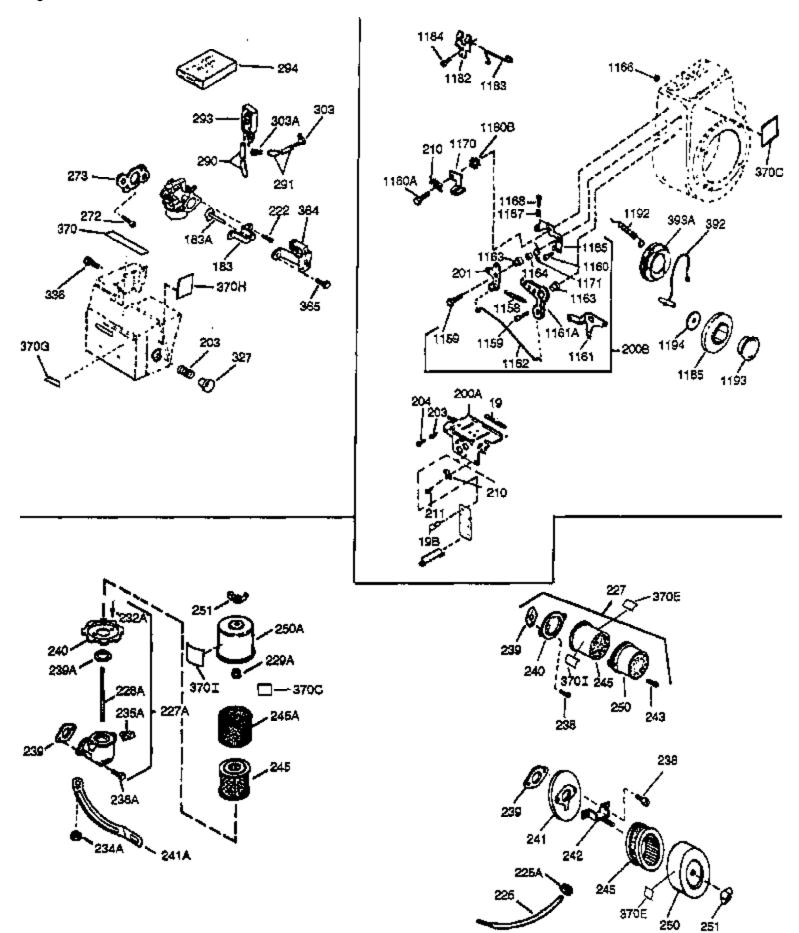

| | Part Number | Qty | Description |
|-------|-------------|-----|---|
| | 30322 | | Nut & Lockwasher, 8-32 |
| | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 200B | 730152 | | Control Bracket (Incl.1158-1171)(As r eq.) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 227 | 730127 | | Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as |
| | | | required) |
| 238 | 28820 | | Screw, 10-32 x 1/2" |
| | 27272A | | * Gasket, Air cleaner |
| | 33266 | | Bracket, Air cleaner |
| | 33267 | | Bracket, Air cleaner |
| | 33268 | | Element, Air cleaner |
| | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing 1/4-20 |
| | 33662 | | Hub & Screen Assy. |
| | 29774 | | • |
| | | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | | Fuel Line (Braided 16")(40cm)(As required) |
| 293 | 33715 | | Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps |
| | | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps |
| | | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| | | | • |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | | I.D.) |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 00171 | 00002 | | required) (1.5" I.D.) |
| | | | |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 3∩1∆ | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 32958 | | Fitting, Fuel |
| | 29673 | | * Gasket, Oil filler |
| | 35941 | | • |
| | | | Dipstick (Incl. 306) |
| | 31291 | | Plug, Cover |
| | 35274 | | Decal, Instruction |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| | 30312 | | Screw, 10-32 x 1/2" |
| | 28820 | | Screw, 10-32 x 1/2" |
| | 27070 | | Lockwasher |
| 1185 | 33816 | | Hub & Screen Assy. |
| | | | |

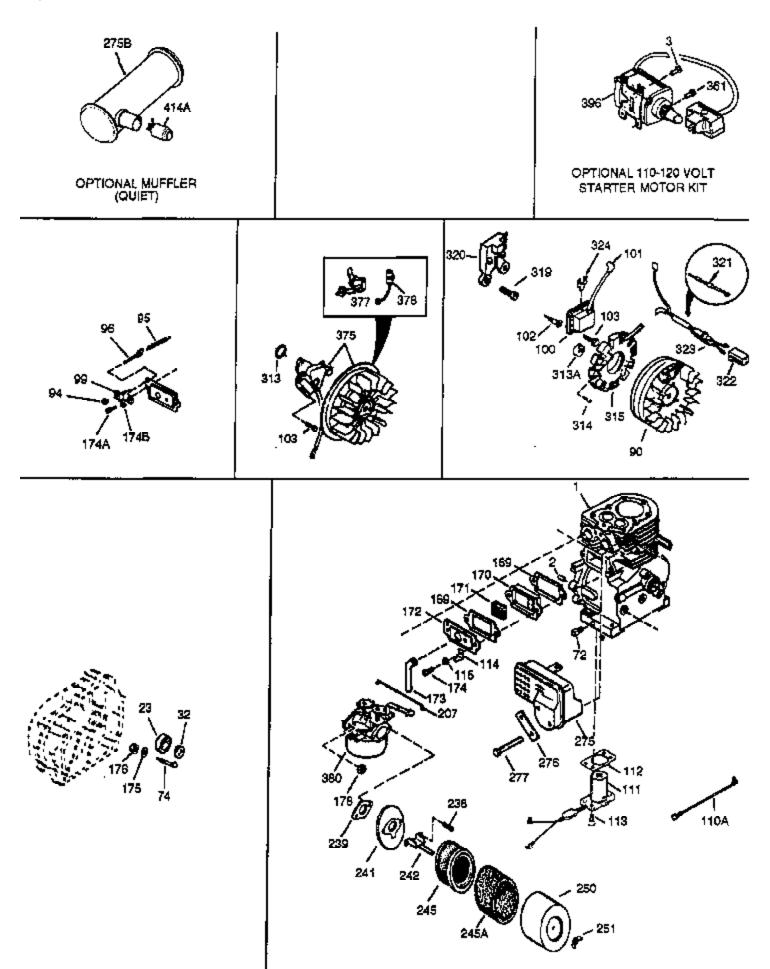

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| | 34096C | Cylinder (CI liner)(3-5/16")(Incl.2,20,41,43,72 & 119) |
| 2 | 27652 | Pin, Dowel |
| 37A | 30322 | Nut & Lockwasher, 8-32 |
| 72 | 27642 | Plug, Oil drain |
| 94 | 33450 | Lock Nut, 10-32 |
| 95 | 30886A | Spring, Governor bolt |
| 96 | 30845A | Bolt, Governor adjusting |
| 101 | 27276 | Cover, Spark plug |
| 103 | 650489 | Screw, 1/4-20 x 5/8" |
| 129 | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" |
| 169 | 27896A | * Gasket, Breather |
| 170 | 28423 | Body, Breather |
| 171 | 28424 | Element, Breather |
| 172 | 28425 | Cover, Breather |
| 173 | 35350 | Tube, Breather |
| 174 | 650128 | Screw, 10-24 x 1/2" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| 207 | 33878 | Link, Governor lever-to-throttle |
| 222A | | Pop Rivet (Can be purchased locally) |
| 238 | 28820 | Screw, 10-32 x 1/2" |
| 239 | 27272A | * Gasket, Air cleaner |
| 241 | 33266 | Bracket, Air cleaner |
| 242 | 33267 | Bracket, Air cleaner |
| 245 | 33268 | Element, Air cleaner |
| 250B | 33269A | Cover, Air cleaner |
| 251 | 650513 | Nut, Wing 1/4-20 |
| | 33280A | Muffler |
| 275B | 391026 | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| | | mufflercan be used on any model.) |
| 276 | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| | 650729 | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| | 651002 | Screw, 5/16-18 x 4-1/4" (Use as required) |
| | 33662 | Hub & Screen Assy. |
| | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 001/1 | 101115 | I.D.) |
| 2244 | 0000 | , |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 201 A | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 29673 | * Gasket, Oil filler |
| | 35941 | Dipstick (Incl. 306) |
| | 33876 | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 31291 | Plug, Cover |
| | 30063 | Screw, Torx T-30, 1/4-20 x 1/2" |
| | | |
| 3/3 | 610848 | Magneto (w/ring gear for 120 Volt sta rter) NOTE: The |
| | | complete magneto is not available as an assembly. |
| | | Themagneto number is shown for reference purpose only. |
| | | Order component parts individually, as shown in parts list. |
| | | (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18B, Grid F-1 |
| | | TIGIE 10D, OIRT-T |

| Ref # | Part Number | Qty | Description |
|-------|-----------------|-----|--|
| 377 | 30547A | - | Breaker Points (Use with Std. point i gn.) |
| 378 | 30548B | | Condenser |
| 380 | 631931A | | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page 150 for breakdown Grid E-5) |
| | 730226 35824 | | SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |