




| | | Qty | Description |
|-----|---------|-----|---|
| | 34922A | | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | | Pin, Dowel |
| 3 | 650820 | | Screw, 1/4-20 x 1/2" |
| 4 | 32678 | | Nipple, Oil drain |
| 5 | 30969 | | Cap, Oil drain |
| 15B | 650494 | | Screw, 6-40 x 5/16" |
| | 30699C | | Rod Assy., Governor (Incl. 15A & 15B) |
| | 30700 | | Yoke, Governor |
| | 33454 | | Governor Lever Assy. |
| | 29916 | | Clamp, Governor lever |
| | | | |
| | 650548 | | Screw, 8-32 x 5/16" |
| | 32630 | | Seal, Oil |
| 25 | 29536 | | Blower Housing Baffle (Without electric starter knockout) |
| | | | (Use as required) |
| 25 | 35256A | | Blower Housing Baffle (With electric starter knockout) (Use |
| 25 | 30230A | | , , |
| | | | as required) |
| 26 | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33365B | | Crankshaft (Incl. 108 & 109) |
| | 29826 | | Screw, 10-32 x 3/4" |
| | 29918 | | Lockwasher, #8 E.T. |
| | 30322 | | Nut & Lockwasher, 8-32 |
| | 29216 | | Locknut, 10-32 |
| | | | · |
| | 29642 | | Ring, Retaining |
| | 34860A | | Piston, Pin & Ring Set (Std.)(3-5/16") |
| | 34861A | | Piston, Pin & Ring Set (.010" OS) |
| | 34862A | | Piston, Pin & Ring Set (.020" OS) |
| 41 | 34863 | | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| 41 | 34864 | | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 | 34865 | | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| 42 | 34866A | | Ring Set (Std.) (3-5/16" Bore) |
| | 34867A | | Ring Set (.010" OS) |
| | 34868A | | Ring Set (.020" OS) |
| | 27888 | | Ring, Piston Pin retaining |
| | 32591C | | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| | | | . , , |
| | 34034 | | Lifter, Valve |
| | 34242 | | Dipper, Oil |
| | 34143 | | Camshaft (MCR) |
| | 33273A | | Extension, Blower housing |
| | 34126 | | Bracket, Grommet mounting |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet, Plastic |
| 65 | 650128 | | Screw, 10-24 x 1/2" |
| 69 | 35262 | | * Gasket, Flange |
| | 33367B | | Cover, Cylinder (Incl. 71, 75 & 80) |
| | 33368 | | Bushing, Crankshaft |
| | 27642 | | Plug, Oil drain |
| | 31950 | | Seal, Oil |
| | 31845 | | Shaft, Mechanical governor |
| | | | |
| | 30590A | | Washer, Flat |
| | 30591 | | Gear Assy., Governor (Incl. 81) |
| | 30588A | | Spool, Governor |
| | 29193 | | Ring, Retaining |
| | 650833 | | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| 87 | 650832 | | Screw, 1/4-20 x 1-11/16" (Use as requ ired) |
| 89 | 32589 | | Key, Flywheel |
| | | | |


| 92 93 101 103 | Part Number 650815 8116 610118 650516 29783 | Qty | Description Washer, Belleville Nut, Hex Cover, Spark plug Screw, 1/4-20 x 1-1/8" Pin, Crankshaft gear (Only serviceable when gear is pinned to crank.) |
|--|--|-----|--|
| 110 119 120 125 125 126 126 127 128 129 | 33245 34240 34923A 34030A 27878A 27880A 34035 34036 650691 650690 650727 6021A | | Gear, Crankshaft Ground Wire * Gasket, Cylinder head Head, Cylinder Exhaust Valve (Std.) (Incl. 151) Exhaust Valve (1/32" OS) (Incl. 151) Intake Valve (Std.) (Incl. 151) Intake Valve (1/32" OS) (Incl. 151) Washer (Do not use with No. 6021A scr ew.) Washer, Belleville (Use as required) Screw, 5/16-18 x 1-3/4 (Use as required, but do notuse No. 650691 washer.) |
| 130 | 650711 | | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A but discard 650691 washer.) |
| 131A 131 133 135 139 140 149A 150 151 169 170 171 172 173 174 178 182 183 184 185 186 200 203 204 206 207 209 210 211 219 | 650694A 650713 650737 650738 650890 33636 33369 650836 35862 27881 32581 27896A 28423 28424 28425 35350 650128 29752 30088A 34587 33263 33877 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 | | Screw, 5/16-18 x 2" (Use as required) Screw, 5/16-18 x 5/8" Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8 (Use as required) Washer, Internal Lock Resistor Spark Plug Bracket, Governor gear Screw, 10-24 x 1/2" Seal Assy., Intake valve Spring, Valve Cap, Lower valve spring * Gasket, Breather Body, Breather Element, Breather Cover, Breather Tube, Breather Tube, Breather Screw, 10-24 x 1/2" Nut & Lockwasher, 1/4-28 Screw, 1/4-28 x 1" Bracket, Choke * Gasket, Carburetor Pipe, Intake Link, Governor lever Control Bracket (Incl.19,203, 204, 20 6 & 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. Link, Governor lever-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control |
| 222A 222 | 28820 | | Pop Rivet (Can be purchased locally) Screw, 10-32 x 1/2" |


| Ref # | Part Number Q | ty Description |
|-------|---------------|---|
| 223 | 650378 | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| 224 | 27915A | * Gasket, Intake pipe |
| 260 | 34822A | Blower Housing |
| 261 | 650788 | Screw, 5/16-18 x 3/4" |
| 262 | 29747B | Screw, 5/16-24 x 21/32" |
| 265 | 33272B | Cover, Cylinder head |
| 275 | 34185A | Muffler |
| 276 | 31588 | Plate, Muffler locking |
| 276 | 35741 | Plate, Muffler locking |
| 277 | 650729 | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| | 651002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| | 33013 | Cover, Starter bubble |
| | 650760 | Screw, 8-32 x 7/16" |
| | 33662 | Hub & Screen Assy. |
| | 29752 | Nut, 1/4-28 |
| | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | Fuel Line (Braided 32")(80cm)(As requ ired) |
| | 30705 | Fuel Line (Braided 16")(40cm)(As requ ired) |
| | 26460 | Fuel Line Clamp (Use as required) |
| | 650665 | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | builtwith different size fuel inlet openings. Tanks with the |
| | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 301A | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33893A | Oil Fill Tube |
| 307 | 33590 | "O" Ring |
| 310 | 34011A | Dipstick (Incl. 307) |
| 336 | 650765 | Screw, 10-32 x 1/2" |
| | 34666 | Cover, Carburetor |
| 338 | 28942 | Screw, Sems 10-32 x 3/8" |
| 338A | 31291 | Plug, Cover |
| 340 | 34154 | Plate, Upper fuel tank mtg. |
| 341 | 34155 | Bracket, Lower fuel tank mtg. |
| 342 | 650561 | Screw, 1/4-20 x 5/8" |
| 359 | 34141 | Guard, Starter |
| 360 | 32576 | Seal, Snow Guard |
| 365 | 650767 | Screw, 8-32 x 27/64" |
| 370 | 35274 | Decal, Instruction |
| 379 | 631021 | Inlet Needle, Seat & Clip Assy. |
| 380 | 632110 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | page 168 for breakdown or Fiche18B, Grid E-9) |
| 400 | 33279G | * Gasket Set (Incl. items marked *) |
| 420 | 730225 | SAE 30 4-Cycle Engine Oil (Quart) |
| 421 | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | Muffler Optional |
| | | |

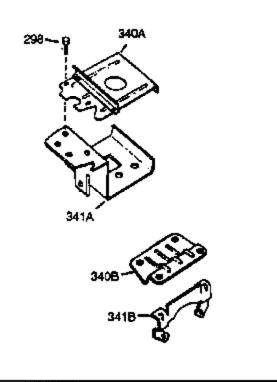


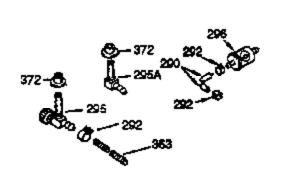


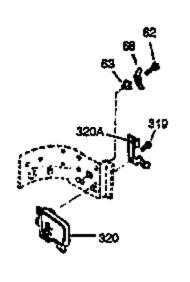


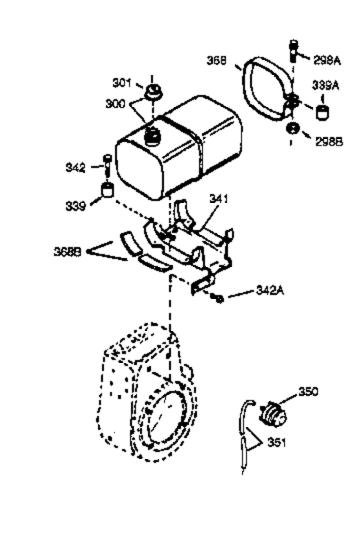











| Ref # | Part Number | Qty | Description |
|-------------|----------------|-----|---|
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| 62 | 650760 | | Screw, 8-32 x 3/8" |
| 63 | 28545 | | Grommet, Plastic |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 274 | 35865 | | Gasket, Exhaust |
| 275 | 34185A | | Muffler |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 285A | 33662 | | Hub & Screen Assy. |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 55 t | | | I.D.) |
| 0044 | 00000 | | · |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 201 / | 25255 | | |
| | 35355 34666 | | Fuel Cap (Red Plastic)(1.75" I.D.) Cover, Carburetor |
| | | | Plug, Cover |
| | 31291 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 570682 | | Primer Assy. |
| | 32180C | | • |
| | 33323 | | Line, Primer Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| 722 | 000 <u>L</u> T | | Manor Optional |

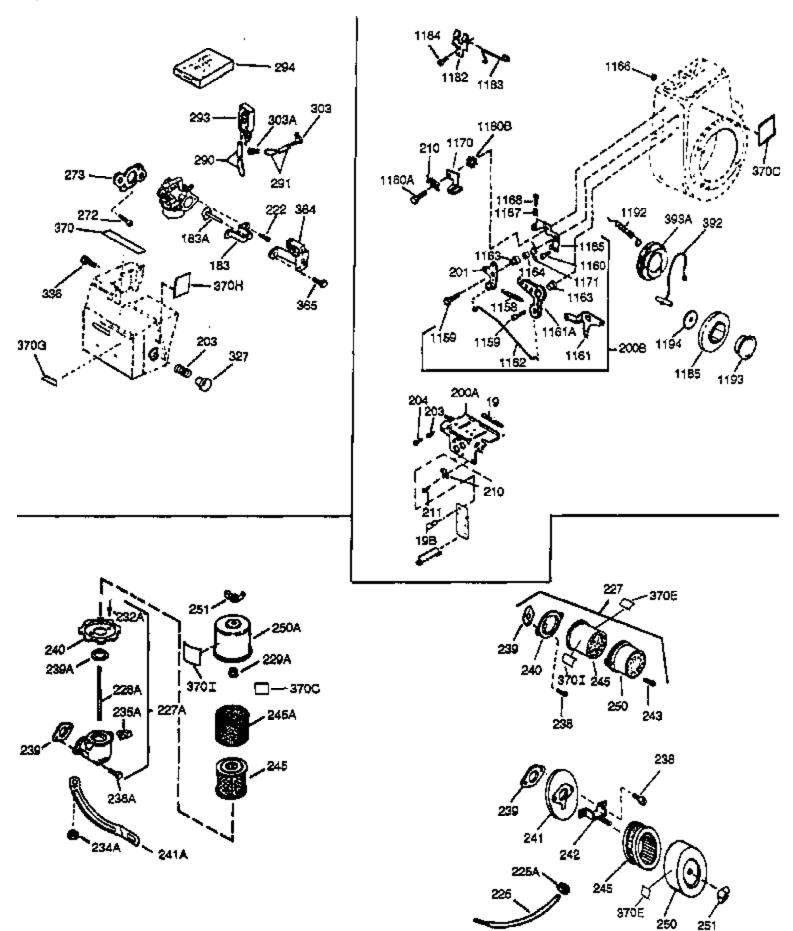

| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| 37A | 30322 | Nut & Lockwasher, 8-32 |
| 129 | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| | 34587 | Bracket, Choke |
| 200B | 730152 | Control Bracket (Incl.1158-1171)(As r eq.) |
| 203 | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| 222 | 28820 | Screw, 10-32 x 1/2" |
| 222A | | Pop Rivet (Can be purchased locally) |
| | 730127 | Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as |
| | | required) |
| 0054 | 00000 | |
| | 33662 | Hub & Screen Assy. |
| | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | Fuel Line (Braided 16")(40cm)(As requ ired) |
| 293 | 33715 | Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps |
| | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps |
| | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | is used with the 35813 and 35800 fuel pumps. |
| 0014 | 4404445 | • • |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| 004.4 | 0.404.0 | • , , , |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 301A | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 32958 | Fitting, Fuel |
| | 650765 | Screw, 10-32 x 1/2" |
| | 34666 | Cover, Carburetor |
| | 31291 | Plug, Cover |
| | 33377 | Bracket, Carburetor cover mtg. |
| | 650767 | Screw, 8-32 x 27/64" |
| | 35274 | Decal, Instruction |
| | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | Muffler Optional |
| | 30312 | Screw, 10-32 x 1/2" |
| | 28820 | Screw, 10-32 x 1/2" |
| | 27070 | Lockwasher |
| | 33816 | Hub & Screen Assy. |
| 1100 | 00010 | TIME & OUTGOTT MODY. |

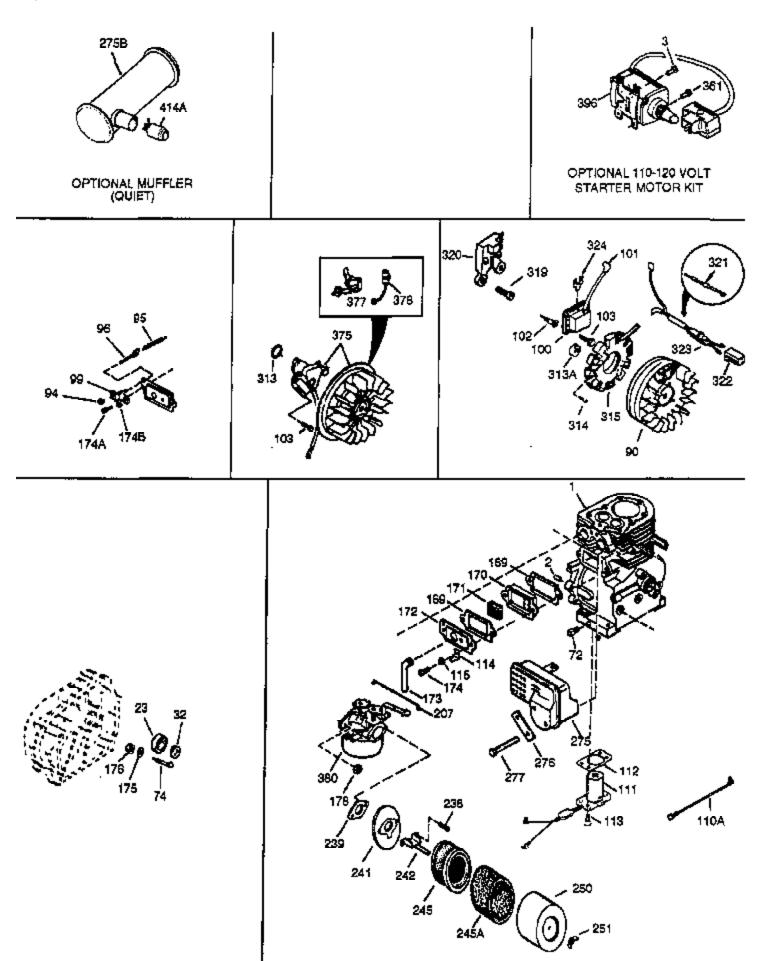

| Ref # | Part Number Qt | y Description |
|-------|----------------|---|
| | 34922A | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | Pin, Dowel |
| | 650820 | Screw, 1/4-20 x 1/2" |
| | 30322 | Nut & Lockwasher, 8-32 |
| | 27642 | Plug, Oil drain |
| | | |
| | 610118 | Cover, Spark plug |
| | 650516 | Screw, 1/4-20 x 1-1/8" |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| 169 | 27896A | * Gasket, Breather |
| 170 | 28423 | Body, Breather |
| 171 | 28424 | Element, Breather |
| 172 | 28425 | Cover, Breather |
| 173 | 35350 | Tube, Breather |
| 174 | 650128 | Screw, 10-24 x 1/2" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| 207 | 33878 | Link, Governor lever-to-throttle |
| 222A | | Pop Rivet (Can be purchased locally) |
| | 391026 | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| 2.02 | 00.020 | mufflercan be used on any model.) |
| | | • • |
| | 34185A | Muffler |
| | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| 277 | 650729 | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 285A | 33662 | Hub & Screen Assy. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 3∩1∆ | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 301A | 33002 | required) (1.5" I.D.) |
| | | |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 201Δ | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33876 | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 34666 | Cover, Carburetor |
| | 31291 | · |
| | | Plug, Cover Magneta (w/ring goor) (13 \/olt 3 Amp.) |
| 3/3 | 610982 | Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The |
| | | complete magneto is not available as an assembly. |
| | | Themagneto number is shown for reference purpose only. |
| | | Order component parts individually, as shown in parts list. |
| | | (Refer to Division 5, Section B, page 36 for breakdown or |
| | | Fiche 18B, Grid F-3 |
| 377 | 30547A | Breaker Points (Use with Std. point i gn.) |
| | 610767A | Condenser |
| | 632110 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| 500 | 002110 | page 168 for breakdown or Fiche18B, Grid E-9) |
| | | |
| | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | Muffler Optional |
| | | |