



| | Part Number Qty | |
|-----|-----------------|---|
| | 34922A | Cylinder (Cl liner)(3-5/16")(Incl.2,2 0 & 72) |
| 2 | 27652 | Pin, Dowel |
| 3 | 650820 | Screw, 1/4-20 x 1/2" |
| | 30968 | Nipple, Oil drain |
| | 30969 | Cap, Oil drain |
| | | • |
| | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| | 30700 | Yoke, Governor |
| 15B | 650494 | Screw, 6-40 x 5/16" |
| 16 | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | 650548 | Screw, 8-32 x 5/16" |
| | 32630 | |
| | | Seal, Oil |
| 25 | 29536 | Blower Housing Baffle (Without electric starter knockout) (Use as required) |
| 25 | 35256A | Blower Housing Baffle (With electric starter knockout) (Use |
| 20 | | as required) |
| | 650561 | Screw, 1/4-20 x 5/8" |
| 30 | 33459A | Crankshaft (Incl. 108 & 109) |
| 35 | 29826 | Screw, 10-32 x 3/4" |
| | 29918 | Lockwasher, #8 E.T. |
| | 29216 | Locknut, 10-32 |
| | | |
| | 30322 | Nut & Lockwasher, 8-32 |
| | 29642 | Ring, Retaining |
| 40 | 34860A | Piston, Pin & Ring Set (Std.)(3-5/16") |
| 40 | 34861A | Piston, Pin & Ring Set (.010" OS) |
| 40 | 34862A | Piston, Pin & Ring Set (.020" OS) |
| | 34863 | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| | 34864 | |
| | | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| | 34865 | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 34866A | Ring Set (Std.) (3-5/16" Bore) |
| 42 | 34867A | Ring Set (.010" OS) |
| 42 | 34868A | Ring Set (.020" OS) |
| 43 | 27888 | Ring, Piston Pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| | 650662C | |
| | | Bolt, Connecting rod (2 pieces) |
| | 650662C | Bolt, Connecting rod (2 pieces) |
| 48 | 34034 | Lifter, Valve |
| 49 | 34242 | Dipper, Oil |
| 50 | 34143 | Camshaft (MCR) |
| | 33273A | Extension, Blower housing |
| | 34126 | Bracket, Grommet mounting |
| | | |
| | 650760 | Screw, 8-32 x 3/8" |
| | 28545 | Grommet, Plastic |
| | 650128 | Screw, 10-24 x 1/2" |
| 69 | 35262 | * Gasket, Flange |
| | 33367B | Cover, Cylinder (Incl. 71, 75 & 80) |
| | 33368 | Bushing, Crankshaft |
| | 27642 | Plug, Oil drain |
| | | |
| | 31950 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| 81 | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | | • |
| | 29193 | Ring, Retaining |
| | 650833 | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| | | |
| 87 | 650832 32589 | Screw, 1/4-20 x 1-11/16" (Use as required) |

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| 92 | 650815 | Washer, Belleville |
| 93 | 8116 | Nut, Hex |
| 101 | 610118 | Cover, Spark plug |
| 103 | 650516 | Screw, 1/4-20 x 1-1/8" |
| | 29783 | Pin, Crankshaft gear (Only serviceable when gear is pinned |
| | | to crank.) |
| 109 | 33245 | Gear, Crankshaft |
| 110 | 34240 | Ground Wire |
| 119 | 34923A | * Gasket, Cylinder head |
| 120 | 34030A | Head, Cylinder |
| 125 | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| 125 | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| 126 | 34035 | Intake Valve (Std.) (Incl. 151) |
| 126 | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| 127 | 650691 | Washer (Do not use with No. 6021A scr ew.) |
| | 650690 | Washer, Belleville (Use as required) |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse No. |
| 100 | | 650691 washer.) |
| 130 | 650711 | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A |
| | | but discard 650691 washer.) |
| 130 | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| | 650890 | Washer, Internal Lock |
| | 33636 | Resistor Spark Plug |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 35862 | Seal Assy., Intake valve |
| | 27881 | Spring, Valve |
| | 32581 | Cap, Lower valve spring |
| | 27896A | * Gasket, Breather |
| | 28423 | Body, Breather |
| | 28424 | Element, Breather |
| | 28425 | Cover, Breather |
| | 35350 | Tube, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 29752 | Nut & Lockwasher, 1/4-28 |
| | 30088A | Screw, 1/4-28 x 1" |
| | 34587 | Bracket, Choke |
| | | |
| | 33263 | * Gasket, Carburetor |
| | 33877 | Pipe, Intake |
| | 34667 | Link, Governor lever |
| | 34677 | Control Bracket (Incl.19, 203, 204, 2 06, 209) |
| | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| | 610973 | Terminal Assy. |
| | 33878 | Link, Governor lever-to-throttle |
| | 650821 | Screw, 10-32 x 1/2" |
| | 32410 | Knob, Speed control |
| | 34586 | Rod, Choke |
| | 35438 | Knob, Control |
| 222A | | Pop Rivet (Can be purchased locally) |
| 222 | 28820 | Screw, 10-32 x 1/2" |
| 223 | 650378 | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| | | |


| | Part Number | Qty | Description |
|---------|-------------|-----|---|
| | 27915A | | * Gasket, Intake pipe |
| 260 | 34822A | | Blower Housing |
| 261 | 650788 | | Screw, 5/16-18 x 3/4" |
| 262 | 29747B | | Screw, 5/16-24 x 21/32" |
| | 33272B | | Cover, Cylinder head |
| | 35056 | | Muffler |
| | 31588 | | Plate, Muffler locking |
| | 35741 | | Plate, Muffler locking |
| | | | |
| | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as required) |
| | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as required) |
| | 33013 | | Cover, Starter bubble |
| | 650760 | | Screw, 8-32 x 7/16" |
| 285A | 33662 | | Hub & Screen Assy. |
| 287 | 29752 | | Nut, 1/4-28 |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | | Fuel Line (Braided 16")(40cm)(As required) |
| | 26460 | | Fuel Line Clamp (Use as required) |
| | | | |
| | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 3014 | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 00 // (| HUHB | | I.D.) |
| | | | |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| 001/1 | 0.2.10 | | as required) (1.5" I.D.) |
| | | | |
| 301A | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| 305 | 33893A | | Oil Fill Tube |
| 307 | 33590 | | "O" Ring |
| | 34011A | | Dipstick (Incl. 307) |
| | 29443 | | Clip, Fuel line |
| | 650765 | | Screw, 10-32 x 1/2" |
| | 35058 | | Cover, Carburetor |
| | | | |
| | 31291 | | Plug, Cover |
| | 28942 | | Screw, Sems 10-32 x 3/8" |
| | 34154 | | Plate, Upper fuel tank mtg. |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| 342 | 650561 | | Screw, 1/4-20 x 5/8" |
| 359 | 34141 | | Guard, Starter |
| | 32576 | | Seal, Snow Guard |
| | 650767 | | Screw, 8-32 x 27/64" |
| | 34679 | | Decal, Choke |
| | 34144 | | Decal, Primer |
| | | | • |
| | 34346 | | Decal, Instruction |
| | 35274 | | Decal, Instruction |
| | 631021 | | Inlet Needle, Seat & Clip Assy. |
| 380 | 632110 | | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | | page 168 for breakdown or Fiche18B, Grid E-9) |
| 400 | 33279G | | * Gasket Set (Incl. items marked *) |
| | 730225 | | SAE 30 4-Cycle Engine Oil (Quart) |
| | 730226 | | SAE 50 4-Cycle Engine Oil (Quart) |
| | | | |
| 422 | 35824 | | Muffler Optional |
| | | | |

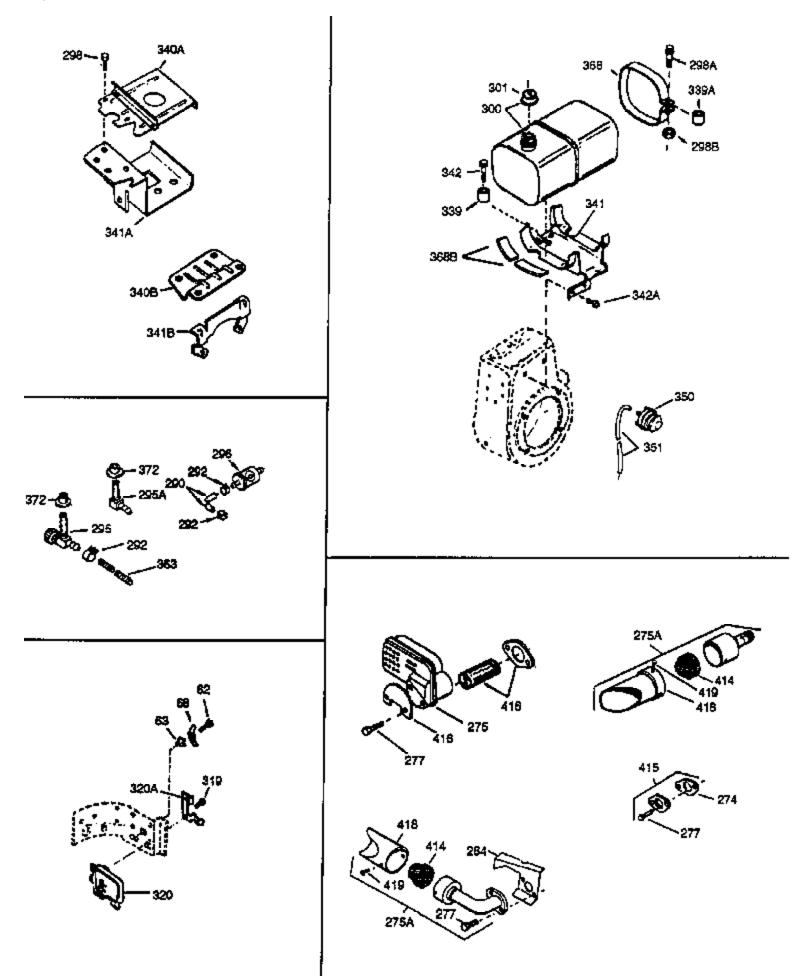

| Ref # | Part Number 0 | | Description |
|--------|---------------|----------|---|
| 37A : | 30322 | Ν | Nut & Lockwasher, 8-32 |
| 62 | 650760 | S | Screw, 8-32 x 3/8" |
| 63 (| 28545 | C | Grommet, Plastic |
| 129 | 650727 | S | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | S | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | S | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | S | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | F | Pop Rivet (Can be purchased locally) |
| 274 | 35865 | C | Gasket, Exhaust |
| 275C | 35056 | Ν | Muffler |
| 277 | 650729 | S | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | S | Screw, 5/16-18 x 4-1/4" (Use as required) |
| 285A 3 | 33662 | F | Hub & Screen Assy. |
| 290 | 29774 | F | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | F | Fuel Line (Braided 32")(80cm)(As required) |
| 292 | 26460 | F | Fuel Line Clamp (Use as required) |
| 298 | 650665 | S | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | F | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | I-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | I-1/2" I.D. opening use fuel cap 35355. |
| 0044 | | | |
| 301A 4 | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | ١. | .D.) |
| 301A 3 | 33032 | F | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 0044 | 0.404.0 | | |
| 301A 3 | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | а | as required) (1.5" I.D.) |
| 301A 3 | 35355 | F | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 35058 | | Cover, Carburetor |
| 338A | | | Plug, Cover |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 570682 | | Primer Assy. |
| | | | |
| | 32180C | | |
| 370D | | | Decal, Primer |
| | 33323 | | Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| /21 | 730226 | ç | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | <u> </u> | |

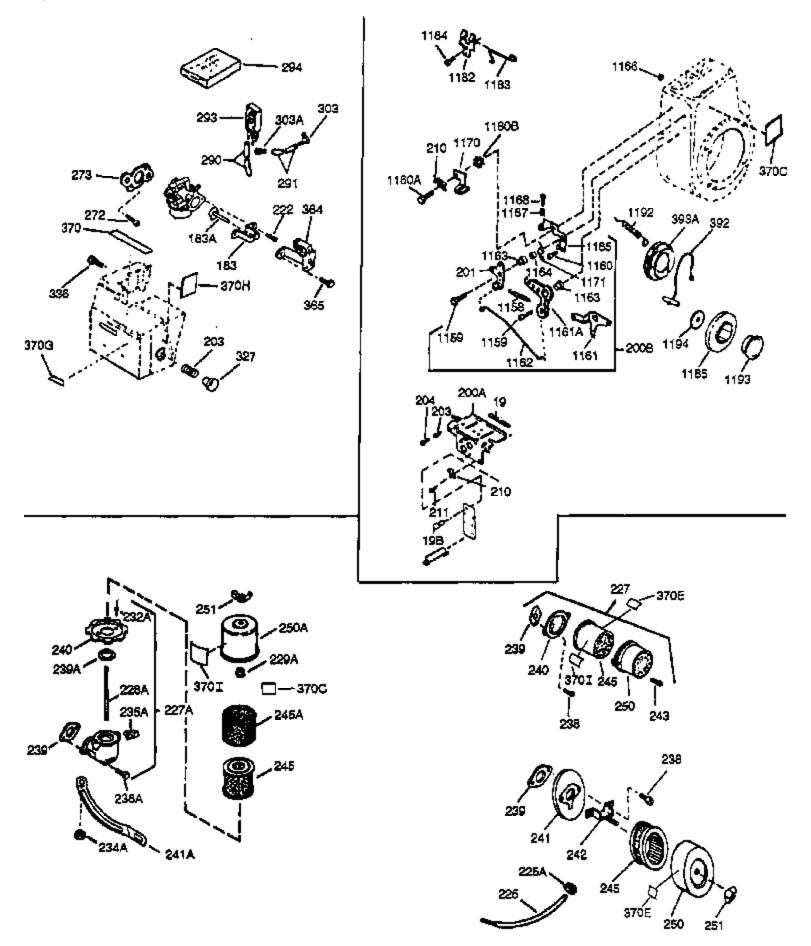

| Ref # | Part Number Qty | Description |
|-------------|-----------------|--|
| 37A | 30322 | Nut & Lockwasher, 8-32 |
| 129 | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 34587 | Bracket, Choke |
| | 730152 | Control Bracket (Incl.1158-1171)(As r eq.) |
| | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| 204 222A | | • |
| | | Pop Rivet (Can be purchased locally) |
| | 28820 | Screw, 10-32 x 1/2" |
| 221 | 730127 | Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as required) |
| | 35056 | Muffler |
| 285A | 33662 | Hub & Screen Assy. |
| 290 | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | Fuel Line (Braided 32")(80cm)(As required) |
| 291 | 30705 | Fuel Line (Braided 16")(40cm)(As required) |
| | 33715 | Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps |
| | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | (3000 series) repair kit is still available. The 35791 repair k |
| | | is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pump |
| 201 | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | (3000 series) repair kit is still available. The 35791 repair k |
| | | |
| | | is used with the 35813 and 35800 fuel pumps. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use a |
| | | required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| 0011 | 0.210 | as required) (1.5" I.D.) |
| | | |
| | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 32958 | Fitting, Fuel |
| 336 | 650765 | Screw, 10-32 x 1/2" |
| 337 | 35058 | Cover, Carburetor |
| | 31291 | Plug, Cover |
| | 33377 | Bracket, Carburetor cover mtg. |
| | 650767 | Screw, 8-32 x 27/64" |
| | 34346 | Decal, Instruction |
| | 35274 | Decal, Instruction |
| | 34679 | Decal, Choke |
| | | • |
| | 34144 | Decal, Primer |
| | 34414 | Decal, Warning |
| | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | Muffler Optional |
| 1159 | 30312 | Screw, 10-32 x 1/2" |
| | 28820 | Screw, 10-32 x 1/2" |
| 1160 | 20020 | |
| | 27070 | Lockwasher |

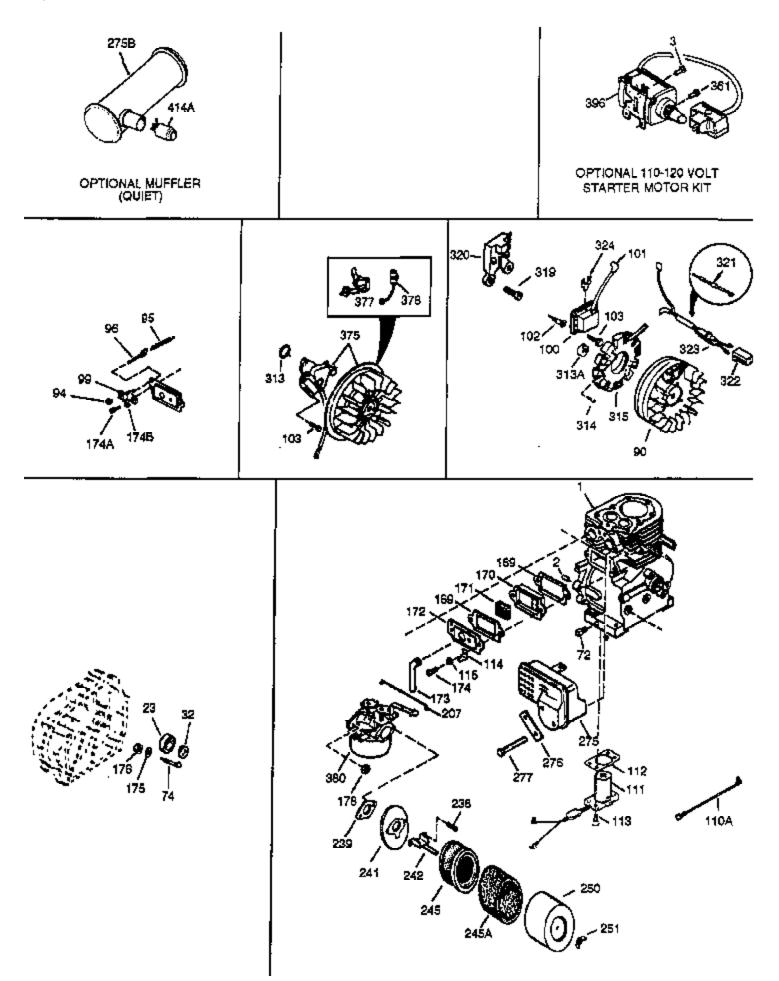

| Ref # | Part Number Q | ty Description |
|--------------|-----------------|---|
| 1 | 34922A | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| 2 | 27652 | Pin, Dowel |
| 3 | 650820 | Screw, 1/4-20 x 1/2" |
| 37A | 30322 | Nut & Lockwasher, 8-32 |
| | 27642 | Plug, Oil drain |
| | 610118 | Cover, Spark plug |
| | 650516 | Screw, 1/4-20 x 1-1/8" |
| | | |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as required) |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 27896A | * Gasket, Breather |
| 170 | 28423 | Body, Breather |
| 171 | 28424 | Element, Breather |
| 172 | 28425 | Cover, Breather |
| 173 | 35350 | Tube, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 29752 | Nut & Lockwasher, 1/4-28 |
| | 33878 | Link, Governor lever-to-throttle |
| 2207 222A | 55570 | Pop Rivet (Can be purchased locally) |
| | 25056 | Muffler |
| | 35056 | |
| 275B | 391026 | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| | | mufflercan be used on any model.) |
| 276 | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| | 650729 | Screw, $5/16-18 \times 3-3/16$ " (Use as required) |
| | 651002 | |
| | | Screw, 5/16-18 x 4-1/4" (Use as required) |
| | 33662 | Hub & Screen Assy. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| | | |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 201 4 | 25255 | Fuel Can (Dad Plantia)(1.75" D) |
| | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33876 | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 35058 | Cover, Carburetor |
| | 31291 | Plug, Cover |
| 370D | 34144 | Decal, Primer |
| 375 | 610982 | Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The |
| | | complete magneto is not available as an assembly. |
| | | Themagneto number is shown for reference purpose only. |
| | | Order component parts individually, as shown in parts list. |
| | | (Refer to Division 5, Section B, page 36 for breakdown or |
| | | Fiche 18B, Grid F-3 |
| | | |
| 377 | 30547A | Breaker Points (Use with Std. point i gn.) |
| 378 | 610767A | Condenser |
| | 632110 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | page 168 for breakdown or Fiche18B, Grid E-9) |
| | | |
| | 700000 | |
| | 730226 35824 | SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |