



| | Part Number | Qty | Description |
|-----|-------------|-----|---|
| 1 | 34922A | | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| 2 | 27652 | | Pin, Dowel |
| 3 | 650820 | | Screw, 1/4-20 x 1/2" |
| 4 | 30968 | | Nipple, Oil drain |
| | 30969 | | Cap, Oil drain |
| | 650494 | | Screw, 6-40 x 5/16" |
| | 30700 | | Yoke, Governor |
| | 30699C | | • |
| | | | Rod Assy., Governor (Incl. 15A & 15B) |
| | 33454 | | Governor Lever Assy. |
| | 29916 | | Clamp, Governor lever |
| | 650548 | | Screw, 8-32 x 5/16" |
| | 32630 | | Seal, Oil |
| 25 | 29536 | | Blower Housing Baffle (Without electric starter knockout) |
| | | | (Use as required) |
| 05 | 050504 | | |
| 25 | 35256A | | Blower Housing Baffle (With electric starter knockout) (Use |
| | | | as required) |
| 26 | 650561 | | Scrow 1/4-20 v 5/8" |
| | | | Screw, 1/4-20 x 5/8" Craphshaft (loc), 109, 8, 100) |
| | 33365B | | Crankshaft (Incl. 108 & 109) |
| | 29826 | | Screw, 10-32 x 3/4" |
| | 29918 | | Lockwasher, #8 E.T. |
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| 37 | 29216 | | Locknut, 10-32 |
| 38 | 29642 | | Ring, Retaining |
| 40 | 34860A | | Piston, Pin & Ring Set (Std.)(3-5/16") |
| | 34861A | | Piston, Pin & Ring Set (.010" OS) |
| | 34862A | | Piston, Pin & Ring Set (.020" OS) |
| | 34863 | | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| | | | |
| | 34864 | | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| | 34865 | | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 34866A | | Ring Set (Std.) (3-5/16" Bore) |
| 42 | 34867A | | Ring Set (.010" OS) |
| 42 | 34868A | | Ring Set (.020" OS) |
| 43 | 27888 | | Ring, Piston Pin retaining |
| 45 | 32591C | | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| 46 | 650662C | | Bolt, Connecting rod (2 pieces) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| | 34034 | | Lifter, Valve |
| | 34242 | | Dipper, Oil |
| | | | |
| | 34143 | | Camshaft (MCR) |
| | 33273A | | Extension, Blower housing |
| | 34126 | | Bracket, Grommet mounting |
| | 650760 | | Screw, 8-32 x 3/8" |
| 63 | 28545 | | Grommet, Plastic |
| 65 | 650128 | | Screw, 10-24 x 1/2" |
| 69 | 35262 | | * Gasket, Flange |
| 70 | 33367B | | Cover, Cylinder (Incl. 71, 75 & 80) |
| | 33368 | | Bushing, Crankshaft |
| | 27642 | | Plug, Oil drain |
| | 31950 | | Seal, Oil |
| | | | · |
| | 31845 | | Shaft, Mechanical governor |
| | 30590A | | Washer, Flat |
| | 30591 | | Gear Assy., Governor (Incl. 81) |
| | 30588A | | Spool, Governor |
| 84 | 29193 | | Ring, Retaining |
| 86 | 650833 | | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| | 650832 | | Screw, 1/4-20 x 1-11/16" (Use as required) |
| | 32589 | | Key, Flywheel |
| 00 | | | -,, , |


| | Ref # Part Number 92 650815 93 8116 101 610118 103 650489 108 29783 | Qty | Description Washer, Belleville Nut, Hex Cover, Spark plug Screw, 1/4-20 x 5/8" Pin, Crankshaft gear (Only serviceable when gear is pinned to crank.) |
|---|--|-----|--|
| | 109 33245 110 34240 119 34923A 120 34030A 125 27878A 125 27880A 126 34035 126 34036 127 650691 128 650690 129 650727 130 6021A | | Gear, Crankshaft Ground Wire * Gasket, Cylinder head Head, Cylinder Exhaust Valve (Std.) (Incl. 151) Exhaust Valve (1/32" OS) (Incl. 151) Intake Valve (Std.) (Incl. 151) Intake Valve (1/32" OS) (Incl. 151) Washer (Do not use with No. 6021A scr ew.) Washer, Belleville (Use as required) Screw, 5/16-18 x 1-3/4 (Use as required, but do notuse No. 650691 washer.) |
| | 130 650711 | | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A but discard 650691 washer.) |
| 1 | 130 650694A 131 650737 131 650738 31A 650713 133 650890 135 33636 139 33369 140 650836 49A 35862 150 27881 151 32581 169 27896A 170 28423 171 28424 172 28425 173 35350 174 650128 178 29752 182 30088A 183 34587 184 33263 185 33877 186 34667 200 34664 203 31342 204 650549 206 610973 207 33878 209 650821 210 27793 211 28942 | | Screw, 5/16-18 x 2" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8 (Use as required) Screw, 5/16-18 x 5/8" Washer, Internal Lock Resistor Spark Plug Bracket, Governor gear Screw, 10-24 x 1/2" Seal Assy., Intake valve Spring, Valve Cap, Lower valve spring * Gasket, Breather Body, Breather Element, Breather Cover, Breather Tube, Breather Screw, 10-24 x 1/2" Nut & Lockwasher, 1/4-28 Screw, 1/4-28 x 1" Bracket, Choke * Gasket, Carburetor Pipe, Intake Link, Governor lever Control Bracket (Incl.19,203, 204, 20 6 & 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. Link, Governor lever-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" |
| 2 | 219 34586 220 35438 22A 222 28820 | | Rod, Choke Knob, Control Pop Rivet (Can be purchased locally) Screw, 10-32 x 1/2" |
| | | | |


| Dof # | Part Number Q | Av Doscription |
|---------|-----------------|---|
| | 650378 | y Description Screw, Torx T-30, 5/16-18 x 1-1/8" |
| | 27915A | |
| | | * Gasket, Intake pipe |
| | 34822A | Blower Housing |
| | 650788 | Screw, 5/16-18 x 3/4" |
| | 29747B | Screw, 5/16-24 x 21/32" |
| | 33272B | Cover, Cylinder head |
| | 35056 | Muffler |
| | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| 277 | 650729 | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 281 | 33013 | Cover, Starter bubble |
| 282 | 650760 | Screw, 8-32 x 7/16" |
| 285A | 33662 | Hub & Screen Assy. |
| 287 | 29752 | Nut, 1/4-28 |
| 290 | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | Fuel Line (Braided 16")(40cm)(As required) |
| | 26460 | Fuel Line Clamp (Use as required) |
| | 32961 | Valve, Fuel shut-off |
| | 650665 | Screw, 1/4-15 x 7/8" |
| | 34156A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| 000 | 01100/1 | builtwith different size fuel inlet openings. Tanks with the |
| | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1/2" I.D. opening use fuel cap 35355. |
| | | 1-1/2 1.D. Opening use ruer cap 30000. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 00 17 (| 00002 | required) (1.5" I.D.) |
| | | . , , , |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 301A | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33893A | Oil Fill Tube |
| | 33590 | "O" Ring |
| | 34011A | Dipstick (Incl. 307) |
| | 35062 | Ignition Key |
| | 610973 | Terminal Assy. |
| | 35305 | Wire, Ground |
| | 650765 | Screw, 10-32 x 1/2" |
| | 35057A | Cover, Carburetor (Incl. 329) |
| | 28942 | Screw, Sems 10-32 x 3/8" |
| | 31291 | Plug, Cover |
| | 34154 | Plate, Upper fuel tank mtg. |
| | 34155 | Bracket, Lower fuel tank mtg. |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 650168 | Washer |
| | 34141 | Guard, Starter |
| | | |
| | 32576 650767 | Seal, Snow Guard |
| | 650767 | Screw, 8-32 x 27/64" |
| | 34686 | Decal, Name |
| | 35274 | Decal, Instruction |
| | 631021 | Inlet Needle, Seat & Clip Assy. |
| 380 | 632110 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | page 168 for breakdown or Fiche18B, Grid E-9) |


| Ref # Part Number | Qty Description |
|--|---|
| 390 590606 | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18B, Grid G-1) |
| 400 33279G 420 730225 421 730226 | * Gasket Set (Incl. items marked *) SAE 30 4-Cycle Engine Oil (Quart) SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 35824 | Muffler Optional |

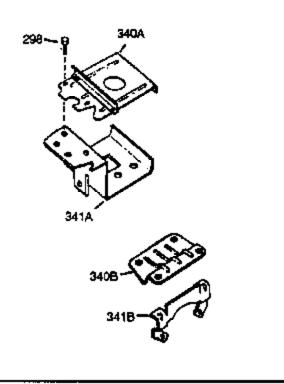





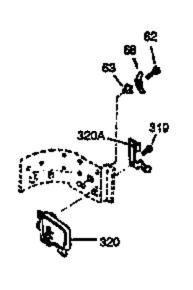


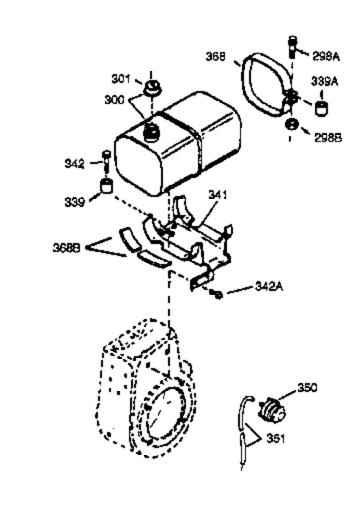











| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 37A | 30322 | • | Nut & Lockwasher, 8-32 |
| 62 | 650760 | | Screw, 8-32 x 3/8" |
| 63 | 28545 | | Grommet, Plastic |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 274 | 35865 | | Gasket, Exhaust |
| 275C | 35056 | | Muffler |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 285A | 33662 | | Hub & Screen Assy. |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 295 | 32961 | | Valve, Fuel shut-off |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 3∩1∆ | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 30171 | 4101410 | | I.D.) |
| | | | • |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | S .= | | as required) (1.5" I.D.) |
| | | | |
| | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 35305 | | Wire, Ground |
| | 35057A | | Cover, Carburetor (Incl. 329) |
| | 31291 | | Plug, Cover |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 570682 | | Primer Assy. |
| | 32180C | | Line, Primer |
| | 33323 | | Opt.Muffler Screen (Mini-Bike application) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | | Muffler Optional |
| | | | |

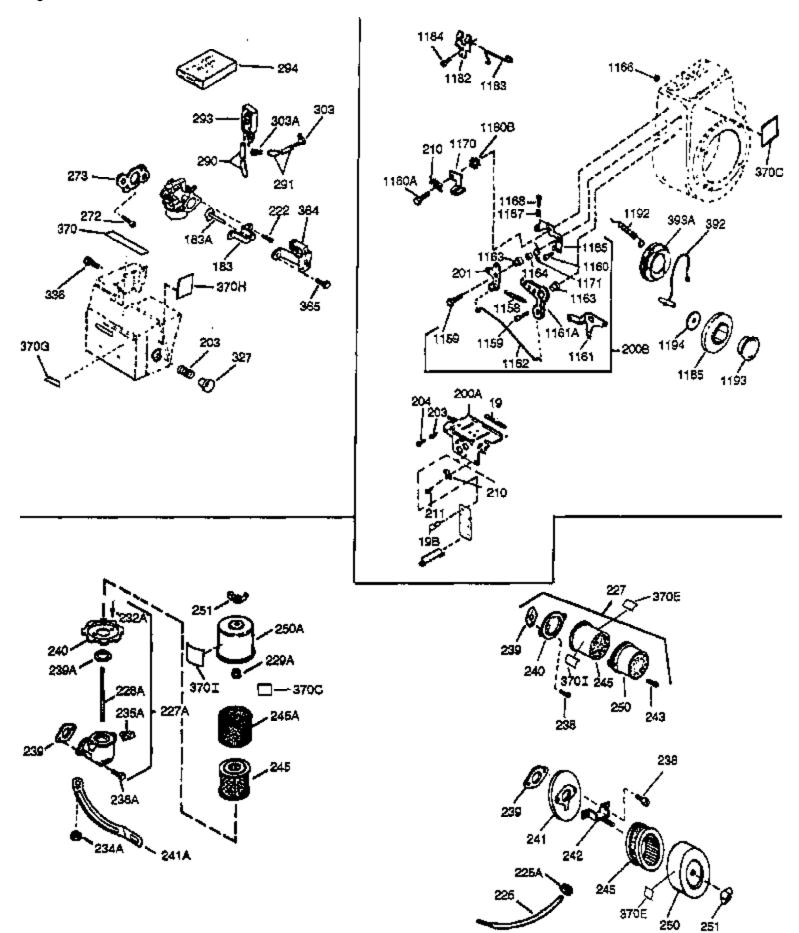

| Ref # | Part Number | Qty | Description |
|-------|----------------|-----|---|
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 183 | 34587 | | Bracket, Choke |
| 200B | 730152 | | Control Bracket (Incl.1158-1171)(As r eq.) |
| | 31342 | | Spring, Compression |
| | 650549 | | Screw, 5-40 x 7/16" |
| | 27793 | | Clip, Conduit |
| | 28942 | | Screw, 10-32 x 3/8" |
| | 28820 | | Screw, 10-32 x 1/2" |
| 222A | | | Pop Rivet (Can be purchased locally) |
| | 730127 | | Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as |
| | | | required) |
| | | | • • |
| | 35056 | | Muffler |
| | 33662 | | Hub & Screen Assy. |
| | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | | Fuel Line (Braided 16")(40cm)(As requ ired) |
| 293 | 33715 | | Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps |
| | | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps |
| 201 | 00701 | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| | | | • • |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | | I.D.) |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 00171 | 30002 | | required) (1.5" I.D.) |
| | | | |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 301∆ | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 32958 | | Fitting, Fuel |
| | 35305 | | Wire, Ground |
| | 650765 | | Screw, 10-32 x 1/2" |
| | 35057A | | Cover, Carburetor (Incl. 329) |
| | 31291 | | Plug, Cover |
| | 33377 | | Bracket, Carburetor cover mtg. |
| | 650767 | | Screw, 8-32 x 27/64" |
| | 35274 | | Decal, Instruction |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| | 30312 | | Screw, 10-32 x 1/2" |
| | 28820 | | |
| | 20020 27070 | | Screw, 10-32 x 1/2" Lockwasher |
| | | | |
| 1160 | 33816 | | Hub & Screen Assy. |
| | | | |

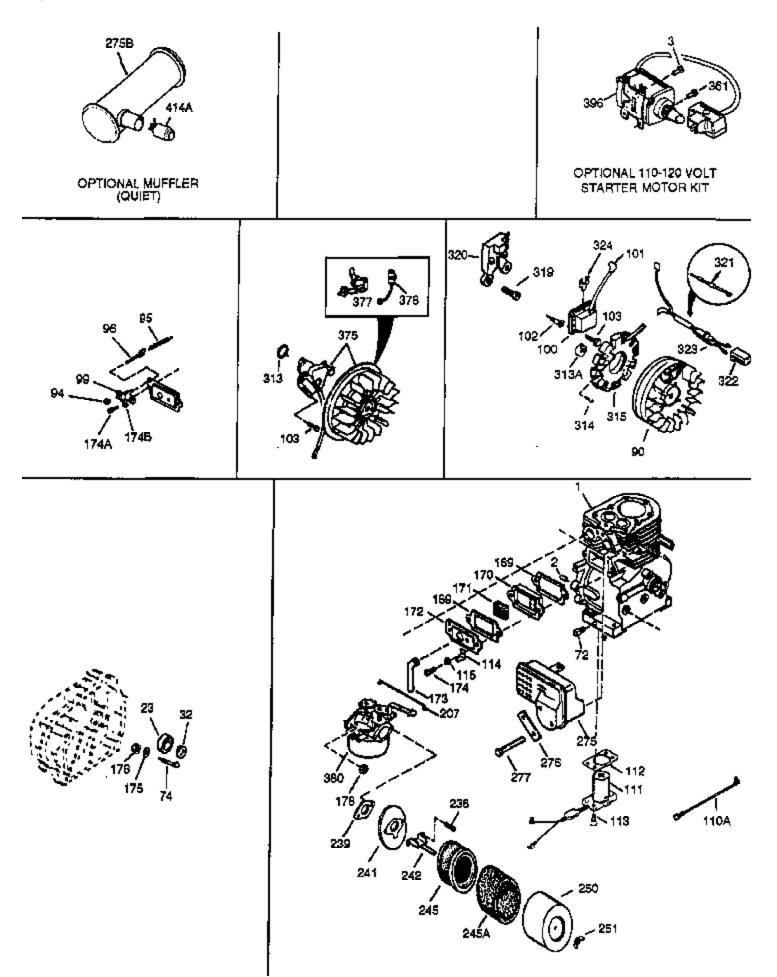

| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| 1 | 34922A | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | Pin, Dowel |
| | 650820 | Screw, 1/4-20 x 1/2" |
| | 30322 | Nut & Lockwasher, 8-32 |
| | 27642 | Plug, Oil drain |
| | | |
| | 610118 | Cover, Spark plug |
| | 650489 | Screw, 1/4-20 x 5/8" |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| 169 | 27896A | * Gasket, Breather |
| | 28423 | Body, Breather |
| | 28424 | Element, Breather |
| | 28425 | Cover, Breather |
| | 35350 | Tube, Breather |
| | | |
| | 650128 | Screw, 10-24 x 1/2" |
| | 29752 | Nut & Lockwasher, 1/4-28 |
| | 33878 | Link, Governor lever-to-throttle |
| 222A | | Pop Rivet (Can be purchased locally) |
| 275B | 391026 | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| | | mufflercan be used on any model.) |
| 2750 | 35056 | Muffler |
| | | |
| | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| | 650729 | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| | 651002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 285A | 33662 | Hub & Screen Assy. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| 204.4 | 0.404.0 | |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 301Δ | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33876 | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 35305 | Wire, Ground |
| | | · |
| | 35057A | Cover, Carburetor (Incl. 329) |
| | 31291 | Plug, Cover |
| 375 | 610848 | Magneto (w/ring gear for 120 Volt sta rter) NOTE: The |
| | | complete magneto is not available as an assembly. |
| | | Themagneto number is shown for reference purpose only. |
| | | Order component parts individually, as shown in parts list. |
| | | (Refer to Division 5, Section B, page 28 for breakdown or |
| | | Fiche 18B, Grid F-1 |
| 277 | 205474 | Broaker Points (Lice with Std. point i.gn.) |
| | 30547A | Breaker Points (Use with Std. point i gn.) |
| | 30548B | Condenser |
| 380 | 632110 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | page 168 for breakdown or Fiche18B, Grid E-9) |
| 421 | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | Muffler Optional |
| 722 | | manior optional |
| | | |