



| | | ty Description |
|-----|-----------------|---|
| 1 | 34922A | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| 2 | 27652 | Pin, Dowel |
| | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| | 650494 | Screw, 6-40 x 5/16" |
| | 30700 | |
| | | Yoke, Governor |
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| 20 | 32630 | Seal, Oil |
| 25 | 29536 | Blower Housing Baffle (Without electric starter knockout) |
| _ | | (Use as required) |
| | | |
| 25 | 35256A | Blower Housing Baffle (With electric starter knockout) (Use |
| | | as required) |
| | 050504 | |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 33810A | Crankshaft (Incl. 108 & 109) |
| 35 | 29826 | Screw, 10-32 x 3/4" |
| 36 | 29918 | Lockwasher, #8 E.T. |
| | 29216 | Locknut, 10-32 |
| | 30322 | Nut & Lockwasher, 8-32 |
| | 29642 | Ring, Retaining |
| | 29042 34860A | |
| | | Piston, Pin & Ring Set (Std.)(3-5/16") |
| | 34861A | Piston, Pin & Ring Set (.010" OS) |
| | 34862A | Piston, Pin & Ring Set (.020" OS) |
| 41 | 34863 | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| 41 | 34864 | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 | 34865 | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 34866A | Ring Set (Std.) (3-5/16" Bore) |
| | 34867A | Ring Set (.010" OS) |
| | | |
| | 34868A | Ring Set (.020" OS) |
| | 27888 | Ring, Piston Pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| 46 | 650662C | Bolt, Connecting rod (2 pieces) |
| 47 | 650662C | Bolt, Connecting rod (2 pieces) |
| 48 | 34034 | Lifter, Valve |
| | 34242 | Dipper, Oil |
| | 34143 | Camshaft (MCR) |
| | | |
| | 33273A | Extension, Blower housing |
| | 650128 | Screw, 10-24 x 1/2" |
| | 35262 | * Gasket, Flange |
| 70 | 33626B | Cyl.Cover (Incl.71,75,80,179,180,220, 221) |
| 72 | 27642 | Plug, Oil drain |
| | 33625 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| | 30590A | |
| | | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| 86 | 650833 | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| | 650832 | Screw, 1/4-20 x 1-11/16" (Use as required) |
| | 32589 | Key, Flywheel |
| | | |
| | 650815 | Washer, Belleville |
| | 8116 | Nut, Hex |
| | 650489 | Screw, 1/4-20 x 5/8" |
| 108 | 29783 | Pin, Crankshaft gear (Only serviceable when gear is pinned |
| | | to crank.) |
| | 00045 | · |
| 109 | 33245 | Gear, Crankshaft |
| | | |

| | | / Description |
|-------------|-----------|---|
| 119 | 34923A | * Gasket, Cylinder head |
| 120 | 34030A | Head, Cylinder |
| | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | Intake Valve (Std.) (Incl. 151) |
| | | |
| | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| | 650691 | Washer (Do not use with No. 6021A scr ew.) |
| | 650690 | Washer, Belleville (Use as required) |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 130 | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse No. |
| | | 650691 washer.) |
| 130 | 650711 | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A |
| 100 | | but discard 650691 washer.) |
| 100 | 07000 / 4 | · |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| 133 | 650890 | Washer, Internal Lock |
| | 33636 | Resistor Spark Plug |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 35862 | Seal Assy., Intake valve |
| | 27881 | |
| | | Spring, Valve |
| | 32581 | Cap, Lower valve spring |
| | 27896A | * Gasket, Breather |
| | 28423 | Body, Breather |
| | 28424 | Element, Breather |
| 172 | 28425 | Cover, Breather |
| 173 | 35350 | Tube, Breather |
| 174 | 650128 | Screw, 10-24 x 1/2" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| | 30088A | Screw, 1/4-28 x 1" |
| | 33263 | * Gasket, Carburetor |
| | 34707 | Pipe, Intake |
| | 33878 | Link, Governor lever-to-throttle |
| 207 222A | 55070 | |
| | 050030 | Pop Rivet (Can be purchased locally) |
| | 650378 | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| | 27915A | * Gasket, Intake pipe |
| | 33269A | Cover, Air cleaner |
| | 33375D | Blower Housing (For electric starter) |
| | 650788 | Screw, 5/16-18 x 3/4" |
| 262 | 29747B | Screw, 5/16-24 x 21/32" |
| 265 | 33272B | Cover, Cylinder head |
| | 33280A | Muffler |
| | 31588 | Plate, Muffler locking |
| | 35741 | Plate, Muffler locking |
| | 650729 | Screw, 5/16-18 x 3-3/16" (Use as required) |
| | 651002 | |
| | | Screw, 5/16-18 x 4-1/4" (Use as required) |
| | 33662 | Hub & Screen Assy. |
| | 29752 | Nut, 1/4-28 |
| | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | Fuel Line (Braided 32")(80cm)(As requ ired) |
| 291 | 30705 | Fuel Line (Braided 16")(40cm)(As required) |
| 292 | 26460 | Fuel Line Clamp (Use as required) |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| | | |


| Ref # | Part Number | Qty Description |
|---|---|---|
| 300 | 34156A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use as required) (1.5" I.D.) |
| 305 307 310 338A 340 341 342 361 370 370 370 370A 379 | 35355 33893A 33590 34011A 31291 34154 34155 650561 30063 34346 35274 34686 631021 632242 | Fuel Cap (Red Plastic)(1.75" I.D.) Oil Fill Tube "O" Ring Dipstick (Incl. 307) Plug, Cover Plate, Upper fuel tank mtg. Bracket, Lower fuel tank mtg. Screw, 1/4-20 x 5/8" Screw, Torx T-30, 1/4-20 x 1/2" Decal, Instruction Decal, Instruction Decal, Instruction Decal, Name Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page A4-4 for breakdown or Fiche 18B, Grid D-3) |
| 420 421 | 33279G 730225 730226 35824 | * Gasket Set (Incl. items marked *) SAE 30 4-Cycle Engine Oil (Quart) SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |

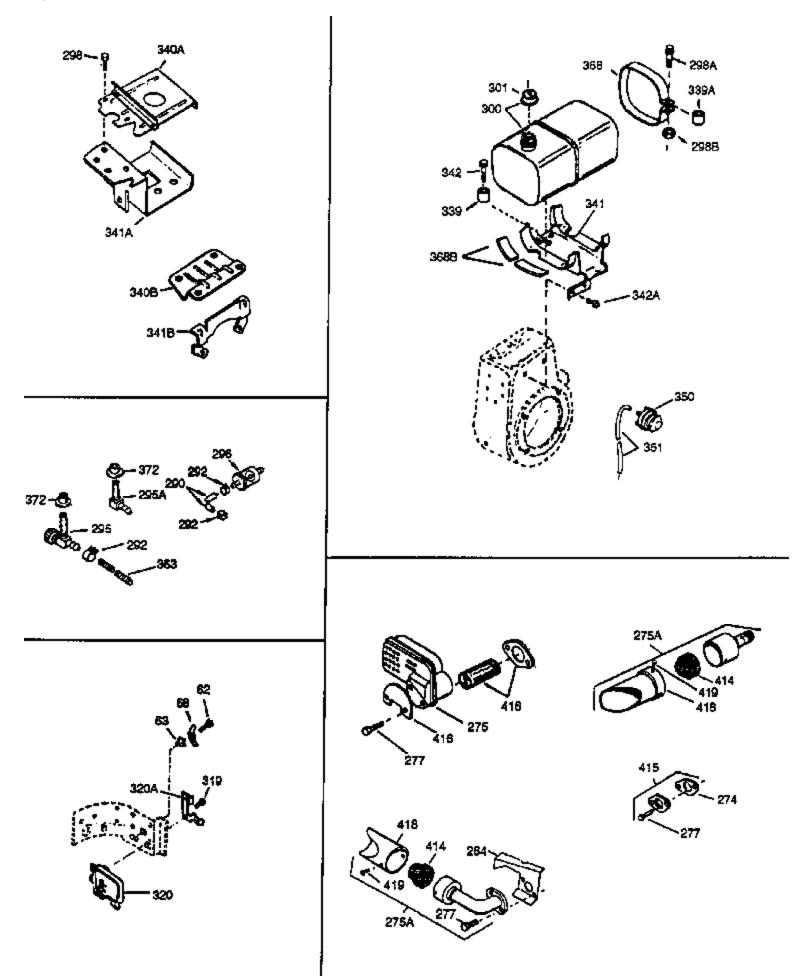

| | | y Description |
|------|---------|---|
| | 30322 | Nut & Lockwasher, 8-32 |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | Pop Rivet (Can be purchased locally) |
| | 33269A | Cover, Air cleaner |
| | 35865 | Gasket, Exhaust |
| | 33280A | Muffler |
| | 650729 | Screw, 5/16-18 x 3-3/16" (Use as required) |
| | 651002 | Screw, 5/16-18 x 4-1/4" (Use as required) |
| | 33662 | Hub & Screen Assy. |
| | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | Fuel Line (Braided 32")(80cm)(As required) |
| | 26460 | Fuel Line Clamp (Use as required) |
| | 650665 | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | builtwith different size fuel inlet openings. Tanks with the |
| | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 3014 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 301A | 5005Z | required) (1.5" I.D.) |
| | | |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 301A | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 31291 | Plug, Cover |
| | 34155 | Bracket, Lower fuel tank mtg. |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 33323 | Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | Cover & Tube, Muffler (use as require d) |
| | 650578 | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | Muffler Optional |
| | | .1 |

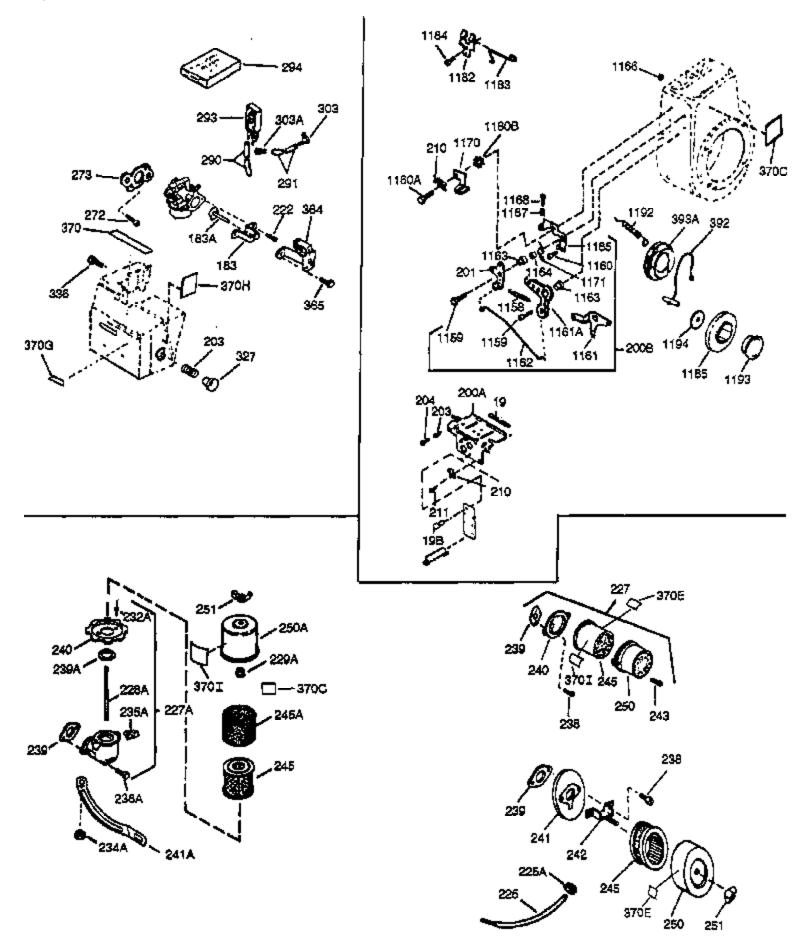

| Ref # | Part Number (| Qty Description |
|--|---|---|
| 129 131 131 131A 200B 222A | 30322 650727 650737 650738 650713 730152 730127 | Nut & Lockwasher, 8-32 Screw, 5/16-18 x 1-3/4 (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8 (Use as required) Screw, 5/16-18 x 5/8" Control Bracket (Incl.1158-1171)(As r eq.) Pop Rivet (Can be purchased locally) Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as required) |
| 239 241 242 245 250B 251 285A 290 290 291 | 28820 27272A 33266 33267 33268 33269A 650513 33662 29774 30962 30705 33715 | Screw, 10-32 x 1/2" * Gasket, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Element, Air cleaner Cover, Air cleaner Nut, Wing 1/4-20 Hub & Screen Assy. Fuel Line (Braided 8-1/4")(21cm)(As r equired) Fuel Line (Braided 32")(80cm)(As required) Fuel Line (Braided 32")(80cm)(As required) Fuel Line (Braided 16")(40cm)(As required) Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps are replaced by 35813 and 35800 (WIP) pumps. The 33010 (3000 series) repair kit is still available. The 35791 repair kit is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps are replaced by 35813 and 35800 (WIP) pumps. The 33010 (3000 series) repair kit is still available. The 35791 repair kit is used with the 35813 and 35800 fuel pumps. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" I.D.) |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use as required) (1.5" I.D.) |
| 303 338A 370 370 421 422 1159 1160 1160 | 35355 32958 31291 34346 35274 730226 35824 30312 28820 27070 33816 | Fuel Cap (Red Plastic)(1.75" I.D.) Fitting, Fuel Plug, Cover Decal, Instruction Decal, Instruction SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional Screw, 10-32 x 1/2" Screw, 10-32 x 1/2" Lockwasher Hub & Screen Assy. |

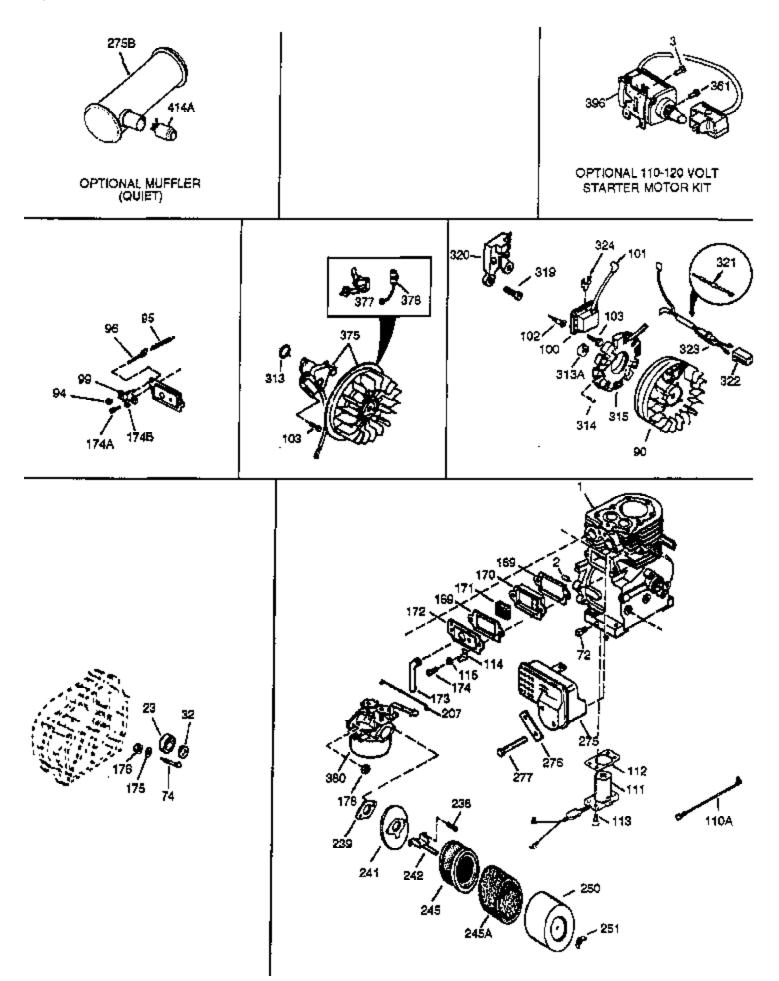

| Ref # | Part Number | Qty | Description |
|---------|-------------|-----|---|
| 1 | 34922A | | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| 2 | 27652 | | Pin, Dowel |
| | 33627 | | Bearing, Ball |
| | 33628 | | Washer, Thrust |
| | 30322 | | Nut & Lockwasher, 8-32 |
| | | | |
| | 27642 | | Plug, Oil drain |
| | 31855 | | Retainer, Bearing |
| | 33450 | | Lock Nut, 10-32 |
| | 30886A | | Spring, Governor bolt |
| 96 | 30845A | | Bolt, Governor adjusting |
| 103 | 650489 | | Screw, 1/4-20 x 5/8" |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 650713 | | Screw, 5/16-18 x 5/8" |
| | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| | 27896A | | * Gasket, Breather |
| | | | |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Breather |
| | 35350 | | Tube, Breather |
| 174 | 650128 | | Screw, 10-24 x 1/2" |
| 175 | 650778 | | Lockwasher |
| 176 | 650580 | | Nut, Lock |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 33878 | | Link, Governor lever-to-throttle |
| 222A | | | Pop Rivet (Can be purchased locally) |
| | 28820 | | Screw, 10-32 x 1/2" |
| | 27272A | | * Gasket, Air cleaner |
| | | | |
| | 33266 | | Bracket, Air cleaner |
| | 33267 | | Bracket, Air cleaner |
| | 33268 | | Element, Air cleaner |
| | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing 1/4-20 |
| 275 | 33280A | | Muffler |
| 275B | 391026 | | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| | | | mufflercan be used on any model.) |
| | | | |
| | 31588 | | Plate, Muffler locking |
| | 35741 | | Plate, Muffler locking |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as required) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as required) |
| 285A | 33662 | | Hub & Screen Assy. |
| | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | | I.D.) |
| | | | |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| 00 // (| 01210 | | as required) (1.5" I.D.) |
| | 05055 | | . , , , , |
| | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33876 | | Gasket, Stator (Used only on Std. poi nt ign.) |
| 338A | 31291 | | Plug, Cover |
| 361 | 30063 | | Screw, Torx T-30, 1/4-20 x 1/2" |
| | | | |

| Ref # | Part Number | Qty | Description |
|-------|-----------------------------|-----|--|
| 375 | 610972 | | Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The complete magneto is not available as an assembly. Themagneto number is shown for reference purpose only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18B, Grid F-3 |
| 378 | 30547A 610767A 632242 | | Breaker Points (Use with Std. point i gn.) Condenser Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page A4-4 for breakdown or Fiche 18B, Grid D-3) |
| | 730226 35824 | | SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |