




| | D. I.M. J. O. | D 10 |
|-----|---------------|---|
| | | y Description |
| | 34922A | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | Pin, Dowel |
| 15 | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| 15B | 650494 | Screw, 6-40 x 5/16" |
| | 30700 | Yoke, Governor |
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | | · |
| | 650548 | Screw, 8-32 x 5/16" |
| | 32630 | Seal, Oil |
| 25 | 35256A | Blower Housing Baffle (With electric starter knockout) (Use |
| | | as required) |
| OF. | 25226 | Doffle Dlover haveing |
| | 35326 | Baffle, Blower housing |
| 25 | 29536 | Blower Housing Baffle (Without electric starter knockout) |
| | | (Use as required) |
| 26 | 650561 | Sorow 1/4 20 v E/0" |
| | | Screw, 1/4-20 x 5/8" |
| | 35207 | Crankshaft (Incl. 108 & 109) |
| | 29826 | Screw, 10-32 x 3/4" |
| 36 | 29918 | Lockwasher, #8 E.T. |
| 37 | 29216 | Locknut, 10-32 |
| 37A | 30322 | Nut & Lockwasher, 8-32 |
| | 29642 | Ring, Retaining |
| | 34860A | Piston, Pin & Ring Set (Std.)(3-5/16") |
| | | |
| | 34861A | Piston, Pin & Ring Set (.010" OS) |
| | 34862A | Piston, Pin & Ring Set (.020" OS) |
| 41 | 34863 | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| 41 | 34864 | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 | 34865 | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 34866A | Ring Set (Std.) (3-5/16" Bore) |
| | 34867A | Ring Set (0.10" OS) |
| | | |
| | 34868A | Ring Set (.020" OS) |
| | 27888 | Ring, Piston Pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 46, 47 & 49) |
| 46 | 650662C | Bolt, Connecting rod (2 pieces) |
| 47 | 650662C | Bolt, Connecting rod (2 pieces) |
| 48 | 34034 | Lifter, Valve |
| | 34242 | Dipper, Oil |
| | 34143 | Camshaft (MCR) |
| | 33273A | Extension, Blower housing |
| | 650760 | |
| | | Screw, 8-32 x 3/8" |
| | 28545 | Grommet, Plastic |
| | 650128 | Screw, 10-24 x 1/2" |
| | 35262 | * Gasket, Flange |
| 70 | 33367B | Cover, Cylinder (Incl. 71, 75 & 80) |
| 71 | 33368 | Bushing, Crankshaft |
| 72 | 27642 | Plug, Oil drain |
| 75 | 31950 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| | | · · · · · · · · · · · · · · · · · · · |
| | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| 84 | 29193 | Ring, Retaining |
| 86 | 650833 | Screw, 1/4-20 x 1-3/16 (Use as requir ed) |
| | 650832 | Screw, 1/4-20 x 1-11/16" (Use as required) |
| | 32589 | Key, Flywheel |
| | 611091 | Flywheel (w/ring gear) |
| | | |
| | 650815 | Washer, Belleville |
| 93 | 8116 | Nut, Hex |


| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| | 35135 | Solid State Assy. |
| | 27276 | Cover, Spark plug |
| | 650872 | Stud, Solid state mounting |
| | 650814 | Screw, Torx T-15, 10-24 x 1" |
| | | |
| 106 | 29783 | Pin, Crankshaft gear (Only serviceable when gear is pinned |
| | | to crank.) |
| 109 | 33245 | Gear, Crankshaft |
| 110 | 35183 | Wire, Ground |
| 119 | 34923A | * Gasket, Cylinder head |
| 120 | 34030A | Head, Cylinder |
| | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | Intake Valve (Std.) (Incl. 151) |
| | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| | 650691 | Washer (Do not use with No. 6021A scr ew.) |
| | 650690 | Washer, Belleville (Use as required) |
| | 650727 | Screw, 5/16-18 x 1-3/4 (Use as required) |
| | | |
| 130 | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse No. |
| | | 650691 washer.) |
| 130 | 650711 | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A |
| | | but discard 650691 washer.) |
| 130 | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | • , |
| | | Screw, 1/4-20 x 5/8 (Use as required) |
| | 650713 | Screw, 5/16-18 x 5/8" |
| | 650890 | Washer, Internal Lock |
| | 30747 | Clip, Spark plug shorting |
| | 33636 | Resistor Spark Plug |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 35862 | Seal Assy., Intake valve |
| | 27881 | Spring, Valve |
| | 32581 | Cap, Lower valve spring |
| | 27896A | * Gasket, Breather |
| 170 | 28423 | Body, Breather |
| 171 | 28424 | Element, Breather |
| 172 | 28425 | Cover, Breather |
| 173 | 35350 | Tube, Breather |
| 174 | 650128 | Screw, 10-24 x 1/2" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| 182 | 30088A | Screw, 1/4-28 x 1" |
| | 33263 | * Gasket, Carburetor |
| | 34707 | Pipe, Intake |
| | 33878 | Link, Governor lever-to-throttle |
| 222A | | Pop Rivet (Can be purchased locally) |
| | 650378 | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| | 27915A | * Gasket, Intake pipe |
| | 33269A | Cover, Air cleaner |
| | 33375D | Blower Housing (For electric starter) |
| | 650788 | Screw, 5/16-18 x 3/4" |
| | 29747B | Screw, 5/16-24 x 21/32" |
| | | · |
| | 33272B | Cover, Cylinder head |
| | 35741 | Plate, Muffler locking |
| | 650729 | Screw, 5/16-18 x 3-3/16" (Use as required) |
| | 651002 | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 281 | 33013 | Cover, Starter bubble |


| Rof # | Part Number Qty | Description |
|-------|-----------------|--|
| | 650760 | Screw, 8-32 x 7/16" |
| | 32125 | Cup, Starter |
| | 35446 | Screen, Starter |
| | 29752 | Nut, 1/4-28 |
| | 29774 | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | Fuel Line (Braided 32)(600m)(As required) Fuel Line (Braided 16")(40cm)(As required) |
| | 26460 | |
| | | Fuel Line Clamp (Use as required) |
| | 650665 | Screw, 1/4-15 x 7/8" First Tools (loc) 202 8 204) NOTE: Thoos tools were |
| 300 | 34156A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | builtwith different size fuel inlet openings. Tanks with the |
| | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | I.D.) |
| 004 A | 20000 | |
| 301A | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | required) (1.5" I.D.) |
| 301A | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | as required) (1.5" I.D.) |
| 201 / | 35355 | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 29673 | * Gasket, Oil filler |
| | 31297 | · |
| | 35941 | Dipstick (Incl. 307) |
| | | Dipstick (Incl. 306) |
| | 27625 | Oil Fill Plug (Incl. 312) |
| | 29673 | * Gasket, Oil filler plug |
| | 34246 | Clip, Ground wire |
| | 35392 31301 | Plug, Starter |
| | 31291 | Plug, Cover |
| | 34154 | Plate, Upper fuel tank mtg. |
| | 34155 | Bracket, Lower fuel tank mtg. |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 34346 | Decal, Instruction |
| | 35274 631031 | Decal, Instruction |
| | 631021 | Inlet Needle, Seat & Clip Assy. |
| 300 | 632242 | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| | | page A4-4 for breakdown or Fiche 18B, Grid D-3) |
| 390 | 590633 | Rewind Starter (Refer to Division 5, Section C, page 30 for |
| | | breakdown or Fiche 18B, Grid G-1) |
| 400 | 33279G | * Gasket Set (Incl. items marked *) |
| | 730225 | |
| | | SAE 30 4-Cycle Engine Oil (Quart) |
| | 730226 | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | Muffler Optional |

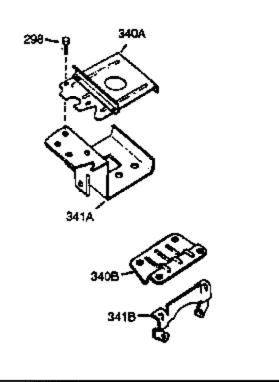

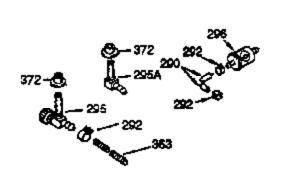



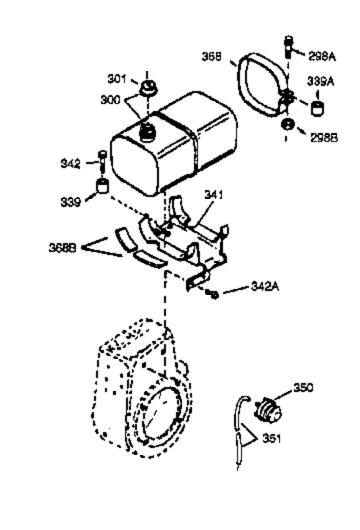


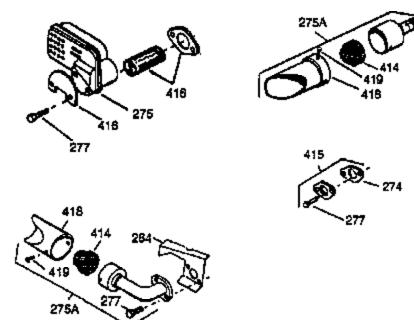

| Ref # | Part Number | Qty | Description |
|-------|----------------|-----|---|
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| 62 | 650760 | | Screw, 8-32 x 3/8" |
| 63 | 28545 | | Grommet, Plastic |
| 68 | 33356 | | Tab, Ground terminal |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 250B | 33269A | | Cover, Air cleaner |
| 274 | 35865 | | Gasket, Exhaust |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 00171 | | | I.D.) |
| 0014 | | | • |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 201Λ | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 29673 | | * Gasket, Oil filler |
| | 35941 | | Dipstick (Incl. 306) |
| | 31291 | | Plug, Cover |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33323 | | Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| 722 | 000 <u>2</u> 1 | | Manior Optional |



| Def II | Dort Mumber | O+ - | Description |
|---|-------------|------|---|
| | Part Number | Qty | Description |
| | 30322 | | Nut & Lockwasher, 8-32 |
| | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 200B | 730152 | | Control Bracket (Incl. 1158-1171)(As r eq.) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| | 730127 | | Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as |
| | | | required) |
| | | | • • |
| | 28820 | | Screw, 10-32 x 1/2" |
| | 27272A | | * Gasket, Air cleaner |
| 241 | 33266 | | Bracket, Air cleaner |
| 242 | 33267 | | Bracket, Air cleaner |
| 245 | 33268 | | Element, Air cleaner |
| 250B | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing 1/4-20 |
| | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| | 30705 | | Fuel Line (Braided 16")(40cm)(As required) |
| | 33715 | | Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps |
| 293 | 337 13 | | |
| | | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps |
| | | | are replaced by 35813 and 35800 (WIP) pumps. The 33010 |
| | | | (3000 series) repair kit is still available. The 35791 repair kit |
| | | | is used with the 35813 and 35800 fuel pumps. |
| | | | • • |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | | I.D.) |
| 201 / | 22022 | | Fuel Can (Red Plantia) (Sourt Registent Law Profile) (Llee ee |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| • | 0.2.0 | | as required) (1.5" I.D.) |
| | | | |
| | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| 303 | 32958 | | Fitting, Fuel |
| 306 | 29673 | | * Gasket, Oil filler |
| 310B | 35941 | | Dipstick (Incl. 306) |
| 327 | 35392 | | Plug, Starter |
| 338A | 31291 | | Plug, Cover |
| | 34346 | | Decal, Instruction |
| | 35274 | | Decal, Instruction |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| | 30312 | | Screw, 10-32 x 1/2" |
| | 28820 | | |
| | | | Screw, 10-32 x 1/2" |
| | 27070 | | Lockwasher |
| 1185 | 33816 | | Hub & Screen Assy. |
| | | | |

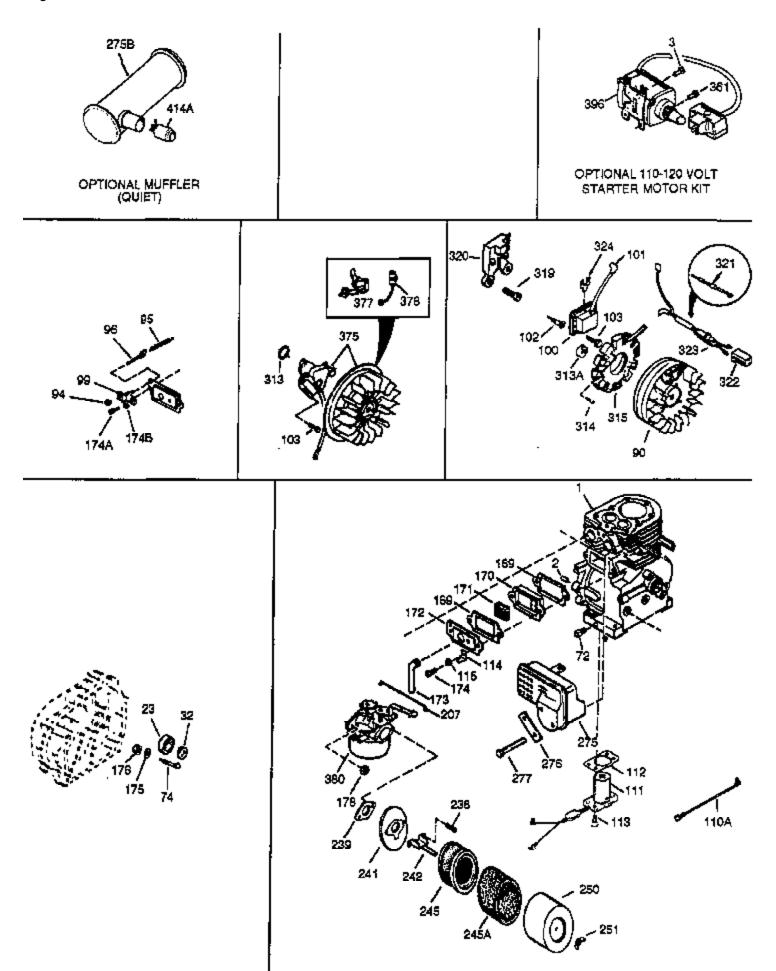

| Ref # | Part Number (| ∩tv | Description |
|-------|---------------|-----|---|
| | 34922A | αιу | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | | Pin, Dowel |
| | 30322 | | Nut & Lockwasher, 8-32 |
| | 27642 | | Plug, Oil drain |
| | | | <u> </u> |
| | 611091 | | Flywheel (w/ring gear) |
| | 33450 | | Lock Nut, 10-32 |
| | 30886A | | Spring, Governor bolt |
| | 30845A | | Bolt, Governor adjusting |
| | 35135 | | Solid State Assy. |
| | 27276 | | Cover, Spark plug |
| | 650872 | | Stud, Solid state mounting |
| 103 | 650814 | | Screw, Torx T-15, 10-24 x 1" |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 169 | 27896A | | * Gasket, Breather |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Breather |
| | 35350 | | Tube, Breather |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 33878 | | Link, Governor lever-to-throttle |
| 222A | 33070 | | Pop Rivet (Can be purchased locally) |
| | 28820 | | |
| | 27272A | | Screw, 10-32 x 1/2" * Cooket Air depart |
| | | | * Gasket, Air cleaner |
| | 33266 | | Bracket, Air cleaner |
| | 33267 | | Bracket, Air cleaner |
| | 33268 | | Element, Air cleaner |
| | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing 1/4-20 |
| 275B | 391026 | | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| | | | mufflercan be used on any model.) |
| 276 | 35741 | | Plate, Muffler locking |
| | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as required) |
| | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 30 IA | 10176 | | I.D.) |
| | | | • |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301Δ | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| 30 IA | 34210 | | as required) (1.5" I.D.) |
| | | | |
| 301A | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| 306 | 29673 | | * Gasket, Oil filler |
| 310B | 35941 | | Dipstick (Incl. 306) |
| | 33876 | | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 31291 | | Plug, Cover |
| | 30547A | | Breaker Points (Use with Std. point i gn.) |
| | 632242 | | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, |
| 550 | | | page A4-4 for breakdown or Fiche 18B, Grid D-3) |
| | | | , |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| 422 | 35824 | | Muffler Optional |
| | | | |