




| Ref # | Part Number C | Oty Description |
|-------|---------------|---|
| | 35371 | Cylinder (CI liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | Pin, Dowel |
| | 650494 | Screw, 6-40 x 5/16" |
| | | |
| | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| | 30700 | Yoke, Governor |
| | 33454 | Governor Lever Assy. |
| 17 | 29916 | Clamp, Governor lever |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| 20 | 35319 | Seal, Oil |
| | 29536 | Blower Housing Baffle (Without electric starter knockout) |
| | | (Use as required) |
| | | , |
| 25 | 35256A | Blower Housing Baffle (With electric starter knockout) (Use |
| | | as required) |
| 25 | 35326 | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 35420A | Crankshaft |
| | 29826 | Screw, 10-32 x 3/4" |
| | | • |
| | 29918 | Lockwasher, #8 E.T. |
| | 29216 | Locknut, 10-32 |
| | 30322 | Nut & Lockwasher, 8-32 |
| | 29642 | Ring, Retaining |
| 40 | 34860A | Piston, Pin & Ring Set (Std.)(3-5/16") |
| 40 | 34861A | Piston, Pin & Ring Set (.010" OS) |
| 40 | 34862A | Piston, Pin & Ring Set (.020" OS) |
| | 34863 | Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.43) |
| | 34864 | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| | 34865 | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | | • |
| | 34866A | Ring Set (Std.) (3-5/16" Bore) |
| | 34867A | Ring Set (.010" OS) |
| | 34868A | Ring Set (.020" OS) |
| | 27888 | Ring, Piston Pin retaining |
| 45 | 35373A | Connecting Rod |
| 46 | 650908 | Bolt, Connecting rod |
| 47 | 650882 | Connecting Rod Bolt (2 pcs. on early Specs.) |
| 48 | 34034 | Lifter, Valve |
| 49 | 35374 | Dipper, Oil |
| | 35375 | Camshaft (MCR) |
| | 33273A | Extension, Blower housing |
| | 650802 | Screw, 1/4-20 x 5/8" |
| | | · |
| | 650128 | Screw, 10-24 x 1/2" |
| | 35262 | * Gasket, Flange |
| | 33626B | Cyl.Cover (Incl.71,75,80,179,180,220, 221) |
| | 35377 | Bushing, Crankshaft |
| | 27642 | Plug, Oil drain |
| 75 | 33625 | Seal, Oil |
| 80 | 31845 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 35378 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | | |
| | 650833 | Screw, 1/4-20 x 1-3/16 (Use as required) |
| | 650832 | Screw, 1/4-20 x 1-11/16" (Use as requ ired) |
| | 32589 | Key, Flywheel |
| | 611094 | Flywheel (w/ring gear) (7 Amp) |
| 100 | 35135 | Solid State Assy. |
| 101 | 27276 | Cover, Spark plug |
| 102 | 650872 | Stud, Solid state mounting |
| | | |


| Ref # | Part Number | Qtv | Description |
|-------|-------------|-----|---|
| | 650814 | , | Screw, Torx T-15, 10-24 x 1" |
| | 29783 | | Pin, Crankshaft gear (Only serviceable when gear is pinned |
| 100 | 20100 | | to crank.) |
| | | | to crain.) |
| 109 | 33245 | | Gear, Crankshaft |
| | 34923A | | * Gasket, Cylinder head |
| | 34030A | | Head, Cylinder |
| | 27878A | | Exhaust Valve (Std.) (Incl. 151) |
| | | | |
| | 27880A | | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | | Intake Valve (Std.) (Incl. 151) |
| | 34036 | | Intake Valve (1/32" OS) (Incl. 151) |
| | 650691 | | Washer (Do not use with No. 6021A scr ew.) |
| 128 | 650690 | | Washer, Belleville (Use as required) |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 130 | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse No. |
| | | | 650691 washer.) |
| | | | , |
| 130 | 650711 | | Screw, 5/16-18 x 1-5/8 " (Use as required) (Can use 6021A |
| | | | but discard 650691 washer.) |
| 400 | CEOCO4A | | Coroux E/4C 10 x 0" /Llos on required |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 133 | 650890 | | Washer, Internal Lock |
| 134 | 30747 | | Clip, Spark plug shorting |
| 135 | 33636 | | Resistor Spark Plug |
| | 33369 | | Bracket, Governor gear |
| | 650836 | | Screw, 10-24 x 1/2" |
| | 35862 | | |
| | | | Seal Assy., Intake valve |
| | 27881 | | Spring, Valve |
| | 32581 | | Cap, Lower valve spring |
| | 27896A | | * Gasket, Breather |
| 170 | 28423 | | Body, Breather |
| 171 | 28424 | | Element, Breather |
| 172 | 28425 | | Cover, Breather |
| 173 | 35350 | | Tube, Breather |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 30088A | | Screw, 1/4-28 x 1" |
| | 33263 | | * Gasket, Carburetor |
| | 34707 | | • |
| | | | Pipe, Intake |
| | 33372 | | Link, Governor lever-to-bellcrank |
| | 34661 | | Link, Governor lever |
| | 34677 | | Control Bracket (Incl.19, 203, 204, 2 06, 209) |
| 203 | 31342 | | Spring, Compression |
| 204 | 650549 | | Screw, 5-40 x 7/16" |
| 207 | 33878 | | Link, Governor lever-to-throttle |
| 209 | 650821 | | Screw, 10-32 x 1/2" |
| | 32410 | | Knob, Speed control |
| 222A | | | Pop Rivet (Can be purchased locally) |
| | 650378 | | Screw, Torx T-30, 5/16-18 x 1-1/8" |
| | 27915A | | * Gasket, Intake pipe |
| | | | · · |
| | 33269A | | Cover, Air cleaner |
| | 33375D | | Blower Housing (For electric starter) |
| | 650788 | | Screw, 5/16-18 x 3/4" |
| | 29747B | | Screw, 5/16-24 x 21/32" |
| 265 | 33272B | | Cover, Cylinder head |
| 275 | 33280A | | Muffler |
| | | | |


| 276 276 277 277 285 286 287 290 290 291 292 | Part Number 31588 35741 650729 651002 35287 35446 29752 29774 30962 30705 26460 650665 34186A | Qty | Plate, Muffler locking Plate, Muffler locking Screw, 5/16-18 x 3-3/16" (Use as requ ired) Screw, 5/16-18 x 4-1/4" (Use as requi red) Cup, Starter Screen, Starter Nut, 1/4-28 Fuel Line (Braided 8-1/4")(21cm)(As r equired) Fuel Line (Braided 32")(80cm)(As requ ired) Fuel Line (Braided 16")(40cm)(As requ ired) Fuel Line Clamp (Use as required) Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 35355. |
|---|---|-----|--|
| | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" I.D.) |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use as required) (1.5" I.D.) |
| 305 308 310 316 327 338A 340 341 342 361 370B 370A 370 370 379 380 | 35355 35554 35540 36205 611097 35392 31291 34154 34155 650561 30063 33962 34686 34346 35274 631021 632242 | | Fuel Cap (Red Plastic)(1.75" I.D.) Oil Fill Tube Clip, Fill tube Dipstick Alternator Coil (7 Amp, D.C.)(Incl.32 2 & 323) Plug, Starter Plug, Cover Plate, Upper fuel tank mtg. Bracket, Lower fuel tank mtg. Screw, 1/4-20 x 5/8" Screw, Torx T-30, 1/4-20 x 1/2" Decal, Control Decal, Name Decal, Instruction Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page A4-4 for breakdown or Fiche 18B, Grid D-3) Rewind Starter (Refer to Division 5, Section C, page 30 for |
| | 590633 35763A | | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18B, Grid G-1) Electric Starter Motor (12 Volt) (Refer to service number stamped on end cap of motor, or on decal, for identification. Refer to Division 5, Section D for breakdown or Fiche 18B, Grid G-6) |
| 420 421 | 33279G 730225 730226 35824 | | * Gasket Set (Incl. items marked *) SAE 30 4-Cycle Engine Oil (Quart) SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |

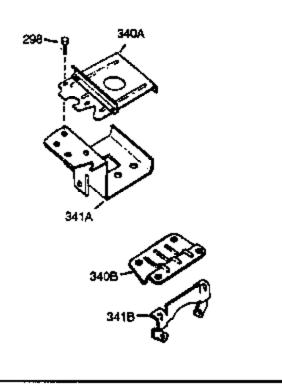








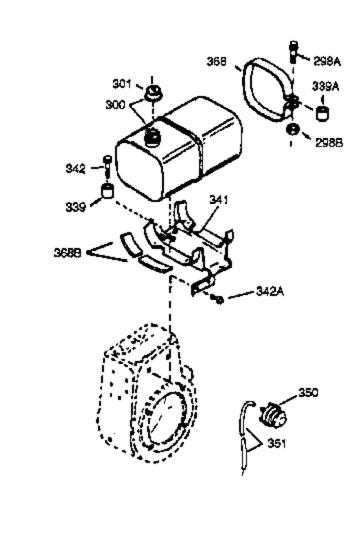











| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 37A | 30322 | | Nut & Lockwasher, 8-32 |
| 64 | 650802 | | Screw, 1/4-20 x 5/8" |
| 129 | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 250B | 33269A | | Cover, Air cleaner |
| 274 | 35865 | | Gasket, Exhaust |
| 275 | 33280A | | Muffler |
| 277 | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| 277 | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21cm)(As r equired) |
| 290 | 30962 | | Fuel Line (Braided 32")(80cm)(As required) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 300 | 34186A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | | builtwith different size fuel inlet openings. Tanks with the |
| | | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 3∩1∆ | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| 00171 | 4101416 | | I.D.) |
| | | | • |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| | | | required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 201 / | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 611097 | | Alternator Coil (7 Amp, D.C.)(Incl.32 2 & 323) |
| | 650874 | | Screw, 10-32 x 15/32" |
| | 611098 | | |
| | 31291 | | Regulator (7 Amp D.C.) Plug, Cover |
| | 34155 | | Bracket, Lower fuel tank mtg. |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33323 | | Opt.Muffler Screen (Mini-Bike applica tion) |
| | 730130 | | Kit, Exhaust adapter (Incl. 274 & 277) |
| | 33700 | | Cover & Tube, Muffler (use as require d) |
| | 650578 | | Screw, 8-18 x 3/8" (use as required) |
| | 730226 | | SAE 5W30 4-Cycle Engine Oil (Quart) |
| | 35824 | | Muffler Optional |
| 422 | JJU24 | | ividilici Optioriai |

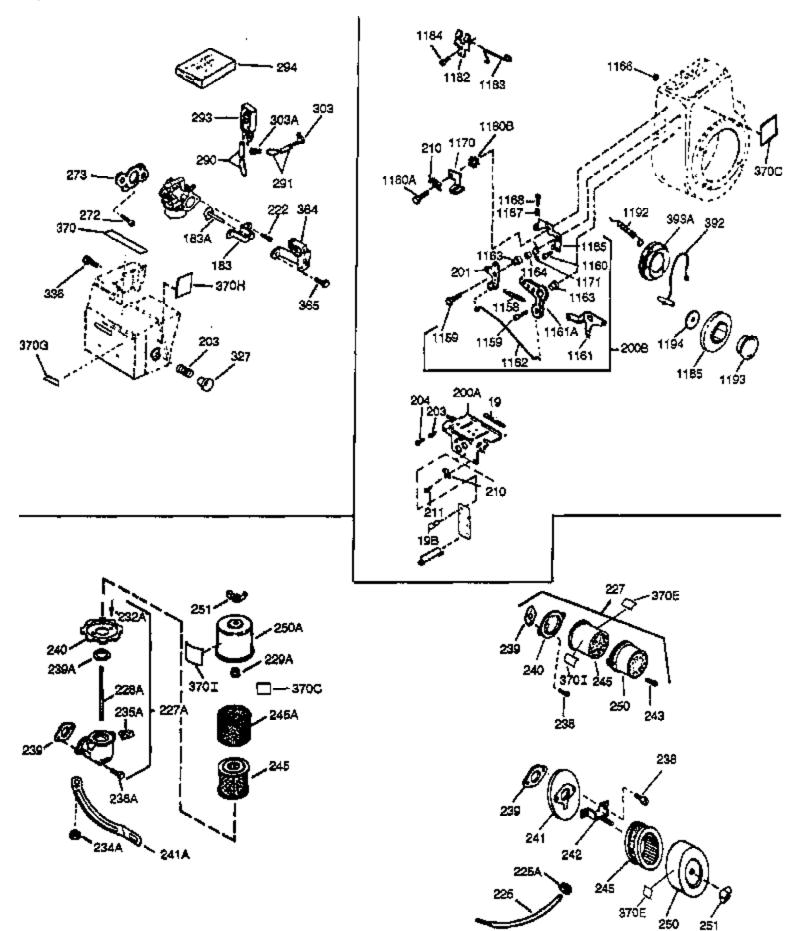

| Ref # | Part Number | Qty | Description |
|---|---|-----|--|
| 64 129 131 131 131A 200B 203 204 222A | 30322 650802 650727 650737 650738 650713 730152 31342 650549 | | Nut & Lockwasher, 8-32 Screw, 1/4-20 x 5/8" Screw, 5/16-18 x 1-3/4 (Use as requir ed) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8 (Use as required) Screw, 5/16-18 x 5/8" Control Bracket (Incl.1158-1171)(As r eq.) Spring, Compression Screw, 5-40 x 7/16" Pop Rivet (Can be purchased locally) Air Cleaner Ass'y. (Incl. 238, 239, 242, 246, 250) (Use as required) |
| 239 241 242 245 250B 251 290 290 291 | 28820 27272A 33266 33267 33268 33269A 650513 29774 30962 30705 33715 | | Screw, 10-32 x 1/2" * Gasket, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Element, Air cleaner Cover, Air cleaner Nut, Wing 1/4-20 Fuel Line (Braided 8-1/4")(21cm)(As r equired) Fuel Line (Braided 32")(80cm)(As required) Fuel Line (Braided 16")(40cm)(As required) Impulse Fuel Pump NOTE: 34385 and 33715 (WIP)pumps are replaced by 35813 and 35800 (WIP) pumps. The 33010 (3000 series) repair kit is still available. The 35791 repair kit is used with the 35813 and 35800 fuel pumps. |
| 294 | 35791 | | Fuel Pump Repair Kit NOTE: 34385 and 33715 (WIP)pumps are replaced by 35813 and 35800 (WIP) pumps. The 33010 (3000 series) repair kit is still available. The 35791 repair kit is used with the 35813 and 35800 fuel pumps. |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" I.D.) |
| 301A | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as required) (1.5" I.D.) |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use as required) (1.5" I.D.) |
| 303 316 327 338A 370 370 421 422 1159 1160 1160 | 35355 32958 611097 35392 31291 34346 35274 730226 35824 30312 28820 27070 33816 | | Fuel Cap (Red Plastic)(1.75" I.D.) Fitting, Fuel Alternator Coil (7 Amp, D.C.)(Incl.32 2 & 323) Plug, Starter Plug, Cover Decal, Instruction Decal, Instruction SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional Screw, 10-32 x 1/2" Screw, 10-32 x 1/2" Lockwasher Hub & Screen Assy. |

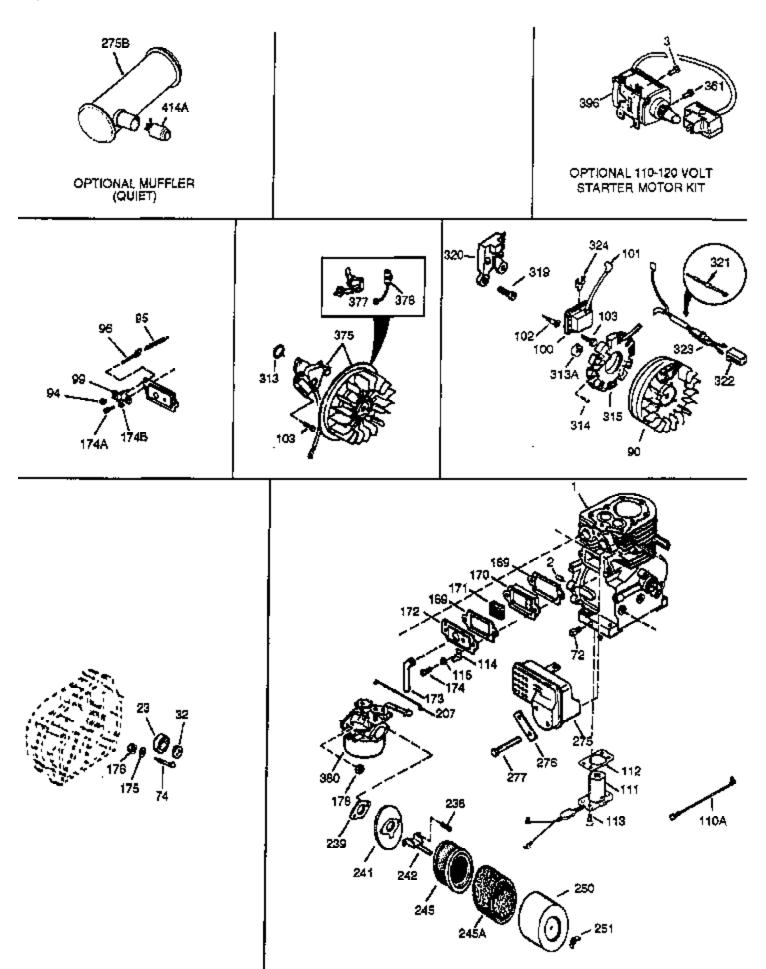

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| | 35371 | Qty | Cylinder (Cl liner)(3-5/16")(Incl.2,2 0 & 72) |
| | 27652 | | Pin, Dowel |
| | 33627 | | Bearing, Ball |
| | 33628 | | Washer, Thrust |
| | 30322 | | Nut & Lockwasher, 8-32 |
| | 650802 | | Screw, 1/4-20 x 5/8" |
| | 27642 | | Plug, Oil drain |
| | 31855 | | • |
| | | | Retainer, Bearing |
| | 611094 | | Flywheel (w/ring gear) (7 Amp) |
| | 35135 | | Solid State Assy. |
| | 27276 | | Cover, Spark plug |
| | 650872 | | Stud, Solid state mounting |
| | 650814 | | Screw, Torx T-15, 10-24 x 1" |
| | 650727 | | Screw, 5/16-18 x 1-3/4 (Use as requir ed) |
| | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, 1/4-20 x 5/8 (Use as required) |
| | 650713 | | Screw, 5/16-18 x 5/8" |
| | 27896A | | * Gasket, Breather |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Breather |
| 173 | 35350 | | Tube, Breather |
| 174 | 650128 | | Screw, 10-24 x 1/2" |
| 175 | 650778 | | Lockwasher |
| 176 | 650580 | | Nut, Lock |
| 178 | 29752 | | Nut & Lockwasher, 1/4-28 |
| 207 | 33878 | | Link, Governor lever-to-throttle |
| 222A | | | Pop Rivet (Can be purchased locally) |
| 238 | 28820 | | Screw, 10-32 x 1/2" |
| | 27272A | | * Gasket, Air cleaner |
| 241 | 33266 | | Bracket, Air cleaner |
| | 33267 | | Bracket, Air cleaner |
| | 33268 | | Element, Air cleaner |
| | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing 1/4-20 |
| | 33280A | | Muffler |
| | 391026 | | Muffler (Incl. 284, 284A & 416) (This spark arrester |
| 2.02 | 00.020 | | mufflercan be used on any model.) |
| | | | • • |
| | 31588 | | Plate, Muffler locking |
| | 35741 | | Plate, Muffler locking |
| | 650729 | | Screw, 5/16-18 x 3-3/16" (Use as requ ired) |
| | 651002 | | Screw, 5/16-18 x 4-1/4" (Use as requi red) |
| 301A | 410144B | | Fuel Cap (White Plastic)(Standard) (Use as required) (1.5" |
| | | | I.D.) |
| 301Δ | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (Use as |
| 30 IA | 33032 | | required) (1.5" I.D.) |
| | | | . , , , , |
| 301A | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (Use |
| | | | as required) (1.5" I.D.) |
| 204 / | 35355 | | Fuel Cap (Ped Plastic)(1.75" LD.) |
| | 35355 | | Fuel Cap (Red Plastic)(1.75" I.D.) |
| | 33876 | | Gasket, Stator (Used only on Std. poi nt ign.) |
| | 650873 | | Screw, 1/4-20 x 3/4" |
| | 611097 | | Alternator Coil (7 Amp, D.C.)(Incl.32 2 & 323) |
| | 650874 | | Screw, 10-32 x 15/32" |
| | 611098 | | Regulator (7 Amp D.C.) |
| | 610921 | | Connector, Body |
| 322 | 610824 | | Connector, Flat |
| | | | |

| Ref # | Part Number (| Qty | Description |
|-------|-----------------|-----|---|
| 323 | 610922 | | Terminal, Female |
| 338A | 31291 | | Plug, Cover |
| 361 | 30063 | | Screw, Torx T-30, 1/4-20 x 1/2" |
| 377 | 30547A | | Breaker Points (Use with Std. point i gn.) |
| 380 | 632242 | | Carburetor (Incl. 184 & 379) (Refer to Division 5, Section A, page A4-4 for breakdown or Fiche 18B, Grid D-3) |
| | 730226 35824 | | SAE 5W30 4-Cycle Engine Oil (Quart) Muffler Optional |