


Ref #	Part Number Qt	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
15A	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
		Screw, 8-32 x 5/16"
	650548	,
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33365B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
37A	30322	Locknut, Hex "Keps", 8-32
37	29216	Nut & Lockwasher, 10-32 "Keps"
38	29642	Ring, Retaining
40	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (3.10" OS)
	34334	e i
		Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
61	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-3/10"
		·
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650489	Screw, 1/4-20 x 5/8"
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
110	34240	Ground Wire

	5 (1)	
		Description
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
127A	26073	Washer, Flat (Use as required)
127A	650570	Washer, Flat (Use as required)
127	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
130/ (	002171	650691 washer)
131A	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, 1/4-20 x 5/8" (Use as required )
	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	33636	Resistor Spark Plug (RJ17LM)
		. ,
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
170	28423	Body, Breather
171	28424	Element, Breather
172	28425	Cover, Valve spring
173	35350	Tube, Breather
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
		·
	610973 27793	Terminal Assy. (Use as required) Clip, Conduit
		1.7
	28942	Screw, 10-32 x 3/8" Screw, Tory T 30, 5/46 18 x 4 1/9 "
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	34145	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
275C	35824	Muffler (Optional quiet muffler)
275	33280A	Muffler
	31588	Plate, Muffler locking
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
	33662	Hub & Screen Assy., Starter
2000	0000Z	TION & COLEGE MOSSY., CICITIES


	D (N)	B 1.0
		Description 4/4.60
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
290	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
000	0+100/ t	builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		. •
		1-1/2" I.D. opening use fuel cap 35355.
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
001	00002	I.D.)
		1.0.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
224	0=0==	5 10 (D 1 1 (1) (4 4 (D) 1 D)
	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A	Tube, Oil fill
306	33590	"O" Ring
310	34011A	Dipstick (Incl. 306)
325	29443	Clip, Fuel line (Use as required)
325	34246	Clip, Ground wire (Use as required)
	650765	Screw, 10-32 x 1/2"
	34666	Cover, Carburetor
	28942	Screw, 10-32 x 3/8"
		·
	34154	Plate, Fuel tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	34141	Guard, Starter
360	32576	Seal, Snow guard
364	33377	Bracket, Carburetor cover mounting
365	650767	Screw, 8-32 x 27/64"
370E	34589	Decal, Choke
	34346	Decal, Instruction
	550223	Decal, Name
	34144	Decal, Primer
	34414	Decal, Warning
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
		· · · · · · · · · · · · · · · · · · ·
	631021	Inlet Needle, Seat & Clip Assy.
380	632111	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
		170 for breakdown or Fiche18A-1, Grid F-1)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
000	333 113	breakdown or Fiche 18A-1, Grid G-5)
		breakdown of Floric Tork 1, Olid O 0)
400	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
		,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
440	720572	Debrio Corean Kit (Incl. 200, 270D, 207, 444, 9,442) (Con. bo
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
<b>∆</b> 11	35568	Debris Screen (Can be used on HM80 with stamped steel
-т і і		recoil starter)
		,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
		•

Ref #	Part Number	Qty	Description
421	730225 730226 730572		SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

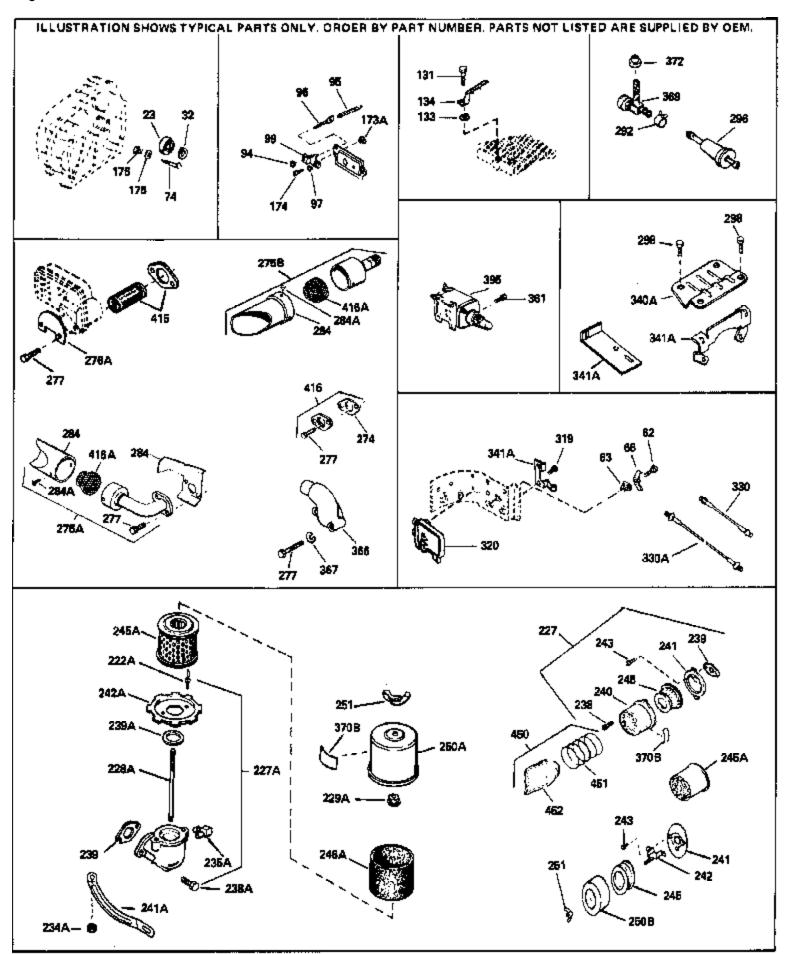

Rof #	Part Number Qty	Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
131	650738	Screw, 1/4-20 x 5/8" (Use as required )
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
	=00.404	, ,
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
2284	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	
220A	030031	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
245A	34700	Element, Air cleaner
	35865	Gasket, Exhaust (Use as required)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2.05	001020	can be used on any model.)
		• ,
	35824	Muffler (Optional quiet muffler)
277	650729	Screw, 5/16-18 x 3-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	34387	Decal, Instruction Can be used on HM80 with stamped steel
5.5-		recoil starter.
	34870_	Decal, Instruction Can be used on HM80 with diecast starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
400	05570	O O (O k LIMOO - 'Vkt k
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100	00000	starter)
		,
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
111	35568	Dobric Scroon (Can be used on HM90 with stamped steel
411	33300	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
=	700400	,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
AOO	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
429		
		Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
		Handbook for installation instructions).
		,

Ref #	Part Number	Qty	Description
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

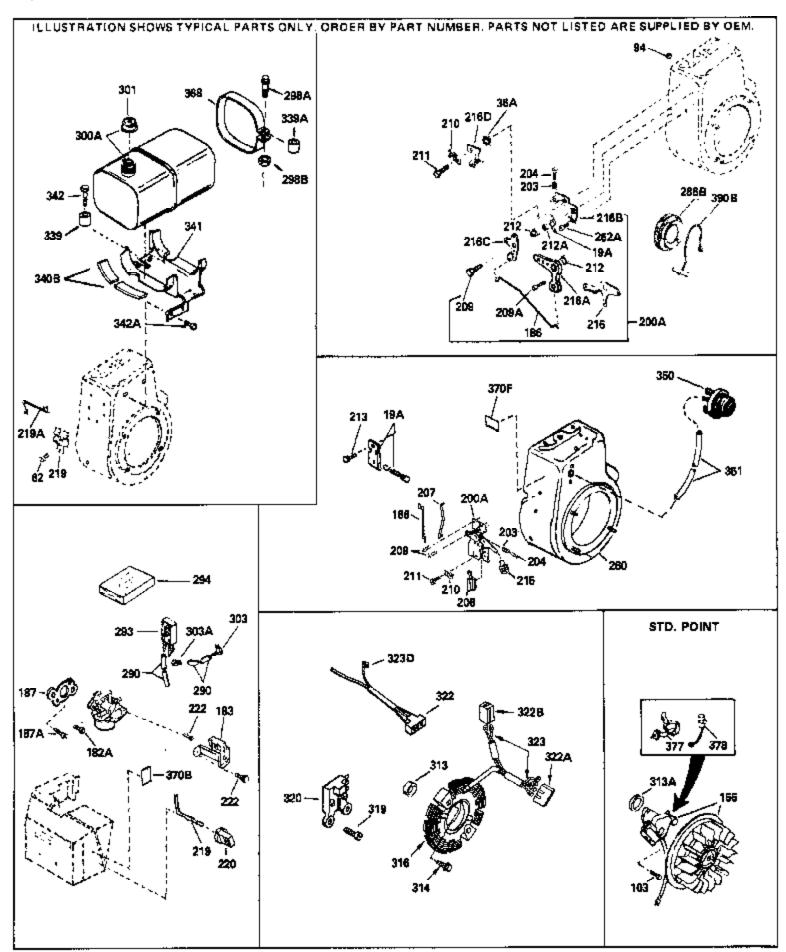

Rof #	Part Number C	ty Description
	650760	Screw, 8-32 x 3/8"
	650489	Screw, 1/4-20 x 5/8"
	610842	Magneto (Incl. 377 & 378) NOTE: The complete magneto is
		not available as an assembly. The magneto number is shown
		for reference purposes only. Order component parts
		individually, as shown in parts list. (Refer to Division 5,
		Section B, page 28 for breakdown or Fiche 18A-1, Grid G-1)
400	0.4505	
	34587	Bracket, Choke
	34667	Link, Governor
	34664	Control Bracket (Incl.19,203,204,206, 209)
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	33878	Link, Governor-to-throttle
	650821	Screw, 10-32 x 1/2"
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820 34145	Screw, 10-32 x 1/2"
	35824	Blower Housing (For electric starter)  Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
301	00002	I.D.)
204	0.404.0	
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
313A	33876	Gasket, Stator
339	35038	Spacer, Tank
341	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570629A	Primer Assy.
	32180C	Primer Line
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
370.1	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	30547A	Contact Assy., Breaker
_	30548B	Condenser
	35570	Screen Seal (Can be used on HM80 with stamped steel
.00		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
	650907	<b>y</b>	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).