


Ref #	Part Number Qt	
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33365B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
42	34332	Ring Set (Std.) (3-1/8" Bore)
42	34333	Ring Set (.010" OS)
42	34334	Ring Set (.020" OS)
43	27888	Ring, Piston pin retaining
45	32591C	Rod Assy., Connecting (Incl. 49)
47	650662C	Bolt, Connecting rod (2 pieces)
48	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
		<u> </u>
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650489	Screw, 1/4-20 x 5/8"
108	29783	Pin, Crankshaft gear
109	33245	Gear, Crankshaft

Ref #	Part Number G	ty Description
-	34240	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
130/4	0021A	650691 washer)
4044	0.000.0	,
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, 1/4-20 x 5/8" (Use as required )
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	35056	Muffler
276	31588	Plate, Muffler locking
277	651002	Screw, 5/16-18 x 4-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
281	33013	Cover, Starter bubble
282	650760	Screw, 8-32 x 3/8"


		y Description
	33662	Hub & Screen Assy., Starter
287	29752	Nut & Lockwasher, 1/4-28
290	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	
		Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
201	4404.44D	Fuel Cap (Mista Plantia)(Ctd)(1.1/0" LD.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
301	0 <del>1</del> 210	(1-3/16" I.D)
		(1-3/16 1.0)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A	Tube, Oil fill
	33590	"O" Ring
	34011A	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	650765	Screw, 10-32 x 1/2"
	35057A	Cover, Carburetor
338	28942	Screw, 10-32 x 3/8"
340	34154	Plate, Fuel tank mounting
341	34155	Bracket, Fuel tank mounting
342	650561	Screw, 1/4-20 x 5/8"
	34141	Guard, Starter
	32576	Seal, Snow guard
	33377	Bracket, Carburetor cover mounting
		•
	650767	Screw, 8-32 x 27/64"
	34589	Decal, Choke
	34346	Decal, Instruction
	34686	Decal, Name
370C	34144	Decal, Primer
370D	34414	Decal, Warning
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
379	631021	Inlet Needle, Seat & Clip Assy.
	632334A	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
000	00200 11 (	188 for breakdown or Fiche18A-1, Grid F-5)
		100 for breakdown of Florie To/C 1, Gha i 3)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
		breakdown or Fiche 18A-1, Grid G-5)
100	000700	O and at O at (least 11 and a set)
	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	25560	Spacer (Can be used an HMO) with stamped steel resail
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
710	. 555. 5	used on HM80 with stamped steel recoil starter)
		asea on i liviou with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
		·

Ref #	Part Number Qty	Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

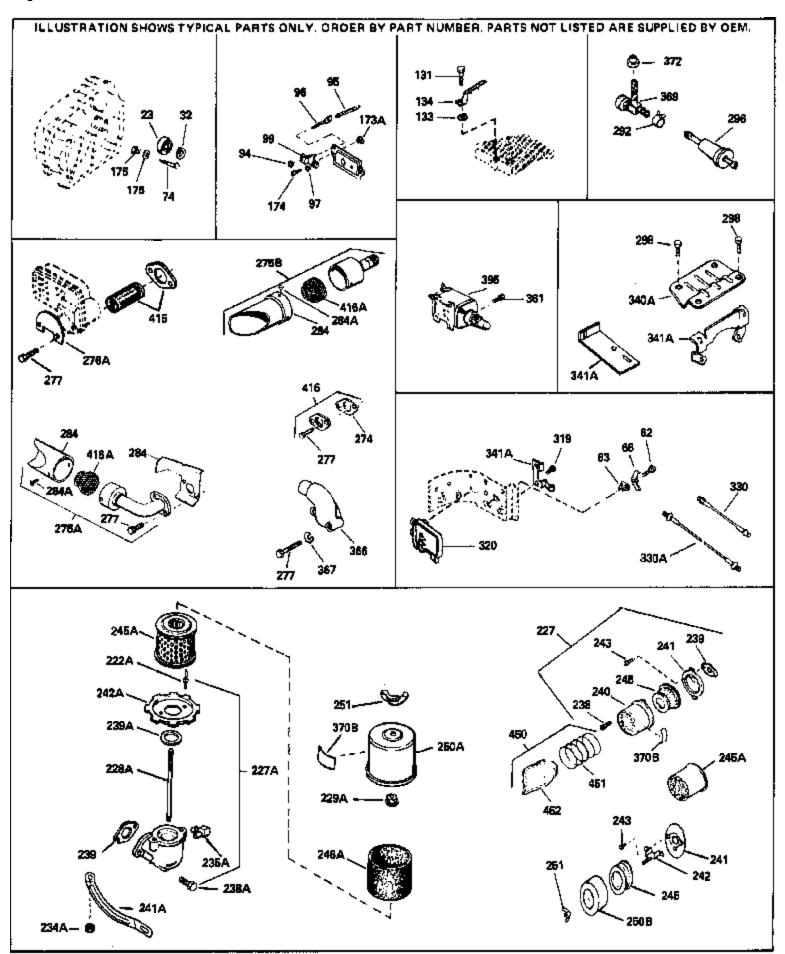

Def #	Dout Novelon Of a	Description
		Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
74	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
207	7004.04	Air Classer Apply (Incl. 220, 220, 240, 241, 242, 8, 245) (Lies
221	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
2201	650824	Stud 1/4 20 x 7 22 (Use as required)
		Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
2450	34700	Element, Air cleaner
		·
	35865	Gasket, Exhaust (Use as required)
2/5B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
275C	35824	Muffler (Optional quiet muffler)
	651002	Screw, 5/16-18 x 4-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
369	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel
3705	3-100 <i>i</i>	recoil starter.
		1600ii Statter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
400	33370	
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
		olarior)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
		•
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	050007	Carrery 5/40/40 at 4 5/01/ (Carr ha cread as 1 1/400 critic
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
<i>1</i> 15	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
ለኃር	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
723		
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

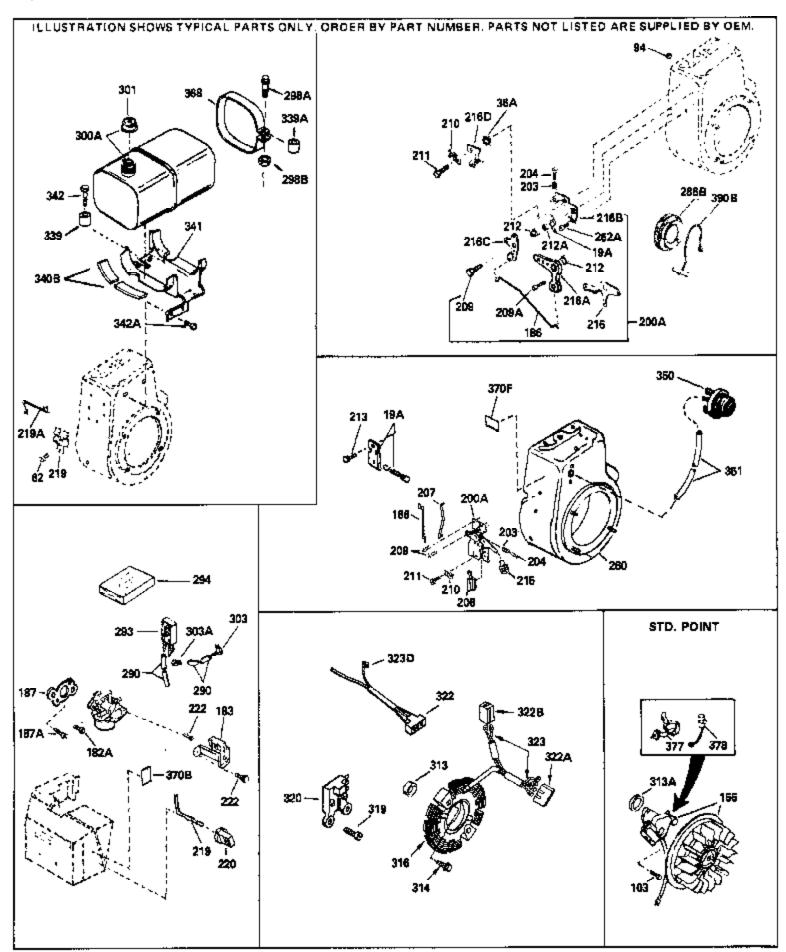

62 103	Part Number 650760 650489 610848	Qty	Description  Screw, 8-32 x 3/8"  Screw, 1/4-20 x 5/8"  Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Page 10 of 11

Rof #	Part Number 0	Qty Description
	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).