


| Ref # | Part Number | Qtv | Description |
|-------|-------------|-----|--|
| | 34348B | Qty | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| | 27652 | | Pin, Dowel |
| | 650820 | | Screw, 1/4-20 x 1/2" |
| | 30968 | | Nipple, Pipe |
| | 30969 | | Cap, Oil drain |
| 15A | 30700 | | Yoke, Governor |
| 15B | 650494 | | Screw, 6-40 x 5/16" |
| 15 | 30699C | | Rod Assy., Governor (Incl. 15A & 15B) |
| 16 | 33454 | | Governor Lever Assy. |
| 17 | 29916 | | Clamp, Governor lever |
| 18 | 650548 | | Screw, 8-32 x 5/16" |
| 19 | 34663 | | Spring, Speed control |
| 20 | 32630 | | Seal, Oil |
| 25 | 35256A | | Baffle, Blower housing |
| 26 | 650561 | | Screw, 1/4-20 x 5/8" |
| 30 | 33459A | | Crankshaft (Incl. 108 & 109) |
| 35 | 29826 | | Screw, 10-32 x 3/4" |
| | 29918 | | Lockwasher, # 8 E.T. |
| 37 | 29216 | | Nut & Lockwasher, 10-32 "Keps" |
| 37A | 30322 | | Locknut, Hex "Keps", 8-32 |
| 38 | 29642 | | Ring, Retaining |
| 40 | 34552 | | Piston, Pin & Ring Set (Std.) (3-1/8") |
| 40 | 34553 | | Piston, Pin & Ring Set (.010" OS) |
| 40 | 34554 | | Piston, Pin & Ring Set (.020" OS) |
| 41 | 34329A | | Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
| 41 | 34330A | | Piston & Pin Ass'y. (.010" OS)(Incl. 43) |
| 41 | 34331A | | Piston & Pin Ass'y. (.020" OS)(Incl. 43) |
| 42 | 34332 | | Ring Set (Std.) (3-1/8" Bore) |
| 42 | 34333 | | Ring Set (.010" OS) |
| 42 | 34334 | | Ring Set (.020" OS) |
| 43 | 27888 | | Ring, Piston pin retaining |
| | 32591C | | Rod Assy., Connecting (Incl. 49) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| | 34034 | | Lifter, Valve |
| | 34242 | | Dipper, Oil |
| 50 | 34143 | | Camshaft (MCR) |
| | 33273A | | Extension, Blower housing |
| | 34126 | | Bracket, Grommet mounting |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet, Plastic |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 35262 | | * Gasket, Cylinder cover |
| | 33367B | | Cylinder Cover (Incl. 71, 75, 80, 311 & 312) |
| | 33368 | | Bushing, Crankshaft |
| | 27642 | | Plug, Oil drain |
| | 31950 | | Seal, Oil |
| | 31845 | | Shaft, Mechanical governor |
| | 30590A | | Washer, Flat |
| | 30591 | | Gear Assy., Governor (Incl. 81) |
| | 30588A | | Spool, Governor |
| | 29193 | | Ring, Retaining |
| | 650833 | | Screw, 1/4-20 x 1-3/16" |
| | 650832 | | Screw, 1/4-20 x 1-11/16" |
| | 32589 | | Key, Flywheel |
| | 650815 | | Washer, Belleville |
| | 8116 | | Nut, Hex (1/2-20) |
| | 610118 | | Cover, Spark plug (Use as required) |
| 103 | 650489 | | Screw, 1/4-20 x 5/8" |
| | | | |

| | Part Number Qt | |
|------|----------------|---|
| | 29783 | Pin, Crankshaft gear |
| 109 | 33245 | Gear, Crankshaft |
| 110 | 34240 | Ground Wire |
| 119 | 34041A | * Gasket, Head |
| | 34030A | Head, Cylinder |
| | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | Intake Valve (Std.) (Incl. 151) |
| | | |
| | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| | 26073 | Washer, Flat (Use as required) |
| | 650570 | Washer, Flat (Use as required) |
| | 650691 | Washer (Use as req., but not w/6021A screw) |
| 128 | 650690 | Washer, Belleville |
| 129 | 650727 | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse wit |
| | | 650691 washer) |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| 131 | 650802 | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 33636 | Resistor Spark Plug (RJ17LM) |
| | | |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 27882 | Cap, Upper valve spring |
| | 35862 | Seal Assy., Intake valve |
| 150 | 27881 | Spring, Valve |
| 151 | 32581 | Cap, Lower valve spring |
| 169 | 27896A | * Gasket, Breather cover |
| | 28423 | Body, Breather |
| | 28424 | Element, Breather |
| | 28425 | Cover, Valve spring |
| | | |
| | 35350 | Tube, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 650597 | Screw, 10-24 x 5/8" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| 179B | 30593 | Clip, Primer line (Use as required) |
| 182 | 30088A | Screw, 1/4-28 x 1" |
| 184 | 33263 | * Gasket, Carburetor |
| | 33877 | Pipe, Intake |
| | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| | | |
| | 610973 | Terminal Assy. (Use as required) |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| | 650378 | Screw, Torx T-30, 5/16-18 x 1-1/8 " |
| 224 | 27915A | * Gasket, Intake pipe |
| 260 | 35447A | Blower Housing (For electric starter) |
| | 650788 | Screw, 5/16-18 x 3/4" (Use as require d) |
| | 29747B | Screw, 5/16-24 x 21/32" |
| | 33272B | |
| | | Cover, Cylinder head |
| | 33280A | Muffler |
| | 35824 | Muffler (Optional quiet muffler) |
| | 31588 | Plate, Muffler locking |
| 277A | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 650729 | Screw, 5/16-18 x 3-3/16" |


| | | / Description |
|------|---------|--|
| 281 | 33013 | Cover, Starter bubble |
| 282 | 650760 | Screw, 8-32 x 3/8" |
| | 33662 | Hub & Screen Assy., Starter |
| | 29752 | Nut & Lockwasher, 1/4-28 |
| | 29774 | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | | |
| | 30705 | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| | 30962 | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| 292 | 26460 | Clamp, Fuel line (Use as required) |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| 300 | 34160A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | builtwith different size fuel inlet openings. Tanks with the |
| | | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1/2" I.D. opening use fuel cap 35355. |
| | | |
| 301 | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| | | I.D.) |
| | | |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/16" I.D) |
| 201 | 25255 | Fuel Cap (Red placetic) (1.1/2" LD) |
| | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| | 33893A | Tube, Oil fill |
| | 33590 | "O" Ring |
| 310 | 34011A | Dipstick (Incl. 306) |
| 325 | 29443 | Clip, Fuel line (Use as required) |
| 325 | 34246 | Clip, Ground wire (Use as required) |
| 336 | 650765 | Screw, 10-32 x 1/2" |
| | 34666 | Cover, Carburetor |
| | 28942 | Screw, 10-32 x 3/8" |
| | 34154 | Plate, Fuel tank mounting |
| | | • |
| | 34155 | Bracket, Fuel tank mounting |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 34141 | Guard, Starter |
| | 32576 | Seal, Snow guard |
| 364 | 33377 | Bracket, Carburetor cover mounting |
| 365 | 650767 | Screw, 8-32 x 27/64" |
| 370J | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| 379 | 631021 | Inlet Needle, Seat & Clip Assy. |
| | 632111 | Carburetor (Incl. 184) (Refer to Division 5, Section A, page |
| | | 170 for breakdown or Fiche18A-1, Grid F-1) |
| | | |
| 390 | 590479 | Rewind Starter (Refer to Division 5, Section C, page 30 for |
| | | breakdown or Fiche 18A-1, Grid G-5) |
| 400 | 222700 | |
| | 33279G | Gasket Set (Incl. items marked*) |
| 408 | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| 400 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil |
| 409 | 30009 | • . • • |
| | | starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| | | used on HM80 with stamped steel recoil starter) |
| | | |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| | | , |
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with |
| | | stamped steel recoil starter) |
| 400 | 720225 | SAE 20, 4 Cuelo Engine Oil (Ouert) |
| | 730225 | SAE 30, 4-Cycle Engine Oil (Quart) |
| 421 | 730226 | SAE 5W30, 4-Cycle Engine Oil (Quart) |
| | | |

| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| 425 | 730572 | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

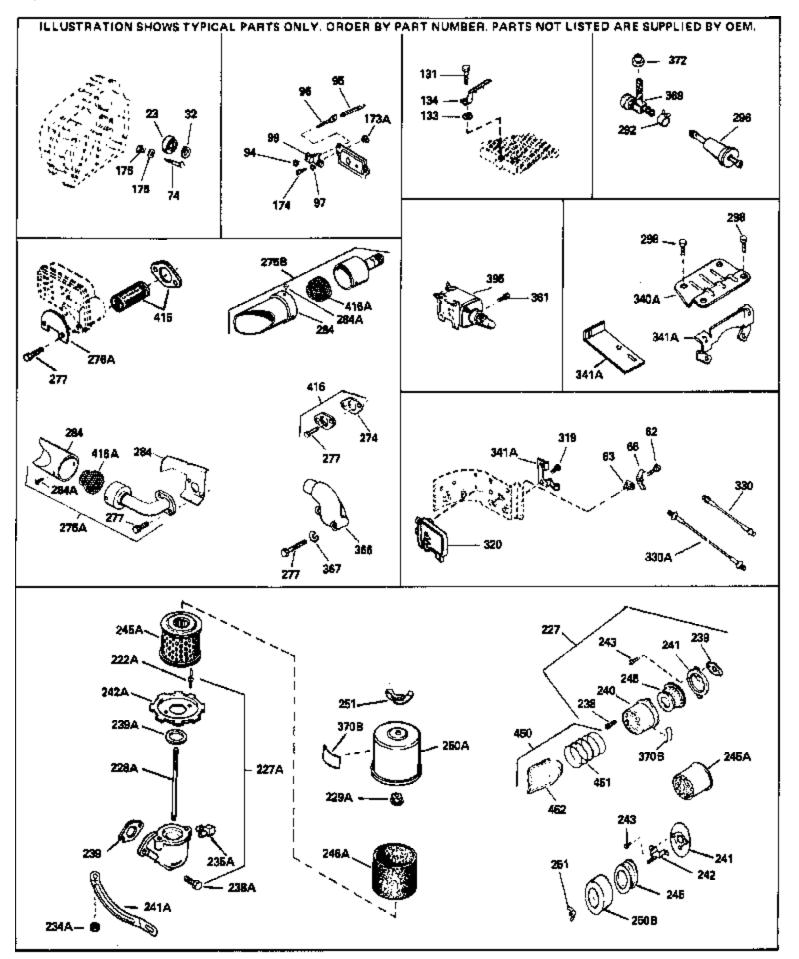

| split, #10 (Buy loc ally) ' (Use as required) ' (Use as required) ' (Use as required) hcl.238,239,240,241,243,245 & 370) hcl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" '4" (Used with 276A) |
|--|
| ¹ (Use as required) ¹ (Use as required) ¹ (Use as requi |
| ¹ (Use as required) ¹ (Use as required) ¹ (Use as requi |
| ¹ (Use as required) ¹ (Use as required) ¹ (Use as requ |
| ¹ (Use as required) ¹ (Use as 239,240,241,243,245 & 370) ¹ (Use as 239,240,241,243 & 245) (Use (Use as required)) ¹ (Use as required) ¹ (Use as required) |
| ' (Use as required) ' (Use as required) ' (Use as required) ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Use as required) Use as required) (Use as required)<!--</td--> |
| " (Use as required) ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A) |
| ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A) |
| ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A) |
| (Use as required) Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| (Use as required) Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A) |
| model.) et muffler) 3/16" (4" (Used with 276A) |
| et muffler) 3/16" '4" (Used with 276A) |
| 8/16" (Used with 276A) |
| '4" (Used with 276A) |
| |
| |
| se as required) |
| |
| |
| |
| an be used on HM80 with diecast starter. |
| an be used on HM80 with stamped steel |
| |
| 0-120 Volt) This 110-120 volt starter |
| been added to this engine. It can be |
| er hasdrilled and tapped starter mounting |
| ear flywheel. Refer to service number |
| |
| o of motor, or on decal for identification. |
| |
| e used on HM80 with stamped steel |
| |
| |
| |
| d on HM80 with stamped steel recoil |
| d on HM80 with stamped steel recoil |
| |
| ncl. 360, 370B, 387, 411 &413) (Can be |
| |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) |
| ncl. 360, 370B, 387, 411 &413) (Can be |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) |
| hcl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) d.274,277)(Use as req.) |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) 4.274,277)(Use as req.) 370J, 426 & 4 27) (Can be used on |
| hcl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) d.274,277)(Use as req.) |
| ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) 4.274,277)(Use as req.) 370J, 426 & 4 27) (Can be used on |
| |

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

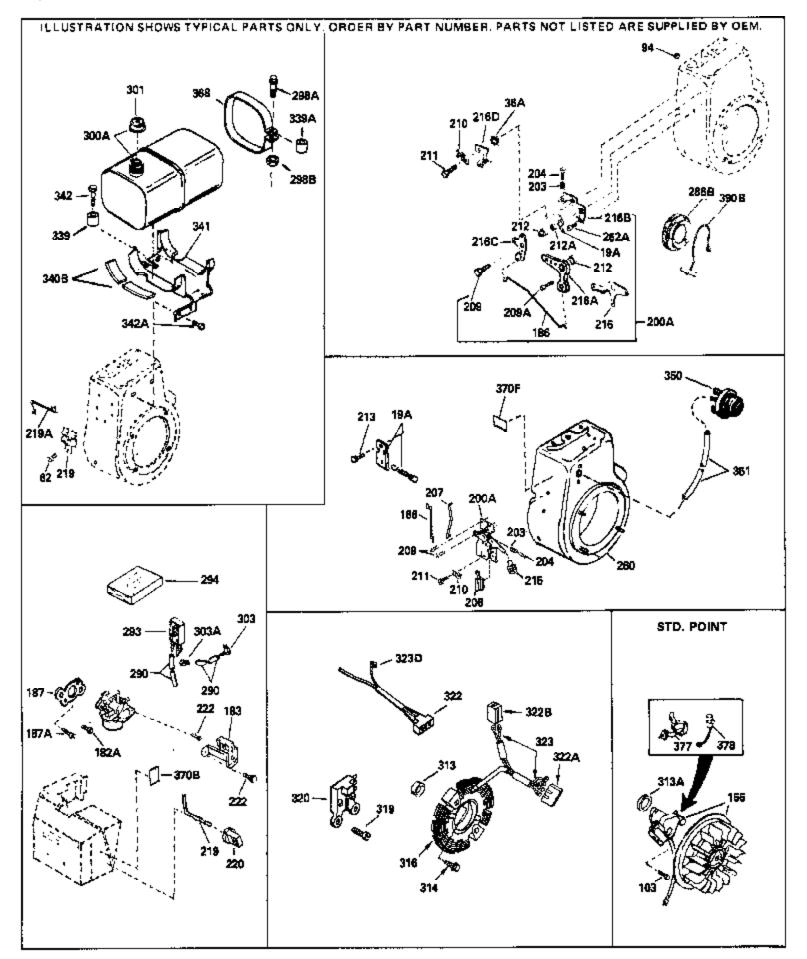

| Ref # | Part Number | Qty Description |
|-------|-------------|--|
| | 650760 | Screw, 8-32 x 3/8" |
| | 650489 | Screw, 1/4-20 x 5/8" |
| 156 | 610848 | Magneto (w/ring gear for 110 volt sta rter) NOTE: The |
| | | complete magneto is not available as an assembly. The |
| | | magneto number is shown for reference purposes only. Order |
| | | component parts individually, as shown in parts list. (Refer to |
| | | Division 5, Section B, page 28 for breakdown or Fiche 18A-1, |
| | | Grid G |
| 183 | 34587 | Bracket, Choke |
| | 34667 | Link, Governor |
| | 34664 | Control Bracket (Incl.19,203,204,206, 209) |
| | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| | 610973 | Terminal Assy. (Use as required) |
| | 33878 | Link, Governor-to-throttle |
| | 650821 | Screw, 10-32 x 1/2" |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| 219 | 34586 | Rod, Choke |
| 220 | 35438 | Knob, Control |
| 222 | 28820 | Screw, 10-32 x 1/2" |
| 260 | 35447A | Blower Housing (For electric starter) |
| 275C | 35824 | Muffler (Optional quiet muffler) |
| 277A | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| 286B | 33662 | Hub & Screen Assy., Starter |
| | 29774 | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | 30705 | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| | 30962 | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| | | I.D.) |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/16" I.D) |
| 301 | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| | 33876 | Gasket, Stator |
| | 35038 | Spacer, Tank |
| | 34155 | Bracket, Fuel tank mounting |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 570682 | Primer Assy. |
| | 32180C | Primer Line |
| | 34387 | Decal, Instruction Can be used on HM80 with stamped steel |
| | | recoil starter. |
| 370 I | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 30547A | Contact Assy., Breaker |
| | 30548B | Condenser |
| | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 413 | 650907 | | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| 425 | 730572 | | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |