


Ref #	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
15B	650494	Screw, 6-40 x 5/16"
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	30700	Yoke, Governor
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	33578	Spring, Governor
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33365B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	30322	
		Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
49	34242	Dipper, Oil
50	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650516	Screw, 1/4-20 x 1-1/8
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
	33245 34041A	* Gasket, Head
		•
	34030A	Head, Cylinder  Exhaust Valva (Std.) (Incl. 151)
	27878A 27880A	Exhaust Valve (Std.) (Incl. 151)  Exhaust Valve (1/32" OS) (Incl. 151)
123	21 UUU/\	Exhaust Valve (1/32" OS) (Incl. 151)


Ref #	Part Number	Qtv	Description
	34035	<i>∽</i> .,	Intake Valve (Std.) (Incl. 151)
	34036		Intake Valve (1/32" OS) (Incl. 151)
	650691		Washer (Use as req., but not w/6021A screw)
	26073		Washer, Flat (Use as required)
			·
	650570		Washer, Flat (Use as required)
	650690		Washer, Belleville
	650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A		Screw, 5/16-18 x 2" (Use as required)
130A	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
			650691 washer)
131A	650713		Screw, 5/16-18 x 5/8" (Use as require d)
	792028		Screw, 5/16-18 x 7/8" (Use as require d)
	650802		Screw, 1/4-20 x 5/8" (Use as required )
	650737		Screw, 1/4-20 x 1/2" (Use as required )
	650738		Screw, 1/4-20 x 5/8" (Use as required )
	33636		Resistor Spark Plug (RJ17LM)
	33369		Bracket, Governor gear
			Screw, 10-24 x 1/2"
	650836		·
	27882		Cap, Upper valve spring
	27882		Cap, Upper valve spring
	27881		Spring, Valve
	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	29752		Nut & Lockwasher, 1/4-28
	30593		Clip, Primer line (Use as required)
	30088A		Screw, 1/4-28 x 1"
	33263		* Gasket, Carburetor
	33877		Pipe, Intake
	32924		Spring, Compression
	650688		Screw, 10-32 x 1"
	610973		Terminal Assy. (Use as required)
	27793		Clip, Conduit
	28942		Screw, 10-32 x 3/8"
	650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A		* Gasket, Intake pipe
	33375D		Blower Housing (For electric starter)
	650788		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
	35824		Muffler (Optional quiet muffler)
	650628A		Screw, 5/16-18 x 2-3/8"
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
	33662		Hub & Screen Assy., Starter
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)

Ref #	Part Number	Qty Description
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 310 320A 325 325 370J 370A 370 379	35355 34199 30924A 32765 29443 34246 34870 550223 34346 631021 631979	Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil filler Dipstick (Incl. 306) Clamp, Blower housing extension Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Decal, Instruction Can be used on HM80 with diecast starter. Decal, Name Decal, Instruction Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 150 for breakdown or Fiche18A-1, Grid E-7)
	33279G 35570	Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

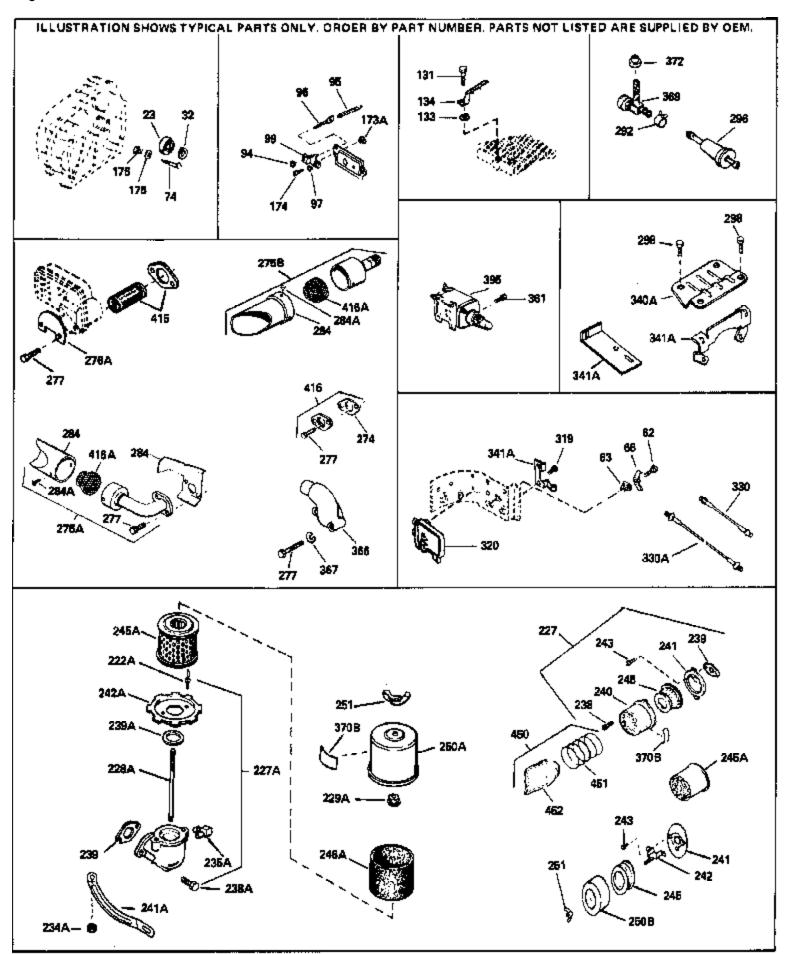

74 97 131 131 131 174 174 227	Part Number 31855 650802 650737 650738 650128 650597 730127	Qty	Description  Retainer, Bearing  Lockwasher, Heavy split, #10 (Buy loc ally)  Screw, 1/4-20 x 5/8" (Use as required)  Screw, 1/4-20 x 1/2" (Use as required)  Screw, 1/4-20 x 5/8" (Use as required)  Screw, 10-24 x 1/2"  Screw, 10-24 x 5/8"  Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)  (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
	650824 650851		Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
239 239 240 241 243 245A 245 274 275C	650152 27272A 27272A 31715 31691 28820 34700 30727 35865 35824 391026		Screw, 8-32 x 3/8"  * Gasket, Air cleaner  * Gasket, Air cleaner  Body, Air cleaner  Bracket, Air cleaner  Screw, 10-32 x 1/2"  Element, Air cleaner  Element, Air cleaner  Gasket, Exhaust (Use as required)  Muffler (Optional quiet muffler)  Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277A 292 319 320A 320 361 366 367	650628A 650696 26460 28820 32765 610938 30063 33621 8274		Screw, 5/16-18 x 2-3/8" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 10-32 x 1/2" Clamp, Blower housing extension Regulator, Rectifier (7 Amp) Screw, Torx T-30, 1/4-20 x 1/2" Elbow, Exhaust Washer, Lock Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	34870 35763A		Decal, Instruction Can be used on HM80 with diecast starter. Electric Starter Motor (12 Volt) (Refer to service number stamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D, Page 20 for breakdown or Fiche 18A-1, Grids G-9, G-10 or G-11)
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
451	730512 31667 31668		Pre-Cleaner Kit (Incl. 451 & 452) Spring Pre-cleaner bag Bag, Pre-cleaner

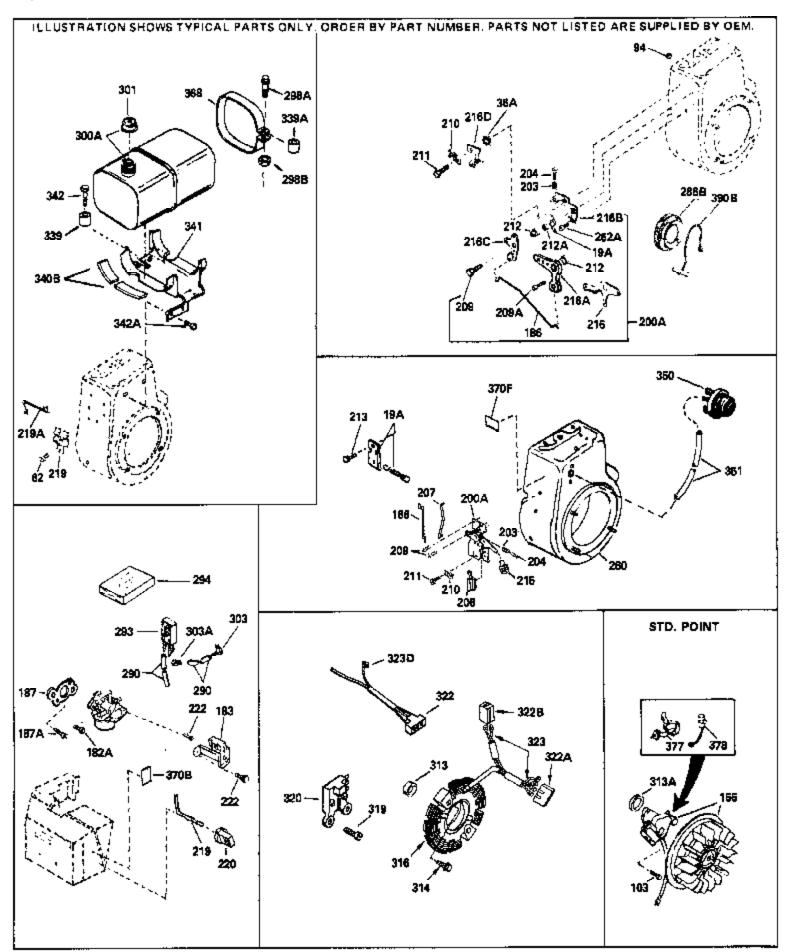

Pof #	Part Number	Oty Description
	650516	Qty Description Screw, 1/4-20 x 1-1/8
	610979	Magneto (w/ring gear) (12 Volt, 7 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
	33372 730152	Link, Governor lever-to-bellcrank Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A)
204 206 207 209A 210 211 212A 212 216A 216C 216B 260 262A 275C 277A 286B 290 290 290	32924 650688 610973 33878 30312 27793 28942 28562 29530 30712 30201A 30199A 33375D 650399 35824 650696 33662 29774 30705 30962 410144B 33032	Spring, Compression Screw, 10-32 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Bushing, RM. adjusting lever Bushing, Bellcrank lever Lever, Bellcrank Lever, Speed control Bracket, Speed adjusting (Incl.100 & 324) Blower Housing (For electric starter) Screw, 10-32 x 5/8" Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 319 320 320A 339 370J	35355 33876 28820 610938 32765 35038 34870 34387	Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Screw, 10-32 x 1/2" Regulator, Rectifier (7 Amp) Clamp, Blower housing extension Spacer, Tank Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
378	30547A 610767A 35570	Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).