

Ref #	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
15B	650494	Screw, 6-40 x 5/16"
15A	30700	Yoke, Governor
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
19	33578	Spring, Governor
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33720B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (0.10" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
	27642	Plug, Oil drain
	33625	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-3/10"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650516	Screw, 1/4-20 x 1-1/8
	29783	Pin, Crankshaft gear
	33245	<u> </u>
	33245 34041A	Gear, Crankshaft * Gasket, Head
	34030A	·
		Head, Cylinder Exhaust Valvo (Std.) (Incl. 151)
	27878A 27880A	Exhaust Valve (Std.) (Incl. 151) Exhaust Valve (1/32" OS) (Incl. 151)
	34035	, , , ,
120	U-1000	Intake Valve (Std.) (Incl. 151)

Ref #	Part Number Qty	Description
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
130A	002TA	650691 washer)
131 /	650713	•
	792028	Screw, 5/16-18 x 5/8" (Use as require d)
	650802	Screw, 5/16-18 x 7/8" (Use as require d)
		Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
184	33263	* Gasket, Carburetor
185	33877	Pipe, Intake
203	32924	Spring, Compression
204	650688	Screw, 10-32 x 1"
206	610973	Terminal Assy. (Use as required)
210	27793	Clip, Conduit
211	28942	Screw, 10-32 x 3/8"
223	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
224	27915A	* Gasket, Intake pipe
260	33375D	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
262	29747B	Screw, 5/16-24 x 21/32"
265	33272B	Cover, Cylinder head
	33280A	Muffler
	35824	Muffler (Optional quiet muffler)
	31588	Plate, Muffler locking
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 6-1/4)(21 GH)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460 650665	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"


Def #	Dout Novele on	t. Description
	Part Number Q 34156A	ty Description Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
300	34130A	builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 306 310 320A 325 325 340 341 342 370A 370J 370 379	35355 33893A 33590 34011A 32765 29443 34246 34154 34155 650561 550223 34870 34346 631021 631979	Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Clamp, Blower housing extension Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Name Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 150 for breakdown or Fiche18A-1, Grid E-7)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570	Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226 730572	SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)

Ref #	Part Number Q	ty Description
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).



Ref #	Part Number Qty	Description
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
221	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
239	27272A	* Gasket, Air cleaner
239	27272A	* Gasket, Air cleaner
241	33266	Bracket, Air cleaner
242	33267	Bracket, Air cleaner
	28820	Screw, 10-32 x 1/2"
	34700	Element, Air cleaner
	33268	Element, Air cleaner
	33269A	Cover, Air cleaner
	650513	Nut, Wing, 1/2-20
	35865	Gasket, Exhaust (Use as required)
2/5B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	28820	Screw, 10-32 x 1/2"
	32765 610938	Clamp, Blower housing extension Regulator, Rectifier (7 Amp)
	30063	Screw, Torx T-30, 1/4-20 x 1/2"
	35857	Valve, Fuel shut-off
	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
395	35763A	Electric Starter Motor (12 Volt) (Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Refer to Division 5, Section D, Page 20 for breakdown or Fiche 18A-1, Grids G-9, G-10 or G-11)
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel recoil starter)
400	2550	,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)

Ref #	Part Number	Qty [Description
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
415	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	5	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	6	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	8	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	5	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

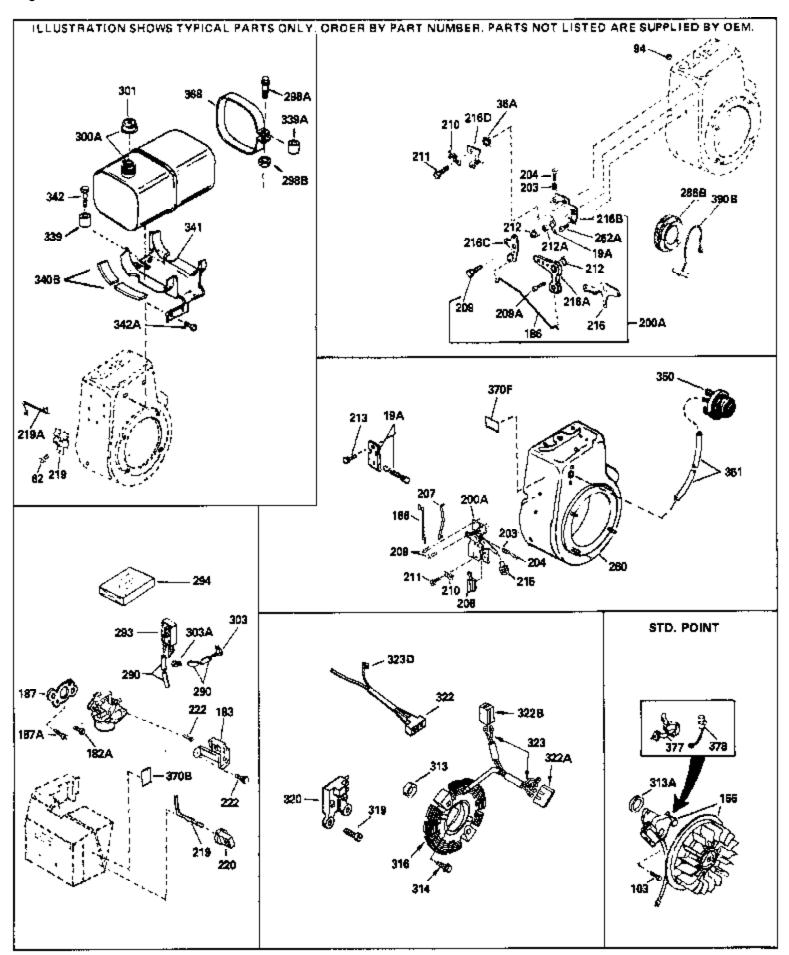

103	Part Number 650516 610979	Oty Description Screw, 1/4-20 x 1-1/8 Magneto (w/ring gear) (12 Volt, 7 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
	33372 730152	Link, Governor lever-to-bellcrank Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A)
204 206 207 209A 210 211 212 212A 216B 216A 216C 260 262A 275C 277A 286B 290 290 290	32924 650688 610973 33878 30312 27793 28942 29530 28562 30199A 30712 30201A 33375D 650399 35824 650696 33662 29774 30705 30962 410144B 33032	Spring, Compression Screw, 10-32 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Bushing, Bellcrank lever Bushing, RM. adjusting lever Bracket, Speed adjusting (Incl.100 & 324) Lever, Bellcrank Lever, Speed control Blower Housing (For electric starter) Screw, 10-32 x 5/8" Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 319 320A 320 339 341 342 370J	35355 33876 28820 32765 610938 35038 34155 650561 34870 34387	Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Screw, 10-32 x 1/2" Clamp, Blower housing extension Regulator, Rectifier (7 Amp) Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
378	30547A 610767A 35570	Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number Qty	Description
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).