


	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
	33719B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	
		Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553	Piston, Pin & Ring Set (.010" OS)
40	34554	Piston, Pin & Ring Set (.020" OS)
41	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	
		Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
47	650662C	Bolt, Connecting rod (2 pieces)
48	34034	Lifter, Valve
49	34242	Dipper, Oil
50	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	
		Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
89	32589	Key, Flywheel
92	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
101		
	650489	Screw 1/4-20 x 5/8"
103	650489 20783	Screw, 1/4-20 x 5/8" Pin, Crapkshaft gear
103 108	650489 29783 33245	Screw, 1/4-20 x 5/8" Pin, Crankshaft gear Gear, Crankshaft

	Part Number Qt	
	610609	Ground Wire
	34041A	* Gasket, Head
120	34030A	Head, Cylinder
125	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse wit
		650691 washer)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650713	Screw, $5/16-18 \times 5/8$ " (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	
		Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
149A	27882	Cap, Upper valve spring
150	27881	Spring, Valve
151	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	
		Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
260	34145	Blower Housing (For electric starter)
261	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
		Muffler
	33280A	
	31588	Plate, Muffler locking
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	650729	Screw, 5/16-18 x 3-3/16"
281	33013	Cover, Starter bubble
282	650760	Screw, 8-32 x 3/8"
	33662	Hub & Screen Assy., Starter
2000		

		Qty Description
290 290 292 298	29774 30705 30962 26460 650665 34156A	Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 306 310 325 325 336 337 338 340 341 342 359 360 364 365 370J 379	35355 33893A 33590 34011A 29443 34246 650765 34666 28942 34154 34155 650561 34141 32576 33377 650767 34870 631021 632111	<ul> <li>Fuel Cap (Red plastic) (1-1/2" I.D.)</li> <li>Tube, Oil fill</li> <li>"O" Ring</li> <li>Dipstick (Incl. 306)</li> <li>Clip, Fuel line (Use as required)</li> <li>Clip, Ground wire (Use as required)</li> <li>Screw, 10-32 x 1/2"</li> <li>Cover, Carburetor</li> <li>Screw, 10-32 x 3/8"</li> <li>Plate, Fuel tank mounting</li> <li>Bracket, Fuel tank mounting</li> <li>Screw, 1/4-20 x 5/8"</li> <li>Guard, Starter</li> <li>Seal, Snow guard</li> <li>Bracket, Carburetor cover mounting</li> <li>Screw, 8-32 x 27/64"</li> <li>Decal, Instruction Can be used on HM80 with diecast starter.</li> <li>Inlet Needle, Seat &amp; Clip Assy.</li> <li>Carburetor (Incl. 184) (Refer to Division 5, Section A, page 170 for breakdown or Fiche18A-1, Grid F-1)</li> </ul>
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570	Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)

Ref #	Part Number	Qty	Description
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

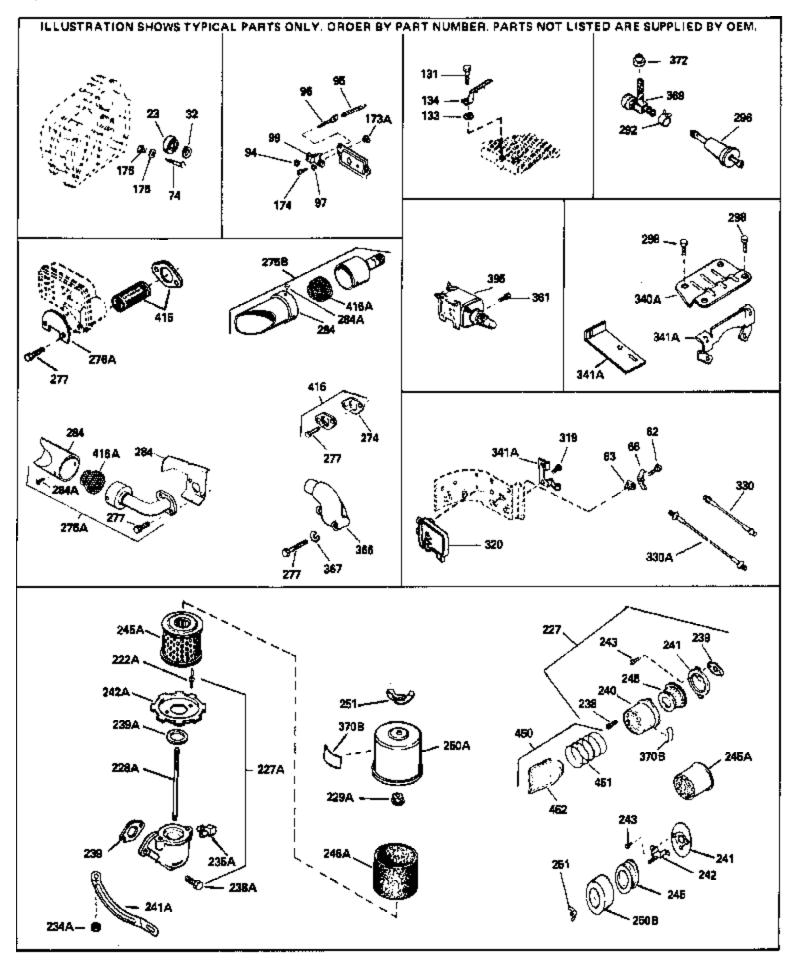

		/ Description
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	31855	Retainer, Bearing
	31000	
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
ZZðA	1 COUCO	
		elbow)
0454	24700	Floment Air closer
	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
		can be used on any model.
275C	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A )
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100		
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	130313	
		used on HM80 with stamped steel recoil starter)
111	35568	Debric Screen (Can be used on UM90 with stamped steel
411	30300	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	660007	Porous E/16 10 x 1 E/01/ (Con be used as LIN 100 with
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
- /		· ,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
0		HM80 with die cast starter)
		I INIOU WILLI UIE VASI SIALIEL
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
-120		
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).



		Description
	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
156	610848	Magneto (w/ring gear for 110 volt starter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
183	34587	Bracket, Choke
	34667	Link, Governor
	34677	Control Bracket (Incl.19,19A,203,204, 206,209)
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	33878	Link, Governor-to-throttle
	650821	Screw, 10-32 x 1/2"
	32410	Knob, Control
	34586	Rod, Choke
220	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
260	34145	Blower Housing (For electric starter)
275C	35824	Muffler (Optional quiet muffler)
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
286B	33662	Hub & Screen Assy., Starter
290	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
290	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16 I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
313A	33876	Gasket, Stator
339	35038	Spacer, Tank
341	34155	Bracket, Fuel tank mounting
342	650561	Screw, 1/4-20 x 5/8"
350	570629A	Primer Assy.
	32180C	Primer Line
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter
	30547A	Contact Assy., Breaker
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)

	Part Number	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).