


Ref #	Part Number	Qtv	Description
	34348B	aty	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652		Pin, Dowel
	650820		Screw, 1/4-20 x 1/2"
	32678		Nipple, Oil
	30969		Cap, Oil drain
15A	30700		Yoke, Governor
15B	650494		Screw, 6-40 x 5/16"
15	30699C		Rod Assy., Governor (Incl. 15A & 15B)
16	33454		Governor Lever Assy.
17	29916		Clamp, Governor lever
18	650548		Screw, 8-32 x 5/16"
19	34663		Spring, Speed control
20	32630		Seal, Oil
25	35256A		Baffle, Blower housing
26	650561		Screw, 1/4-20 x 5/8"
30	33365B		Crankshaft (Incl. 108 & 109)
35	29826		Screw, 10-32 x 3/4"
36	29918		Lockwasher, # 8 E.T.
37	29216		Nut & Lockwasher, 10-32 "Keps"
37A	30322		Locknut, Hex "Keps", 8-32
38	29642		Ring, Retaining
40	34552		Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553		Piston, Pin & Ring Set (.010" OS)
40	34554		Piston, Pin & Ring Set (.020" OS)
41	34329A		Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A		Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A		Piston & Pin Ass'y. (.020" OS)(Incl. 43)
42	34332		Ring Set (Std.) (3-1/8" Bore)
42	34333		Ring Set (.010" OS)
42	34334		Ring Set (.020" OS)
43	27888		Ring, Piston pin retaining
45	32591C		Rod Assy., Connecting (Incl. 49)
	650662C		Bolt, Connecting rod (2 pieces)
	34034		Lifter, Valve
	34242		Dipper, Oil
50	34143		Camshaft (MCR)
	33273A		Extension, Blower housing
	34126		Bracket, Grommet mounting
	650760		Screw, 8-32 x 3/8"
	28545		Grommet, Plastic
	650128		Screw, 10-24 x 1/2"
	35262		* Gasket, Cylinder cover
	33367B		Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368		Bushing, Crankshaft
	27642		Plug, Oil drain
	31950		Seal, Oil
	31845		Shaft, Mechanical governor
	30590A		Washer, Flat
	30591		Gear Assy., Governor (Incl. 81)
	30588A		Spool, Governor
	29193		Ring, Retaining
	650833		Screw, 1/4-20 x 1-3/16"
	650832		Screw, 1/4-20 x 1-11/16"
	32589		Key, Flywheel
	650815		Washer, Belleville
	8116		Nut, Hex (1/2-20)
	610118		Cover, Spark plug (Use as required)
103	650489		Screw, 1/4-20 x 5/8"

	Part Number Qt	
	29783	Pin, Crankshaft gear
109	33245	Gear, Crankshaft
110	34240	Ground Wire
119	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
128	650690	Washer, Belleville
129	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse wit
		650691 washer)
	650694A	Screw, 5/16-18 x 2" (Use as required)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	Seal Assy., Intake valve
150	27881	Spring, Valve
151	32581	Cap, Lower valve spring
169	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
184	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
224	27915A	* Gasket, Intake pipe
260	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	
		Cover, Cylinder head
	33280A	Muffler
	35824	Muffler (Optional quiet muffler)
	31588	Plate, Muffler locking
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	650729	Screw, 5/16-18 x 3-3/16"


	Part Number	Qty	Description
	33013		Cover, Starter bubble
282	650760		Screw, 8-32 x 3/8"
286B	33662		Hub & Screen Assy., Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		
			Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
			,
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
201	25255		Fuel Cap (Pad plantia) (1.1/2" LD.)
	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A		Tube, Oil fill
	33590		"O" Ring
310	34011A		Dipstick (Incl. 306)
325	29443		Clip, Fuel line (Use as required)
325	34246		Clip, Ground wire (Use as required)
	650765		Screw, 10-32 x 1/2"
	34666		Cover, Carburetor
	28942		Screw, 10-32 x 3/8"
	34154		Plate, Fuel tank mounting
	34155		Bracket, Fuel tank mounting
	650561		Screw, 1/4-20 x 5/8"
359	34141		Guard, Starter
360	32576		Seal, Snow guard
364	33377		Bracket, Carburetor cover mounting
365	650767		Screw, 8-32 x 27/64"
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	631021		Inlet Needle, Seat & Clip Assy.
	632111		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
300	032111		
			170 for breakdown or Fiche18A-1, Grid F-1)
3.90	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for
			breakdown or Fiche 18A-1, Grid G-5)
400	33279G		Gasket Set (Incl. items marked*)
408	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
			,
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
110	720573		Dahrie Scroon Kit (Incl. 260, 2700, 207, 411, 8412) (Can be
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 & 413) (Can be
			used on HM80 with stamped steel recoil starter)
/11	35568		Debris Screen (Can be used on HM80 with stamped steel
411	30000		· · ·
			recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
TIV			stamped steel recoil starter)
420	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
	-		

Ref #	Part Number	Qty Description
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

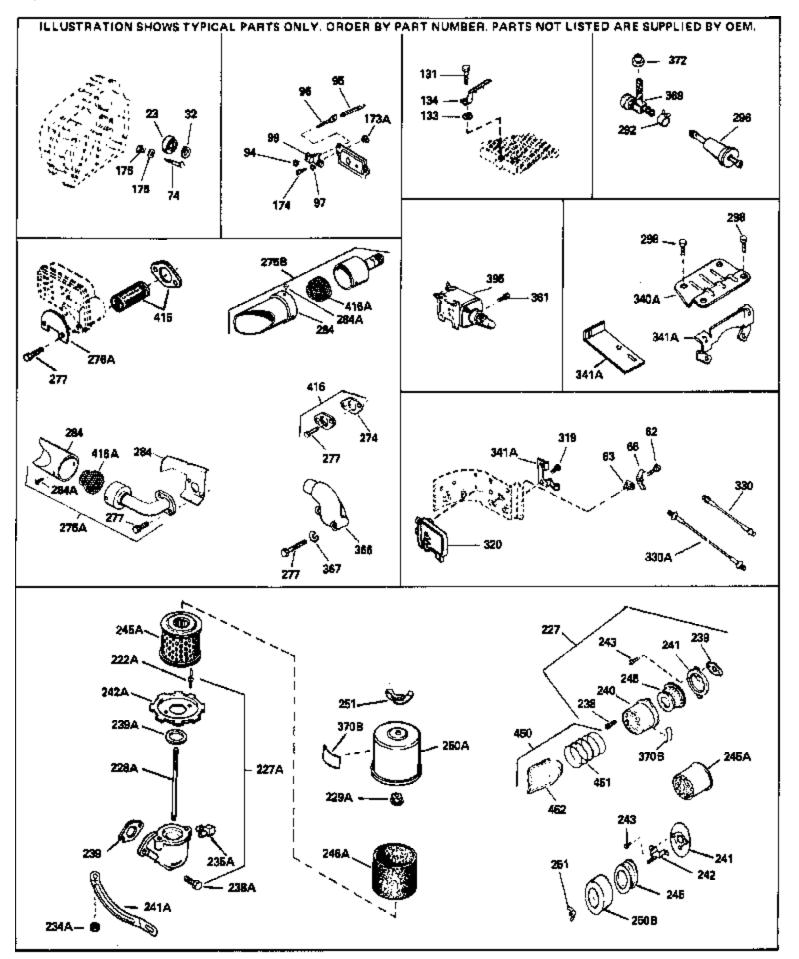

		ty Description
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	31855	Retainer, Bearing
97	01000	Lockwasher, Heavy split, #10 (Buy loc ally)
	050000	
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
	100121	(Use as required)
202	720464	
221	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
245A	34700	Element, Air cleaner
	35865	Gasket, Exhaust (Use as required)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2150	391020	can be used on any model.)
	0=00/	
	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
<u>4</u> 09	35569	Spacer (Can be used on HM80 with stamped steel recoil
-103		starter)
		Starter/
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
		· · · · · ·
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
/10	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
413	000001	
		stamped steel recoil starter)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
120		HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

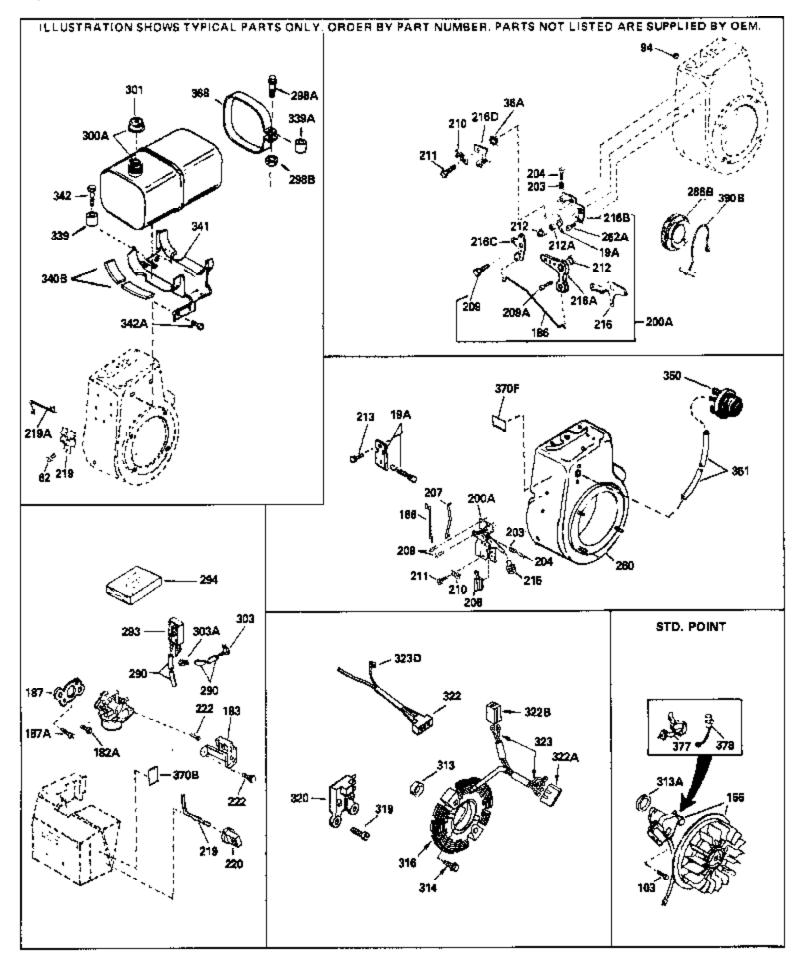

62 103	Part Number 650760 650489 610848	Qty	Description Screw, 8-32 x 3/8" Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290 301	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

		Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).