


Ref #	Part Number Qty	Description
	35385	Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
	27652	Pin, Dowel
	650494	Screw, 6-40 x 5/16"
	30699C	
		Rod Assy., Governor (Incl. 15A & 15B)
	30700	Yoke, Governor
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	35319	Seal, Oil
	35326	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	35389A	Crankshaft
32	33628	Washer, Thrust
35	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, #8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	35373A	•
		Rod Assy., Connecting (Incl. 49)
	650908	Bolt, Connecting rod
	650882	Bolt, Connecting rod
	34034	Lifter, Valve
	35374	Dipper, Oil
	35375	Camshaft (MCR)
	33273A	Extension, Blower housing
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
72	27642	Plug, Oil drain
72A	9556	Plug, Pipe
	33625	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	35378	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
		Screw, 1/4-20 x 1-3/16"
	650833	·
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611090	Flywheel
	650880	Washer, Belleville
	650881	Nut, Hex (5/8-18) (Add-on alternator)
100	35135	Lamination Assy., Solid State
101	610118	Cover, Spark plug (Use as required)
102	650872	Stud, Lamination mounting
103	650814	Screw, Torx T-15, 10-24 x 1"
119	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (3.132" OS) (Incl. 151)
	650691	Washer (Use as req., but not w/6021A screw)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650690	Washer, Belleville
129	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)

		Description
130A 6	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with 650691 washer)
130 6	650694A	Screw, 5/16-18 x 2" (Use as required)
131A 6	550713	Screw, 5/16-18 x 5/8" (Use as require d)
131A 7	792028	Screw, 5/16-18 x 7/8" (Use as require d)
131 6	550802	Screw, 1/4-20 x 5/8" (Use as required)
131 6	650737	Screw, 1/4-20 x 1/2" (Use as required)
131 6	650738	Screw, 1/4-20 x 5/8" (Use as required)
135 3	33636	Resistor Spark Plug (RJ17LM)
139 3	33369	Bracket, Governor gear
140 6	650836	Screw, 10-24 x 1/2"
149 2	27882	Cap, Upper valve spring
149A 3	35862	Seal Assy., Intake valve
150 2	27881	Spring, Valve
151 3	32581	Cap, Lower valve spring
169 2	27896A	* Gasket, Breather cover
170 2	28423	Body, Breather
171 2	28424	Element, Breather
172 2	28425	Cover, Valve spring
173 3	35350	Tube, Breather
174 6	550128	Screw, 10-24 x 1/2"
174 6	550597	Screw, 10-24 x 5/8"
178 2	29752	Nut & Lockwasher, 1/4-28
179B 3	30593	Clip, Primer line (Use as required)
182 3	30088A	Screw, 1/4-28 x 1"
184 3	33263	* Gasket, Carburetor
185 3		Pipe, Intake
	310973	Terminal Assy. (Use as required)
223 6		Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	33375D	Blower Housing (For electric starter)
	550788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
275C 3		Muffler (Optional quiet muffler)
	33280A	Muffler
276 3		Plate, Muffler locking
	550729	Screw, 5/16-18 x 3-3/16"
277A 6		Screw, 5/16-18x2-3/4" (Used with 276A)
281 3		Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
285 3		Cup, Starter
286 3		Screen, Starter (Stationary)
287 2		Nut & Lockwasher, 1/4-28
290 2		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290 3		Fuel Line (Braided 16")(41 cm)(Use as req.)
290 3		Fuel Line (Braided 32")(81 cm)(Use as req.)
292 2		Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8" Firel Tords (local 2003 & 201) NOTE: Those tords were
300 3	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
301 4	I10144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301 3	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)


		ty Description
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
306	29673	* Gasket, Oil fill
	35941	Dipstick (Incl. 306)
	31297	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	35392	Plug, Starter
	34154	Plate, Fuel tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
		·
	34346	Decal, Instruction
	34686	Decal, Name
	631021	Inlet Needle, Seat & Clip Assy.
380	632351	Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5)
390A	590633	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
	35570	Screen Seal (Can be used on HM80 with stamped steel
.00	335.0	recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref # Part Number	Qty Description
433 590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

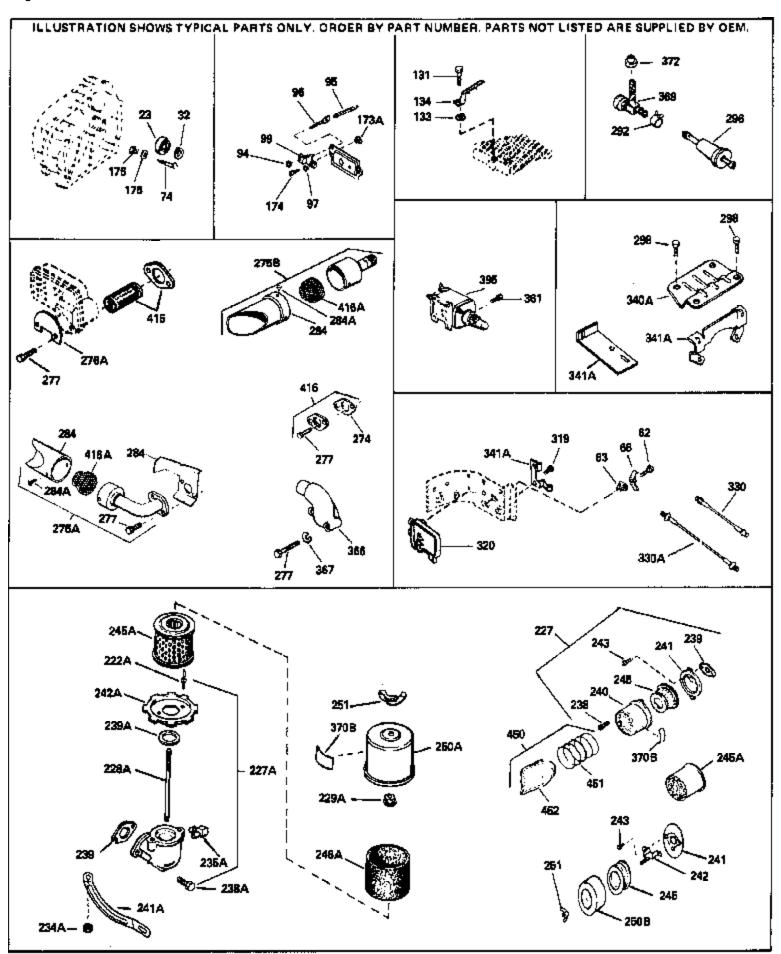

23 32 74 94 95 96 97 131 131 133 134 174 174 175	Part Number 33627 33628 31855 33450 30886A 30845A 650802 650737 650738 650890 30747 650128 650597 650778 650580 730127	Qty	Description Bearing, Ball Washer, Thrust Retainer, Bearing Nut Lock, 10-32 Spring, Extension Bolt, Governor spring adjusting Lockwasher, Heavy split, #10 (Buy loc ally) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Washer, Lock, 5/16" Clip, Spark plug shorting Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Lockwasher Nut, Lock, 10-24 Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
228A	650851		Stud, $1/4$ -20 x 8.1 (Use as required) (Used with drilled thru elbow)
239 239 241 242 243 245 245A 250B 251	650824 27272A 27272A 33266 33267 28820 33268 34700 33269A 650513 35865 391026		Stud, 1/4-20 x 7.33 (Use as required) * Gasket, Air cleaner * Gasket, Air cleaner Bracket, Air cleaner Bracket, Air cleaner Screw, 10-32 x 1/2" Element, Air cleaner Element, Air cleaner Cover, Air cleaner Nut, Wing, 1/2-20 Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 277A 292 298	35824 650729 650696 26460 650665 34387		Muffler (Optional quiet muffler) Screw, 5/16-18 x 3-3/16" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	34870 33329D		Decal, Instruction Can be used on HM80 with diecast starter. Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)

Ref#	Part Number	Qty	Description
410	730573	_	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
415	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

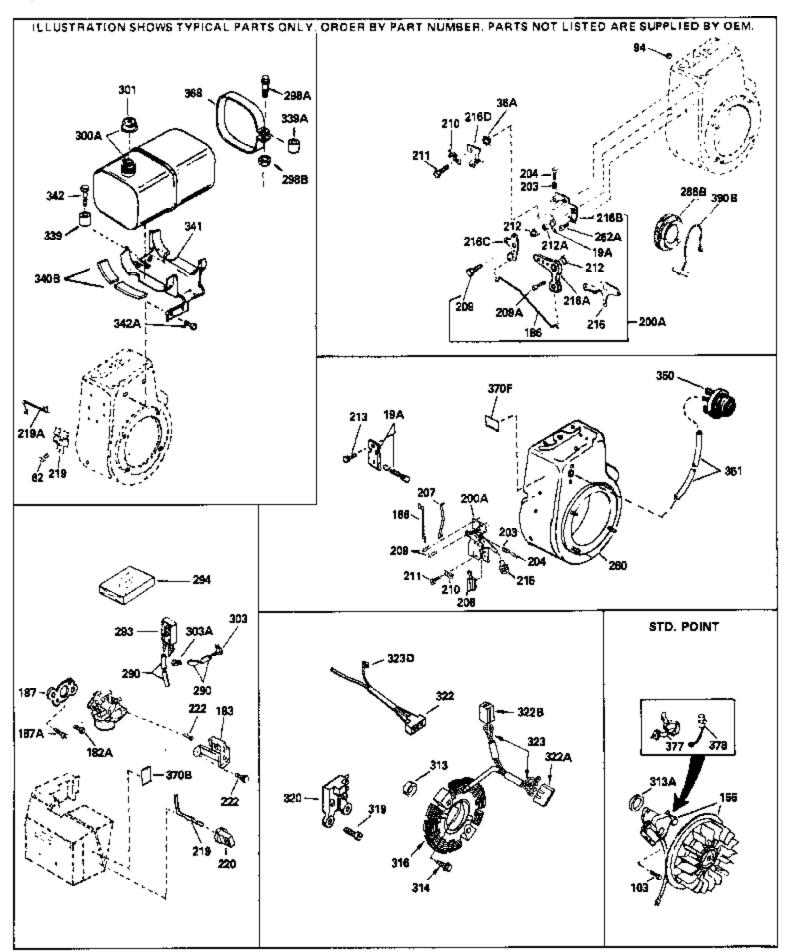

94 103 206 207 260 275C 277A 290 290 290 301	Part Number 33450 650814 610973 33878 33375D 35824 650696 29774 30705 30962 410144B 33032	Qty	Description Nut Lock, 10-32 Screw, Torx T-15, 10-24 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
339 341 342 370J	35355 35038 34155 650561 34870 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref # Part Number	Qty Description
433 590636	Alternator Shaft (Use with engines equipped with stamped
	steel starter)(Use as required) (Refer to Mechanics
	Handbook for installation instructions).