


	Part Number	Qty	Description
1	34348B		Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652		Pin, Dowel
15B	650494		Screw, 6-40 x 5/16"
	30699C		Rod Assy., Governor (Incl. 15A & 15B)
	30700		Yoke, Governor
	33454		Governor Lever Assy.
			•
	29916		Clamp, Governor lever
	650548		Screw, 8-32 x 5/16"
	33578		Spring, Governor
	32630		Seal, Oil
25	35256A		Baffle, Blower housing
26	650561		Screw, 1/4-20 x 5/8"
30	33624A		Crankshaft (Incl. 108 & 109)
32	33628		Washer, Thrust
	29826		Screw, 10-32 x 3/4"
	29918		Lockwasher, # 8 E.T.
	29216		Nut & Lockwasher, 10-32 "Keps"
	30322		Locknut, Hex "Keps", 8-32
	29642		Ring, Retaining
	34552		Piston, Pin & Ring Set (Std.) (3-1/8")
	34553		Piston, Pin & Ring Set (.010" OS)
40	34554		Piston, Pin & Ring Set (.020" OS)
41	34329A		Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A		Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A		Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332		Ring Set (Std.) (3-1/8" Bore)
	34333		Ring Set (.010" OS)
	34334		Ring Set (.020" OS)
			•
	27888		Ring, Piston pin retaining
	32591C		Rod Assy., Connecting (Incl. 49)
	650662C		Bolt, Connecting rod (2 pieces)
	34034		Lifter, Valve
	34242		Dipper, Oil
50	34143		Camshaft (MCR)
60	33273A		Extension, Blower housing
65	650128		Screw, 10-24 x 1/2"
69	35262		* Gasket, Cylinder cover
	33626B		Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
	27642		Plug, Oil drain
	33625		Seal, Oil
	31845		
			Shaft, Mechanical governor
	30590A		Washer, Flat
	30591		Gear Assy., Governor (Incl. 81)
	30588A		Spool, Governor
	29193		Ring, Retaining
86	650833		Screw, 1/4-20 x 1-3/16"
87	650832		Screw, 1/4-20 x 1-11/16"
89	32589		Key, Flywheel
	650815		Washer, Belleville
	8116		Nut, Hex (1/2-20)
	610118		Cover, Spark plug (Use as required)
	650516		Screw, 1/4-20 x 1-1/8
	29783		Pin, Crankshaft gear
	33245		Gear, Crankshaft
	34041A		* Gasket, Head
	34030A		Head, Cylinder
125	27878A		Exhaust Valve (Std.) (Incl. 151)
125	27880A		Exhaust Valve (1/32" OS) (Incl. 151)

	Part Number Q1	
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
	650691	Washer (Use as req., but not w/6021A screw)
127A		Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650690	Washer, Belleville
	650727	
		Screw, 5/16-18 x 1-3/4" (Use as required)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028	Screw, 5/16-18 x 7/8" (Use as require d)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
149A		Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
169	27896A	* Gasket, Breather cover
170	28423	Body, Breather
171	28424	Element, Breather
172	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
179B		
		Clip, Primer line (Use as required)
	33263	* Gasket, Carburetor
	32924	Spring, Compression
	650688	Screw, 10-32 x 1"
	610973	Terminal Assy. (Use as required)
211	28820	Screw
224	27915A	* Gasket, Intake pipe
260	33375D	Blower Housing (For electric starter)
261	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
286B		Hub & Screen Assy., Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
300		
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
501		


	Part Number	Qty Description
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16 I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	29673	* Gasket, Oil fill
	31297	
		Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	30063	Screw, Torx T-30, 1/4-20 x 1/2"
	34346	Decal, Instruction
370A	550223	Decal, Name
370J	34870	Decal, Instruction Can be used on HM80 with diecast starte
379	631021	Inlet Needle, Seat & Clip Assy.
380	632082	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
		168 for breakdown or Fiche18A-1, Grid E-13)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
		breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
100		,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
120	100012	HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
0		Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
		Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast
-01	000000	aluminum starter)(Use as required) (Refer to Mechanics
		Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics
		Handbook for installation instructions).
∖ \ 2)	611078	A.C. Lighting Connector (Use as required) (Refer to
	0100	Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
∖ \22	590611	Alternator Shaft (4.00") (Use with engines equipped with cas
	000011	aluminum starter)(Use as required) (Refer to Mechanics

Ref #	Part Number	Qty	Description
433	590636		Alternator Shaft (Use with engines equipped with stamped
			steel starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions).

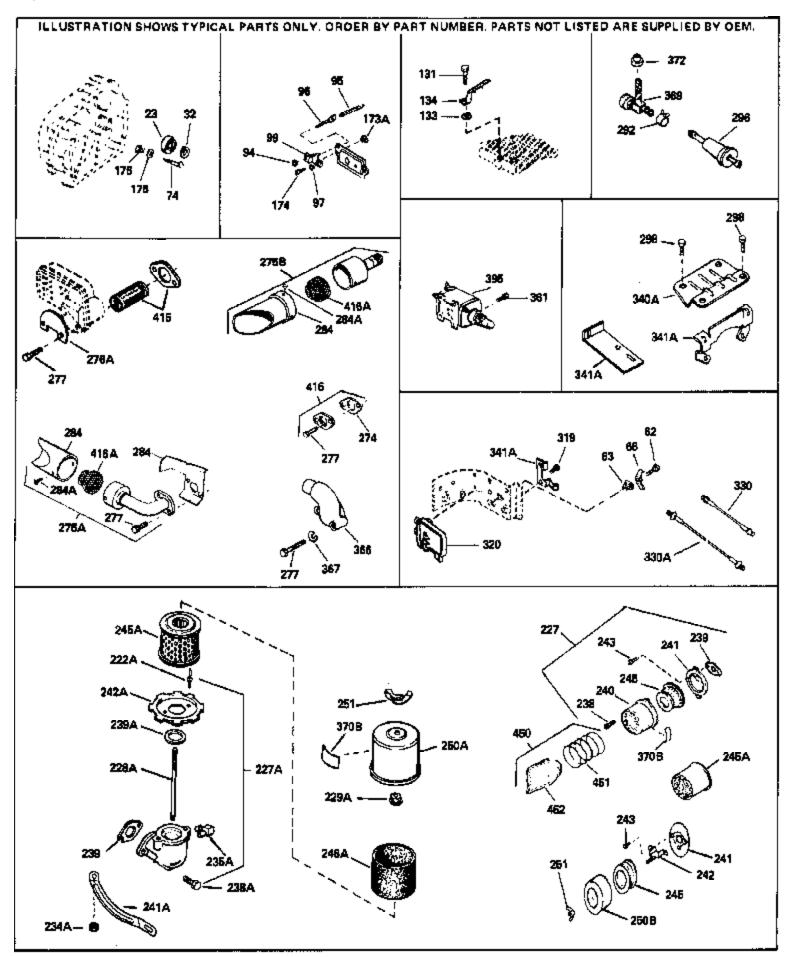

2333627Bearing, Ball3233628Washer, Thrust7431855Retainer, Bearing	
74 31855 Retainer Rearing	
97 Lockwasher, Heavy split	#10 (Buy loc ally)
131 650802 Screw, 1/4-20 x 5/8" (Us	
131 650737 Screw, 1/4-20 x 1/2" (Us	
131 650738 Screw, 1/4-20 x 5/8" (Us	e as required)
174 650128 Screw, 10-24 x 1/2"	
174 650597 Screw, 10-24 x 5/8"	
175 650778 Lockwasher	
176 650580 Nut, Lock, 10-24	
	38,239,240,241,243,245 & 370)
(Use as required)	
(Use as required)	
227 730164 Air Cleaner Ass'y. (Incl. 2	238, 239, 240, 241, 243 & 245) (Use
as required)	
228A 650824 Stud, 1/4-20 x 7.33 (Use	as required)
228A 650851 Stud, 1/4-20 x 8.1 (Use a	as required) (Used with drilled thru
elbow)	
239 27272A * Gasket, Air cleaner	
239 27272A * Gasket, Air cleaner	
241 33266 Bracket, Air cleaner	
242 33267 Bracket, Air cleaner	
243 28820 Screw, 10-32 x 1/2"	
245A 34700 Element, Air cleaner	
245 33268 Element, Air cleaner	
250B 33269A Cover, Air cleaner	
251 650513 Nut, Wing, 1/2-20	
274 35865 Gasket, Exhaust (Use as	s required)
275C 35824 Muffler (Optional quiet m	
	& 416A) (This spark arresting muffler
can be used on any mod	, , , , , , , , , , , , , , , , , , , ,
277A 650696 Screw, 5/16-18x2-3/4" (L	Jsed with 276A)
284 34390 Deflector, Exhaust	
292 26460 Clamp, Fuel line (Use as	; required)
298 650665 Screw, 1/4-15 x 7/8"	
	e used on HM80 with diecast starter.
,	
	e used on HM80 with stamped steel
recoil starter.	
395 33329D Starter Motor Kit (110-12	0 Volt) This 110-120 volt starter
	added to this engine. It can be
	sdrilled and tapped starter mounting
	ywheel. Refer to service number
stamped on end cap of r	motor, or on decal for identification.
Ref	
	ed on HM80 with stamped steel
recoil starter)	
	UNIO with atomaad ataal raadi
409 35569 Spacer (Can be used on	HM80 with stamped steel recoil
	HM80 with stamped steel recoil
409 35569 Spacer (Can be used on starter)	
409 35569Spacer (Can be used on starter)410 730573Debris Screen Kit (Incl. 3	60, 370B, 387, 411 &413) (Can be
409 35569 Spacer (Can be used on starter)	60, 370B, 387, 411 &413) (Can be
409 35569Spacer (Can be used on starter)410 730573Debris Screen Kit (Incl. 3 used on HM80 with start	60, 370B, 387, 411 &413) (Can be nped steel recoil starter)
409 35569Spacer (Can be used on starter)410 730573Debris Screen Kit (Incl. 3 used on HM80 with start	60, 370B, 387, 411 &413) (Can be

Ref #	Part Number 0	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572	Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

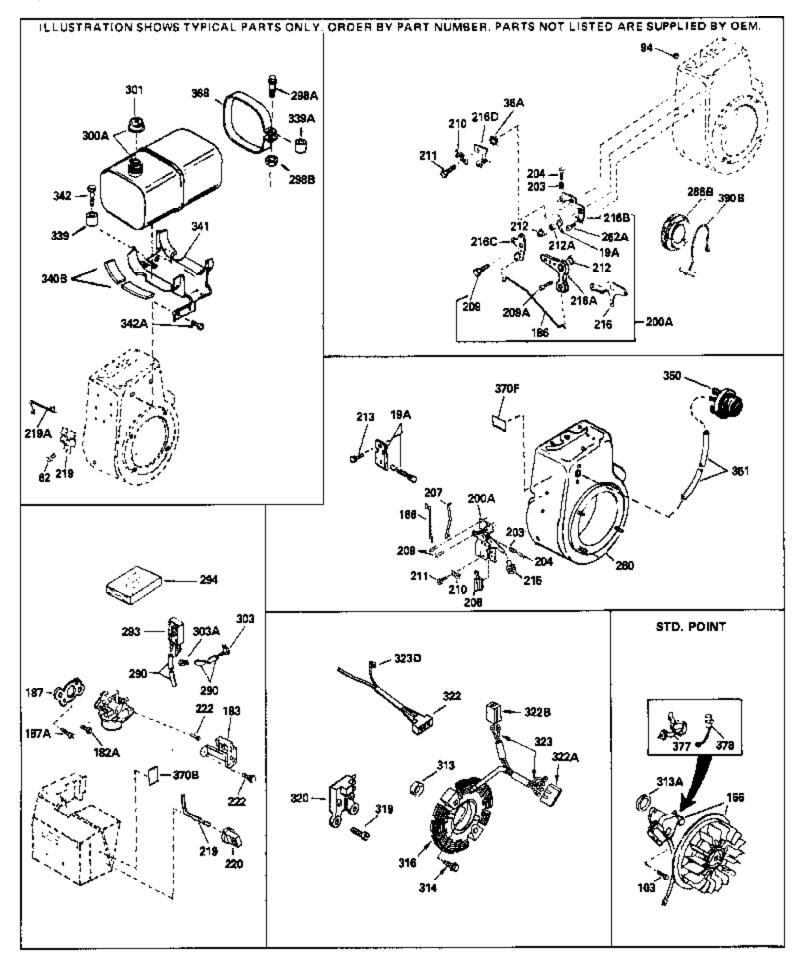

		y Description
	32977	Spring, Torsion
	650516	Screw, 1/4-20 x 1-1/8
156	610982	Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
1824	650517	Screw, 1/4-20 x 27/32"
	33372	Link, Governor lever-to-bellcrank
	34349A	Flange, Carburetor mounting
	30196	Screw, 5/16-18 x 3/4"
	730152	
2004	730132	Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A)
203	32924	Spring, Compression
204	650688	Screw, 10-32 x 1"
206	610973	Terminal Assy. (Use as required)
207	34350	Link, Governor-to-throttle
	30312	Screw, 10-32 x 1/2"
	28820	Screw
	28562	Bushing, RM. adjusting lever
	29530	Bushing, Bellcrank lever
	34351	Lever, Bellcrank
	30199A	Bracket, Speed adjusting (Incl.100 & 324)
	34352	Bracket, Idle adjust
	30201A	Lever, Speed control
	33375D	Blower Housing (For electric starter)
	650399	Screw, 10-32 x 5/8"
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	30063	Screw, Torx T-30, 1/4-20 x 1/2"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377	30547A	Contact Assy., Breaker
378	610767A	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).