


Ref #	Part Number Qty	
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
15A	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	
		Screw, 8-32 x 5/16"
	33578	Spring, Governor
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33624A	Crankshaft (Incl. 108 & 109)
	33628	Washer, Thrust
	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, # 8 E.T.
37	29216	Nut & Lockwasher, 10-32 "Keps"
37A	30322	Locknut, Hex "Keps", 8-32
38	29642	Ring, Retaining
40	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (0.10" OS)
	34334	• ,
		Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
72	27642	Plug, Oil drain
75	33625	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
		•
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650516	Screw, 1/4-20 x 1-1/8
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
	30831	Ground Wire
119	34041A	* Gasket, Head

Ref #	Part Number Q	ty Description
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	, , ,
	34035	Exhaust Valve (1/32" OS) (Incl. 151)
		Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
127	650691	Washer (Use as req., but not w/6021A screw)
128	650690	Washer, Belleville
129	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	
		Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
149	27882	Cap, Upper valve spring
150	27881	Spring, Valve
151	32581	Cap, Lower valve spring
169	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
		·
	650597	Screw, 10-24 x 5/8"
	30593	Clip, Primer line (Use as required)
	33263	* Gasket, Carburetor
	32924	Spring, Compression
	650688	Screw, 10-32 x 1"
	610973	Terminal Assy. (Use as required)
210	27793	Clip, Conduit
211	28942	Screw, 10-32 x 3/8"
211	28820	Screw
224	27915A	* Gasket, Intake pipe
	33375D	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	· · · · · · · · · · · · · · · · · · ·
		Hub & Screen Assy., Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)


		Qty Description
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	29673	* Gasket, Oil fill
310A		Dipstick (Incl. 306)
	32765	Clamp, Blower housing extension
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
		Screw, Torx T-30, 1/4-20 x 1/2"
	30063	
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	550223	Decal, Name
	34346	Decal, Instruction
	631725	Inlet Needle, Seat & Clip Assy.
380	632048	Carburetor (Incl. 184) (Refer to Division 5, Section A, page 164 for breakdown or Fiche18A-1, Grid E-11)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
	35570	Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
120	700072	HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref # Part Number	Qty Description
433 590636	Alternator Shaft (Use with engines equipped with stamped
	steel starter)(Use as required) (Refer to Mechanics
	Handbook for installation instructions).

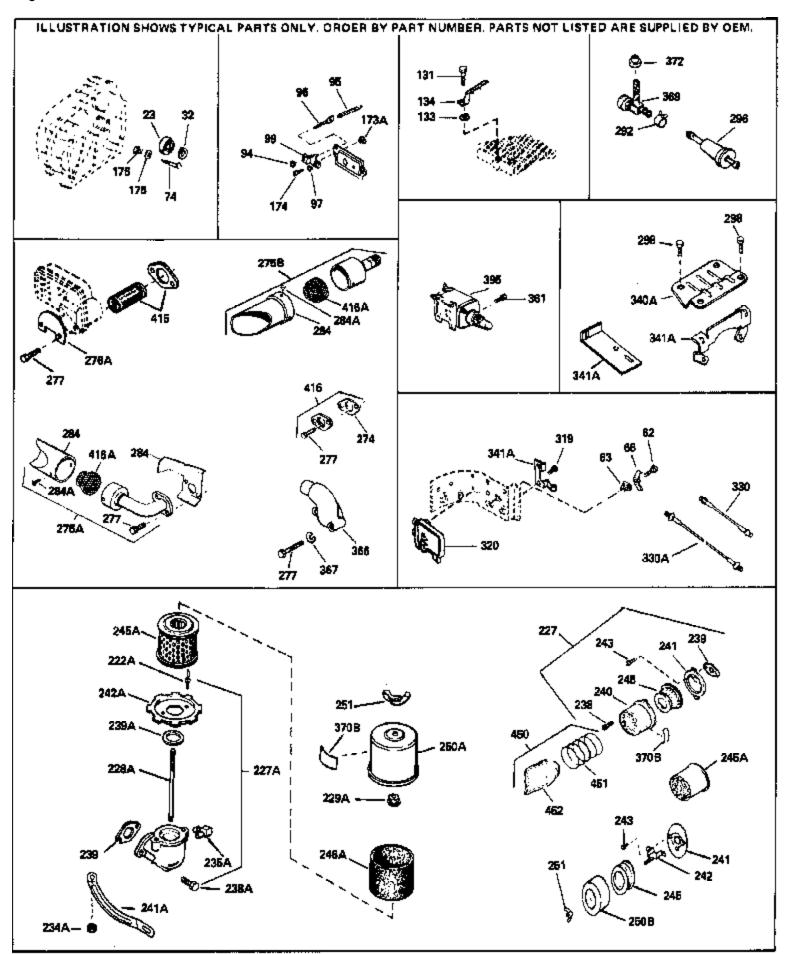

Ref #	Part Number Qty	Description
23	33627	Bearing, Ball
32	33628	Washer, Thrust
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	33356	Terminal, Ground
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	650778	Lockwasher
	650580	Nut, Lock, 10-24
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
221	130121	(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
228∆	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 7.33 (Use as required) (Used with drilled thru
220A	00001	elbow)
239	27272A	* Gasket, Air cleaner
239	27272A	* Gasket, Air cleaner
241	33266	Bracket, Air cleaner
242	33267	Bracket, Air cleaner
243	28820	Screw, 10-32 x 1/2"
245A	34700	Element, Air cleaner
245	33268	Element, Air cleaner
	33269A	Cover, Air cleaner
	650513	Nut, Wing, 1/2-20
	35865	Gasket, Exhaust (Use as required)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
275C	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	34390	Deflector, Exhaust
	26460	Clamp, Fuel line (Use as required)
	34279A	Filter, Inline fuel (Incl. 292)
	28820	Screw, 10-32 x 1/2"
	32765	Clamp, Blower housing extension
	610938	Regulator, Rectifier (7 Amp)
	30063	Screw, Torx T-30, 1/4-20 x 1/2"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel
3100	UTUUI	recoil starter.
395	35763A	Electric Starter Motor (12 Volt) (Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Refer to Division 5, Section D, Page 20 for breakdown or
		Fiche 18A-1, Grids G-9, G-10 or G-11)

Ref #	Part Number	Qty	Description
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

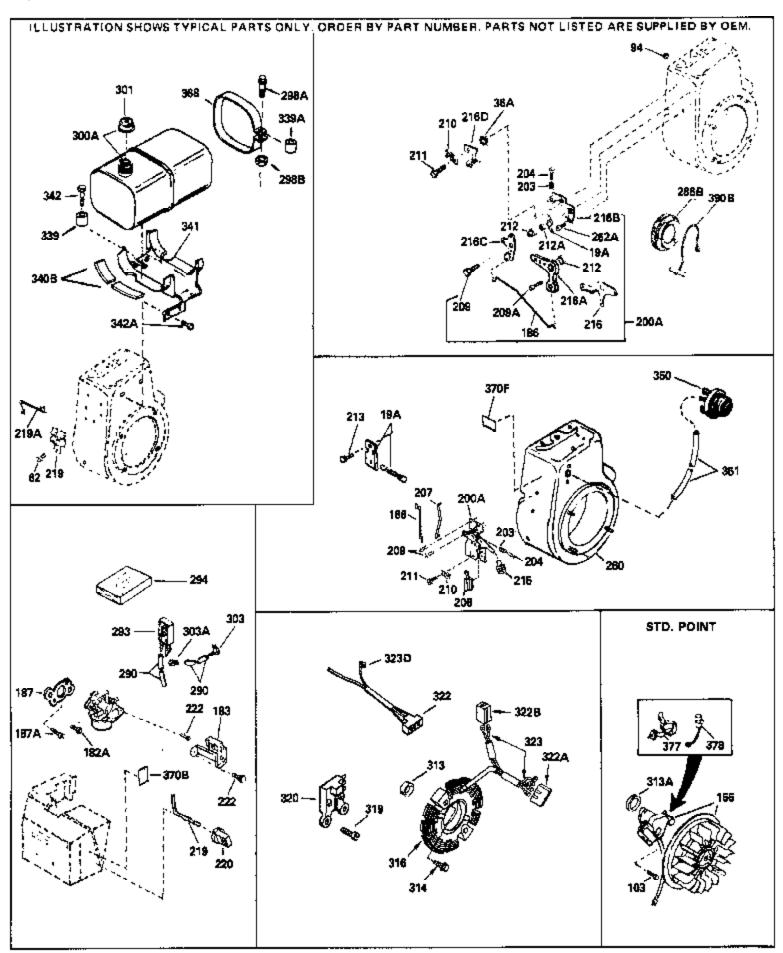

19A 62 103	Part Number 32977 650760 650516 610979	Qty	Description Spring, Torsion Screw, 8-32 x 3/8" Screw, 1/4-20 x 1-1/8 Magneto (w/ring gear) (12 Volt, 7 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
186 187 187A	650517 33372 34349A 30196 730152		Screw, 1/4-20 x 27/32" Link, Governor lever-to-bellcrank Flange, Carburetor mounting Screw, 5/16-18 x 3/4" Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A)
204 206 207 209A 210 211 211 212 212A 216D 216C 216B 216 260 262A 275C 277A 286B 290 290 290	32924 650688 610973 34350 30312 277793 28942 28820 29530 28562 34352 30201A 30199A 34351 33375D 650399 35824 650696 33662 29774 30705 30962 410144B 33032		Spring, Compression Screw, 10-32 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Screw Bushing, Bellcrank lever Bushing, RM. adjusting lever Bracket, Idle adjust Lever, Speed control Bracket, Speed adjusting (Incl.100 & 324) Lever, Bellcrank Blower Housing (For electric starter) Screw, 10-32 x 5/8" Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 319 320A 320 339 342 370J 370B	35355 33876 28820 32765 610938 35038 30063 34870 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Screw, 10-32 x 1/2" Clamp, Blower housing extension Regulator, Rectifier (7 Amp) Spacer, Tank Screw, Torx T-30, 1/4-20 x 1/2" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter. Contact Assy., Breaker
	610767A		Condenser

Ref #	Part Number	Qty Description	
408	35570	Screen Seal (Can be used on HM80 with stamped recoil starter)	d steel
409	35569	Spacer (Can be used on HM80 with stamped stee starter)	el recoil
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413 used on HM80 with stamped steel recoil starter)) (Can be
411	35568	Debris Screen (Can be used on HM80 with stamp recoil starter)	ed steel
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 wistamped steel recoil starter)	ith
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be HM80 with die cast starter)	used on
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required Mechanics Handbook for installation instructions).	
430	611077	Alternator, Add on (Use as required) (Refer to Med Handbook for installation instructions).	chanics
431	590609	Centering tube (Use with engines equipped with d aluminum starter)(Use as required) (Refer to Mech Handbook for installation instructions)	
431	590610	Centering tube (Use as required) (Refer to Mechar Handbook for installation instructions).	nics
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).	
432	611079	D.C. Charging Connector (Use as required) (Refer Mechanics Handbook for installation instructions).	
433	590611	Alternator Shaft (4.00") (Use with engines equippe aluminum starter)(Use as required) (Refer to Mech Handbook for installation instructions).	
433	590636	Alternator Shaft (Use with engines equipped with s steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).	