


		/ Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
	30968	Nipple, Pipe
	30969	Cap, Oil drain
	650494	•
		Screw, 6-40 x 5/16"
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	30700	Yoke, Governor
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33459A	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, # 8 E.T.
37	29216	Nut & Lockwasher, 10-32 "Keps"
37A	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
42	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
48	34034	Lifter, Valve
49	34242	Dipper, Oil
50	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	
		Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
83	30588A	Spool, Governor
84	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
92	650815	Washer, Belleville
		Nut $L(\alpha_1/1/2)$
93	8116	Nut, Hex (1/2-20)
93 101	8116 610118 650489	Cover, Spark plug (Use as required)

		Description
108 2	29783	Pin, Crankshaft gear
109 3	33245	Gear, Crankshaft
110 3	34240	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126 3		Intake Valve (Std.) (Incl. 151)
126 3		Intake Valve (1/32" OS) (Incl. 151)
127A 2		Washer, Flat (Use as required)
127A 2		Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	
		Washer, Belleville
	550727	Screw, 5/16-18 x 1-3/4" (Use as required)
	650694A	Screw, 5/16-18 x 2" (Use as required)
130A 6	5021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
131A 6	650713	Screw, 5/16-18 x 5/8" (Use as require d)
131A 7		Screw, $5/16-18 \times 7/8"$ (Use as require d)
	650802	Screw, $1/4-20 \times 5/8"$ (Use as required)
	650737	Screw, $1/4-20 \times 1/2$ " (Use as required)
	650738	Screw, $1/4-20 \times 5/8"$ (Use as required)
135 3		Resistor Spark Plug (RJ17LM)
139 3		Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
140 C		
149A		Seal Assy., Intake valve
		Cap, Upper valve spring
150 2		Spring, Valve
151 3		Cap, Lower valve spring
	27896A	* Gasket, Breather cover
170 2		Body, Breather
171 2		Element, Breather
172 2		Cover, Valve spring
173 3		Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178 2		Nut & Lockwasher, 1/4-28
179B 3	30593	Clip, Primer line (Use as required)
182 3	30088A	Screw, 1/4-28 x 1"
184 3	33263	* Gasket, Carburetor
185 3	33877	Pipe, Intake
203 3	31342	Spring, Compression
204 6	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	33756A	Muffler
275 C		
		Muffler (Optional quiet muffler)
276 3		Plate, Muffler locking
	650729	Screw, 5/16-18 x 3-3/16"
	020030	Screw, 5/16-18x2-3/4" (Used with 276A)
277A 6		· · · · · · · · · · · · · · · · · · ·
281 3		Cover, Starter bubble Screw, 8-32 x 3/8"


Ref #	Part Number	y Description	n
	33662		reen Assy., Starter
	29752		
			kwasher, 1/4-28
	29774		(Braided 8-1/4")(21 cm)(As req.)
290	30705	Fuel Line ((Braided 16")(41 cm)(Use as req.)
290	30962	Fuel Line ((Braided 32")(81 cm)(Use as req.)
	26460		el line (Use as required)
	650665	Screw, 1/4	
	34156A		
300	34130A		(Incl. 292 & 301) NOTE: These tanks were
			fferent size fuel inlet openings. Tanks with the
			o. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D.	opening use fuel cap 35355.
201	4404 440		(1/h)
	410144B		(White Plastic)(Std)(1-1/2" I.D.)
301	33032		(Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)	
201	34210	Fuel Con ((Red Plastic) (Spurt Resistant, High Profile)
301	34210		· · · · · · · · · · · · · · · · · · ·
		(1-3/16" I.C	J)
301	35355	Fuel Cap ((Red plastic) (1-1/2" I.D.)
	33893A	Tube, Oil f	
			11
	33590	"O" Ring	
	34011A	Dipstick (Ir	
	29443	Clip, Fuel I	line (Use as required)
325	34246	Clip, Grour	nd wire (Use as required)
336	650765	Screw, 10-	-32 x 1/2"
	34666	Cover, Car	
	28942	Screw, 10-	
	34154		I tank mounting
			•
	34155		uel tank mounting
	650561	Screw, 1/4	
	33384	Guard, Sta	
	32576	Seal, Snov	
364	33377	Bracket, C	arburetor cover mounting
365	650767	Screw, 8-3	32 x 27/64"
370E	34679	Decal, Cho	oke
	34870		truction Can be used on HM80 with diecast starter.
	34144	Decal, Prir	
	34414	Decal, Wa	
	34346	Decal, Inst	
	631021		le, Seat & Clip Assy.
380	632111		r (Incl. 184) (Refer to Division 5, Section A, page
		170 for bre	eakdown or Fiche18A-1, Grid F-1)
200	590479	Rowind St	arter (Refer to Division 5, Section C, page 30 for
390	590479		
		DIEGKOOW	n or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Se	et (Incl. items marked*)
	35570		al (Can be used on HM80 with stamped steel
-100		recoil start	
409	35569	Spacer (Ca	an be used on HM80 with stamped steel recoil
		starter)	·
410	730573		reen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on H	M80 with stamped steel recoil starter)
A A A	25569	Dobria Car	con (Con be used on UNIO) with stomped steel
411	35568		een (Can be used on HM80 with stamped steel
		recoil start	er)
<u>4</u> 13	650907	Screw 5/1	6-18 x 1-5/8" (Can be used on HM80 with
TIV			steel recoil starter)
		stamped s	

Ref #	Part Number	Qty Description
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

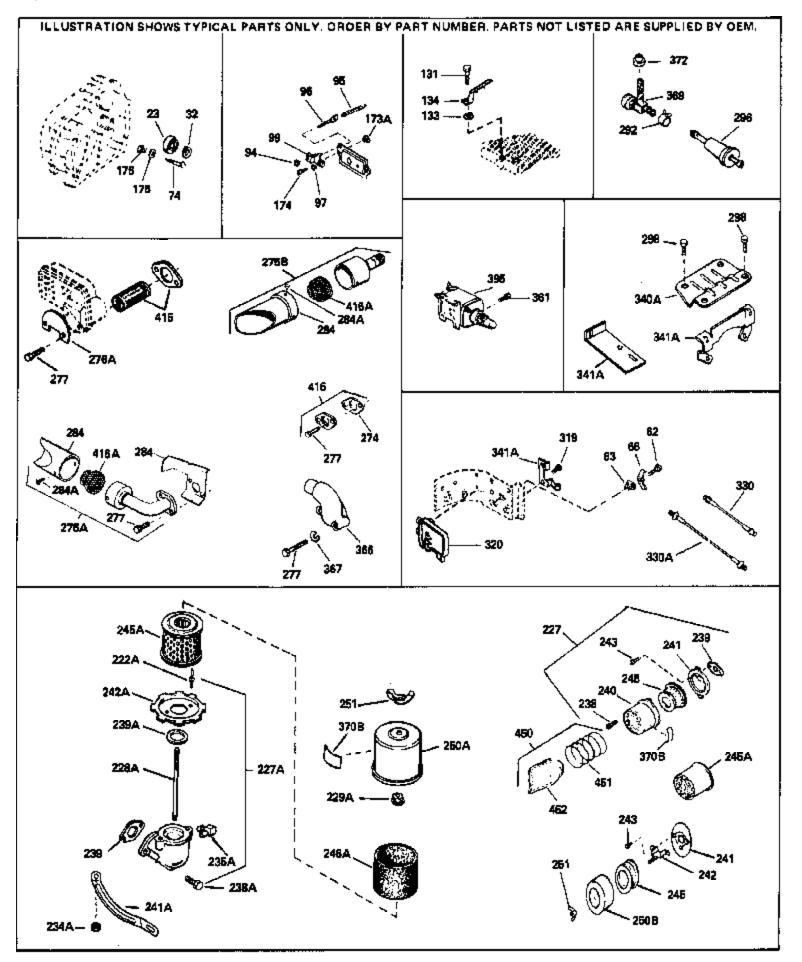

		Description
	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	33356	Terminal, Ground
	31855	Retainer, Bearing
97	31005	
	050000	Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
	100121	(Use as required)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275C	35824	Muffler (Optional quiet muffler)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2100	001020	can be used on any model.)
		can be used on any model.
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
277	650729	Screw, 5/16-18 x 3-3/16"
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	34870	
		Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
305	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
888	000200	motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
400	25570	Contain Cool (Containing the state of the st
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
409	33309	
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
.10	· · · · · · ·	used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
		,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
A 4 🗖	720120	Fuch Adoptor (/it /log) 074 077)//log op man)
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
		HM80 with die cast starter)
100	650868	Scrow 8-18 x 1-1/8" (2 Daguirad) (1 los os requirad) (Defer to
429	UJUUUU	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

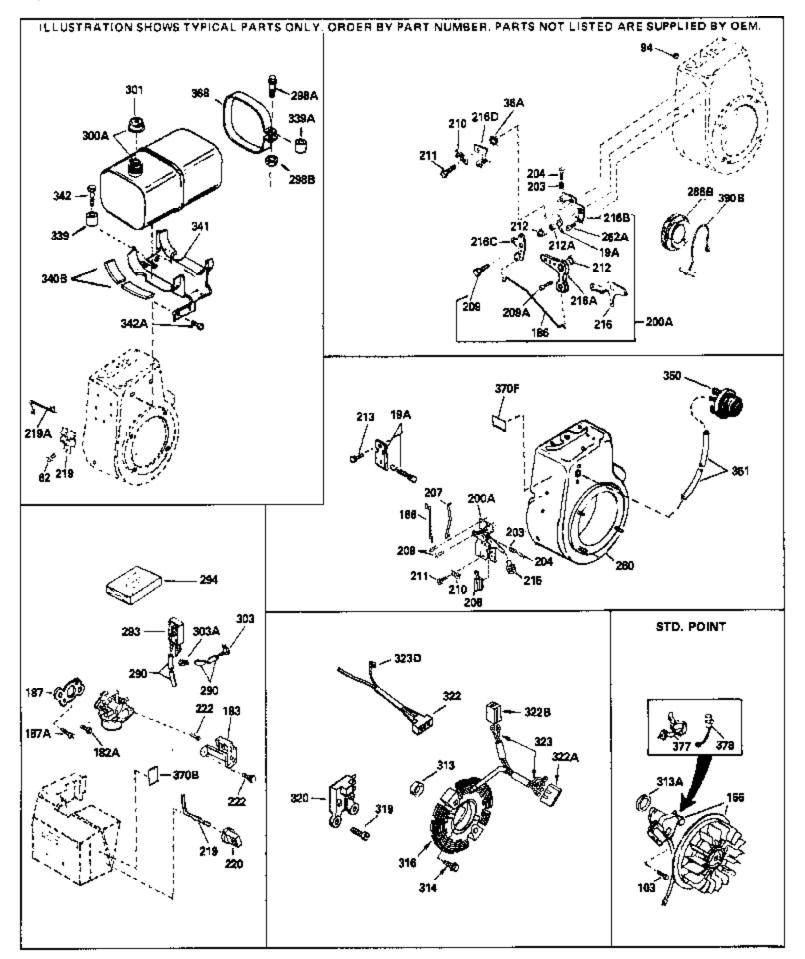

Ref #	Part Number C	Ity Description
	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
156	610848	Magneto (w/ring gear for 110 volt sta rter) NOTE: The
		complete magneto is not available as an assembly. The
		magneto number is shown for reference purposes only. Order
		component parts individually, as shown in parts list. (Refer to
		Division 5, Section B, page 28 for breakdown or Fiche 18A-1,
		Grid G
100	24507	Brooket Choke
	34587 34667	Bracket, Choke Link, Governor
	34677	
	31342	Control Bracket (Incl.19,19A,203,204, 206,209)
	650549	Spring, Compression
	610973	Screw, 5-40 x 7/16"
	33878	Terminal Assy. (Use as required) Link, Governor-to-throttle
	650821	
	32410	Screw, 10-32 x 1/2" Knob, Control
	34586	
	35438	Rod, Choke Knob, Control
	28820	Screw, 10-32 x 1/2"
	35447A	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
501	34210	(1-3/16" I.D)
	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570682	Primer Assy.
	32180C 34387	Primer Line
3/UD	54507	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	30547A	Contact Assy., Breaker
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
<u>⊿</u> 1∩	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
10		used on HM80 with stamped steel recoil starter)
лал	25569	· /
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).