


	Part Number Qt	
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15A	30700	Yoke, Governor
15B	650494	Screw, 6-40 x 5/16"
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
19	33578	Spring, Governor
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
	33624A	Crankshaft (Incl. 108 & 109)
	33628	Washer, Thrust
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
	27642	Plug, Oil drain
	33625	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor Bing, Betaining
	29193	Ring, Retaining
	650833 650822	Screw, 1/4-20 x 1-3/16" Scrow, 1/4-20 x 1-11/16"
	650832 32580	Screw, 1/4-20 x 1-11/16" Kov, Ehwhool
	32589	Key, Flywheel Washer, Belloville
	650815 8116	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	27276	Cover, Spark plug
	610118 650480	Cover, Spark plug (Use as required)
	650489 29783	Screw, 1/4-20 x 5/8" Pin, Crankshaft gear
	33245	Pin, Crankshaft gear Gear, Crankshaft
	30831	Ground Wire
10		

		y Description
119	34041A	* Gasket, Head
120	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
120 127A		
		Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as required)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, $1/4-20 \times 5/8"$ (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
140	650836	Screw, 10-24 x 1/2"
149	27882	Cap, Upper valve spring
149A	27882	Cap, Upper valve spring
150	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	
		Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
179B		Clip, Primer line (Use as required)
	33263	* Gasket, Carburetor
203	32924	Spring, Compression
204	650688	Screw, 10-32 x 1"
206	610973	Terminal Assy. (Use as required)
211	28820	Screw
	27915A	* Gasket, Intake pipe
	33375D	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
275C		Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	30196	Screw, 5/16-18 x 3/4"
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
286B		Hub & Screen Assy., Starter
287	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"

		ty Description
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
306 310 325 325 340 341 342 370J 370A 370A 370 379 379	35355 29673 31297 29443 34246 34154 34155 650561 34870 550223 34346 631725 631021 632048	Fuel Cap (Red plastic) (1-1/2" I.D.) * Gasket, Oil fill Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Inlet Needle, Seat & Clip Assy. Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 164 for breakdown or Fiche18A-1, Grid E-11)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570	Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).


Ref #	Part Number	Qty	Description
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

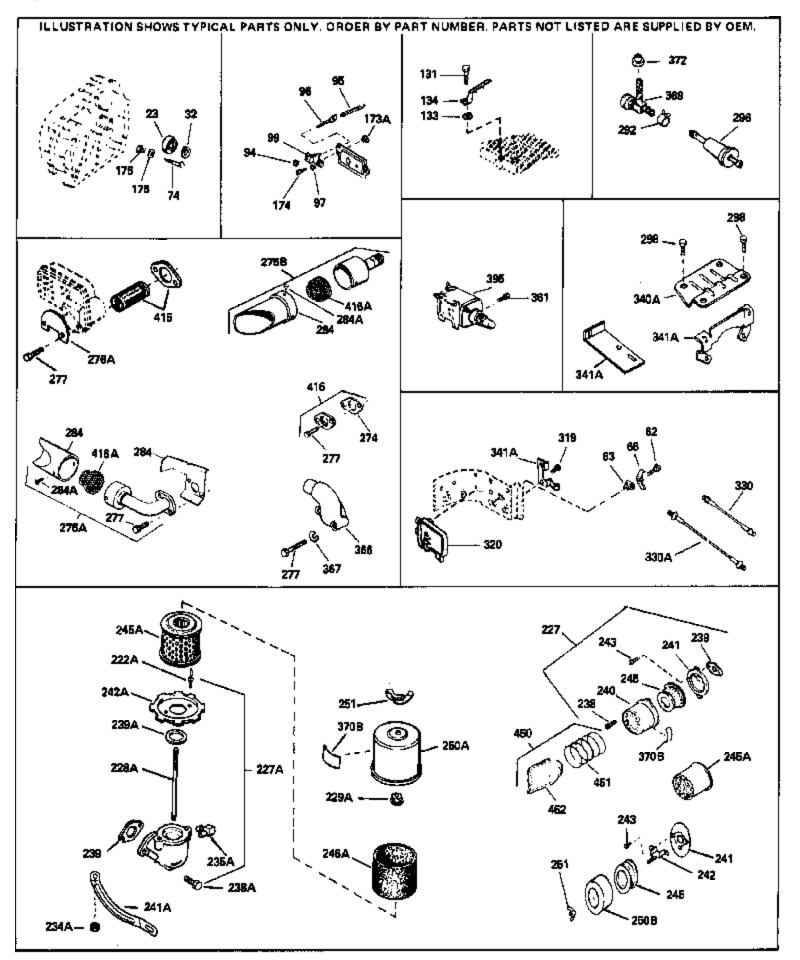

	Part Number Qty	
	33627	Bearing, Ball
	33628	Washer, Thrust
	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
68	33356	Terminal, Ground
74	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, $1/4-20 \times 1/2"$ (Use as required)
	650738	Screw, $1/4-20 \times 5/8$ " (Use as required)
	650890	Washer, Lock, 5/16"
	30747	Clip, Spark plug shorting
	650128	Screw, $10-24 \times 1/2$ "
	650597	Screw, 10-24 x 5/8"
	650778	Lockwasher
	650580	Nut, Lock, 10-24
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
/		as required)
· · · ·	05000/	
	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
239	27272A	* Gasket, Air cleaner
	27272A	* Gasket, Air cleaner
	33266	Bracket, Air cleaner
	33267	Bracket, Air cleaner
	28820	Screw, 10-32 x $1/2$ "
	34700	
		Element, Air cleaner
	33268	Element, Air cleaner
	33269A	Cover, Air cleaner
	650513	Nut, Wing, 1/2-20
	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
275A	33714	Muffler (Incl. 284, 284A & 416A)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	30196	Screw, 5/16-18 x 3/4"
	33700	Cover & Tube, Muffler
	34390	Deflector, Exhaust
	650578	Screw, 8-18 x 3/8"
	26460	Clamp, Fuel line (Use as required)
	650665	
		Screw, 1/4-15 x 7/8"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
3/UB	34387	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref

Ref

Ref #	Part Number	Qty	Description
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
	33323		Screen, Muffler
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

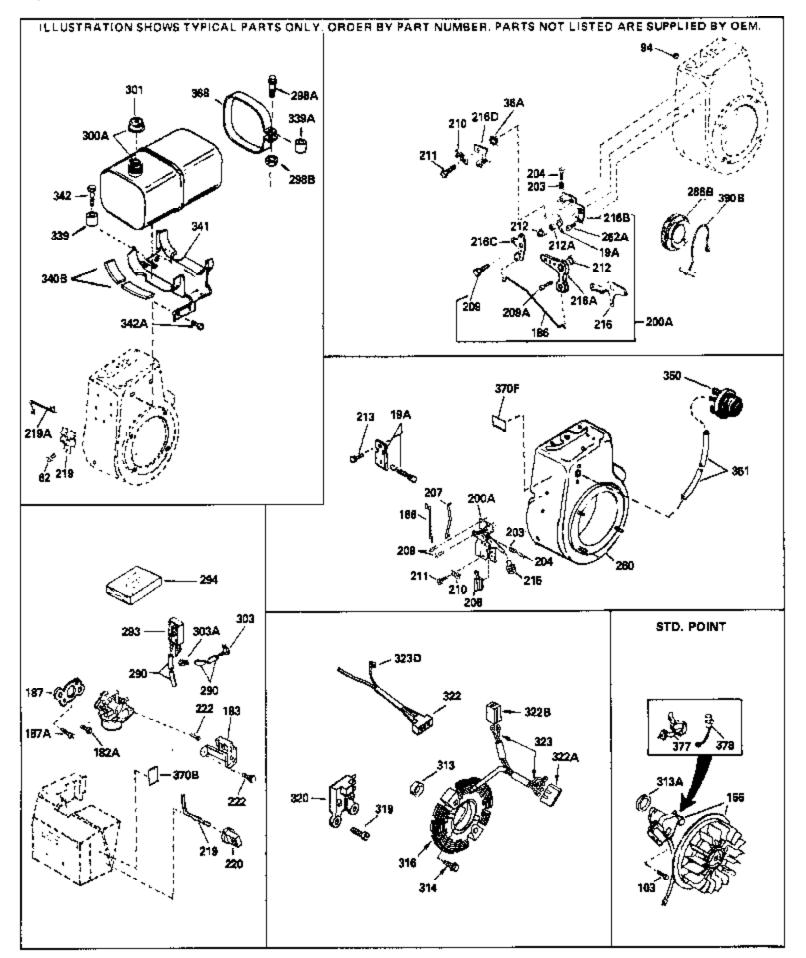

		Qty Description
	32977	Spring, Torsion
62	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
	610842	Magneto (Incl. 377 & 378) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G-1)
	650517	Screw, 1/4-20 x 27/32"
186	33372	Link, Governor lever-to-bellcrank
187	34349A	Flange, Carburetor mounting
187A	30196	Screw, 5/16-18 x 3/4"
	730152	Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A,
200, (216B, 216C & 262A)
	32924	Spring, Compression
204	650688	Screw, 10-32 x 1"
206	610973	Terminal Assy. (Use as required)
207	34350	Link, Governor-to-throttle
	30312	Screw, 10-32 x 1/2"
	28820	Screw
	28562	Bushing, RM. adjusting lever
	29530	Bushing, Bellcrank lever
	30201A	Lever, Speed control
	34351	
		Lever, Bellcrank
	34352	Bracket, Idle adjust
	30199A	Bracket, Speed adjusting (Incl.100 & 324)
	33375D	Blower Housing (For electric starter)
	650399	Screw, 10-32 x 5/8"
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
290	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
293	35813	Fuel pump, Impulse
294	33010	Repair Kit, Fuel pump
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16'
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
	05055	(1-3/16" I.D)
	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	34237	Fitting, Fuel
	33713	Fitting, Elbow
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
342	650561	Screw, 1/4-20 x 5/8"
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	30547A	Contact Assy., Breaker
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel recoil starter)

73	Spacer (Can be used on HM80 with stamped steel recoil starter) Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
3	
	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
56 77 70 99 10 78	8 7 9 0 8 9