


	Part Number Qty	
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
	650494	Screw, 6-40 x 5/16"
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	30700	Yoke, Governor
	33454	
		Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	33365B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	· · · ·
		Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
41	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
50	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
61	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
82	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-3/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
101	610118	Cover, Spark plug (Use as required)
103	650489	Screw, 1/4-20 x 5/8"
	29783	Pin, Crankshaft gear
108	20100	

	Part Number Qt	
110	34240	Ground Wire
119	34041A	* Gasket, Head
120	34030A	Head, Cylinder
125	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
127A	26073	Washer, Flat (Use as required)
127A	650570	Washer, Flat (Use as required)
127	650691	Washer (Use as req., but not w/6021A screw)
128	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as required)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, $1/4-20 \times 3/2$ (Use as required)
	650738	Screw, $1/4-20 \times 1/2$ (Use as required)
	650713	Screw, $5/16-18 \times 5/8"$ (Use as required)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 1/2 Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Tors T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	34145	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	34185A	Muffler (Spark Arresting)
	35824	
	31588	Muffler (Optional quiet muffler)
		Plate, Muffler locking
	650696 650720	Screw, 5/16-18x2-3/4" (Used with 276A)
	650729 22012	Screw, 5/16-18 x 3-3/16"
	33013	Cover, Starter bubble
202	650760	Screw, 8-32 x 3/8"


Ref #	Part Number C	Qtv	Description
	33662	~•7	Hub & Screen Assy., Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
301	33032		
			I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
204	25255		Fuel Cap (Pad plactic) (1.1/2" LD)
	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A		Tube, Oil fill
	33590		"O" Ring
	34011A		Dipstick (Incl. 306)
	29443		Clip, Fuel line (Use as required)
	34246		Clip, Ground wire (Use as required)
	650765		Screw, 10-32 x 1/2"
337	34666		Cover, Carburetor
338	28942		Screw, 10-32 x 3/8"
340	34154		Plate, Fuel tank mounting
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
	34141		Guard, Starter
	32576		Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	631021		Inlet Needle, Seat & Clip Assy.
	632111		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
500	052111		170 for breakdown or Fiche18A-1, Grid F-1)
390	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for
			breakdown or Fiche 18A-1, Grid G-5)
100	33279G		Gasket Set (Incl. items marked*)
	35570		
408	30070		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
110	720572		
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
			used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
	050007		,
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
			stamped steel recoil starter)
420	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
ן ∠ ו≃			

Ref #	Part Number	Qty Description
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

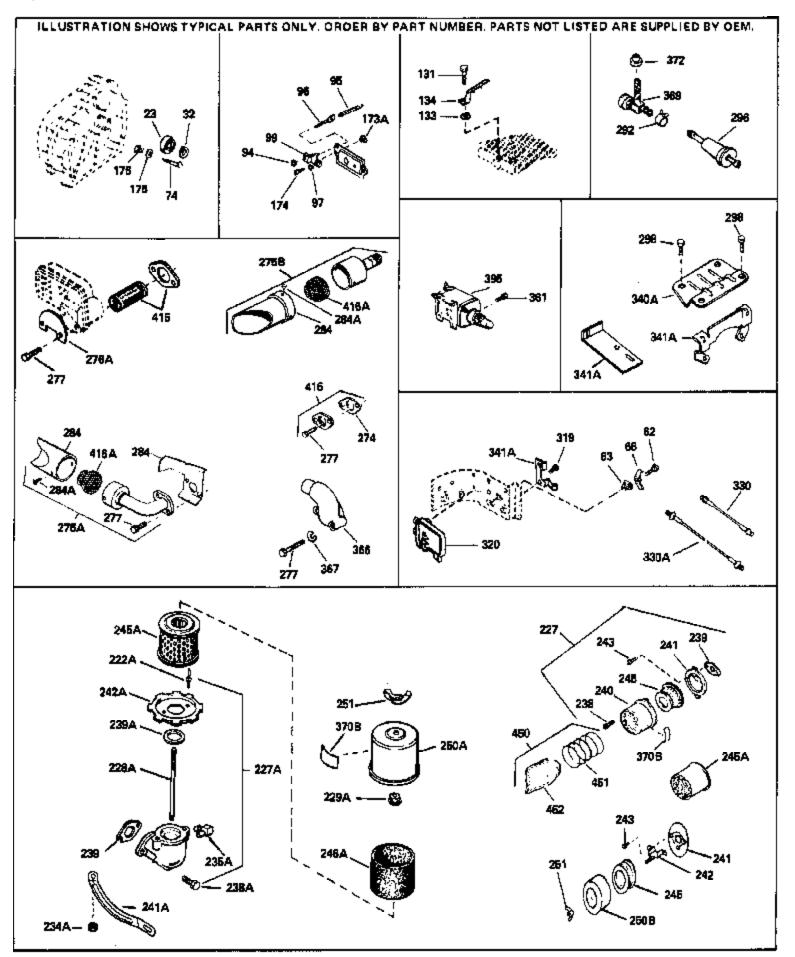

		/ Description
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	31855	Retainer, Bearing
	31000	
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
ZZðA	1 COUCO	
		elbow)
0454	24700	Floment Air closer
	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
		can be used on any model.
275C	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100		
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	130313	
		used on HM80 with stamped steel recoil starter)
111	35568	Debric Screen (Can be used on UM90 with stamped steel
411	30300	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	660007	Porous E/16 10 x 1 E/01/ (Con be used as LIN 100 with
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
- /		· ,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
0		HM80 with die cast starter)
		I INIOU WILLI UIE VASI SIALIEL
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
-120		
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

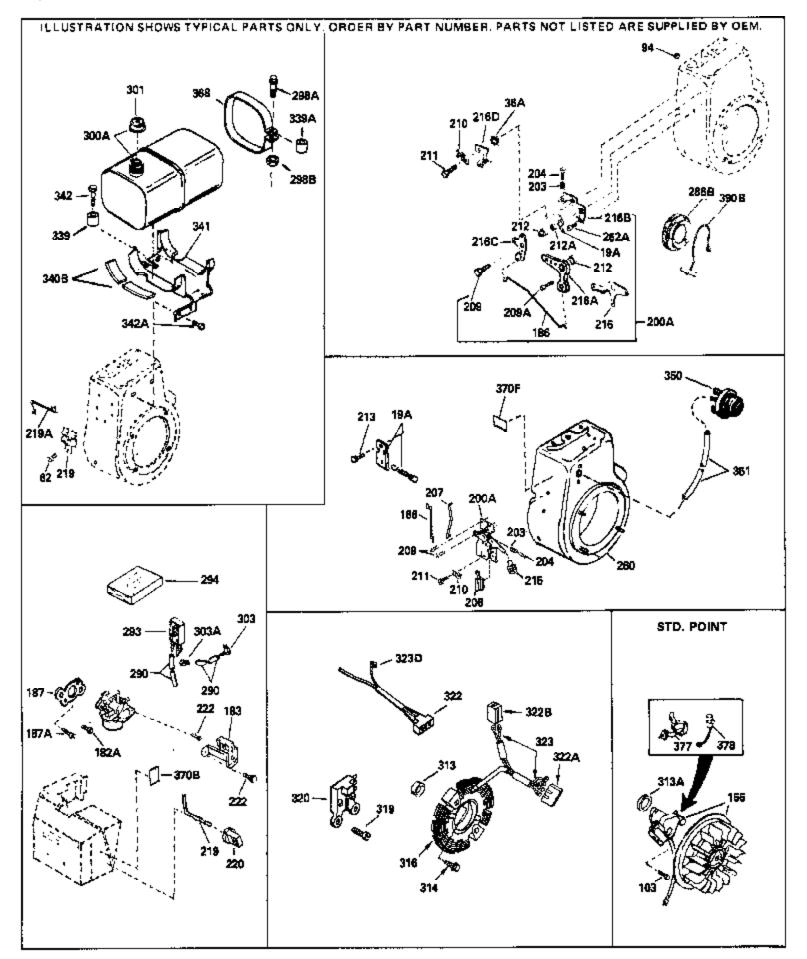

	Dout Number	Ot . Description
		Qty Description
	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
156	610848	Magneto (w/ring gear for 110 volt sta rter) NOTE: The
		complete magneto is not available as an assembly. The
		magneto number is shown for reference purposes only. Order
		component parts individually, as shown in parts list. (Refer to
		Division 5, Section B, page 28 for breakdown or Fiche 18A-1,
		Grid G
193	34587	Bracket, Choke
	33371	Link, Governor
	34667	Link, Governor
	34664	Control Bracket (Incl.19,203,204,206, 209)
203	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
	650821	Screw, 10-32 x 1/2"
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	34145	Blower Housing (For electric starter)
275C	35824	Muffler (Optional quiet muffler)
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
286B	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	
		Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
501	34210	
		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	•
		Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570629A	Primer Assy.
	32180C	Primer Line
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
	24070	Deed Instruction Can be used as LIN/00 with discost states
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	30547A	Contact Assy., Breaker
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
100	05500	
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
/10	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	10010	
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)

Ref #	Part Number	Qty	Description
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).