

Ref #	Part Number Q	ty Description
	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652	Pin, Dowel
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	30700	Yoke, Governor
	650494	Screw, 6-40 x 5/16"
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	33578	Spring, Governor
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33624A	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
	27642	Plug, Oil drain
	33625	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650489	Screw, 1/4-20 x 5/8"
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
	30831	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
120		

Ref #	Part Number	Qty	Description
125	27878A		Exhaust Valve (Std.) (Incl. 151)
125	27880A		Exhaust Valve (1/32" OS) (Ind. 151)
126	34035		Intake Valve (Std.) (Incl. 151)
	34036		Intake Valve (1/32" OS) (Incl. 151)
	26073		Washer, Flat (Use as required)
	650570		Washer, Flat (Use as required)
	650691		Washer (Use as req., but not w/6021A screw)
	650690		Washer, Belleville
	650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1	002.77		650691 washer)
130	650694A		Screw, 5/16-18 x 2" (Use as required)
131A	650713		Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028		Screw, 5/16-18 x 7/8" (Use as require d)
131	650802		Screw, 1/4-20 x 5/8" (Use as required )
131	650737		Screw, 1/4-20 x 1/2" (Use as required )
131	650738		Screw, 1/4-20 x 5/8" (Use as required )
135	33636		Resistor Spark Plug (RJ17LM)
	33369		Bracket, Governor gear
	650836		Screw, 10-24 x 1/2"
	27882		Cap, Upper valve spring
	27882		Cap, Upper valve spring
	27881		Spring, Valve
	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	30593		Clip, Primer line (Use as required)
	33263		* Gasket, Carburetor
	32924		Spring, Compression
	650688		Screw, 10-32 x 1"
	610973		Terminal Assy. (Use as required)
	27793		Clip, Conduit
	28942		Screw, 10-32 x 3/8"
	28820		Screw
	27915A		* Gasket, Intake pipe
	33375D		Blower Housing (For electric starter)
	650788		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
	35824		Muffler (Optional quiet muffler)
	50624 650696		
			Screw, 5/16-18x2-3/4" (Used with 276A)
	33662 30753		Hub & Screen Assy., Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460 440444B		Clamp, Fuel line (Use as required)
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)


Ref #	Part Number	Qty Description
	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
306 310 320A 325 325 342 370J 370A 370 379	35355 29673 31297 32765 29443 34246 30063 34870 550223 34346 631021 632082	Fuel Cap (Red plastic) (1-1/2" I.D.)  * Gasket, Oil fill Dipstick (Incl. 306) Clamp, Blower housing extension Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Screw, Torx T-30, 1/4-20 x 1/2" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Name Decal, Instruction Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 168 for breakdown or Fiche18A-1, Grid E-13)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570	Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref # Part Number	Qty Description
433 590636	Alternator Shaft (Use with engines equipped with stamped
	steel starter)(Use as required) (Refer to Mechanics
	Handbook for installation instructions).



Def #	Dout Ni week ou	· Description
		Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97	05000	Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required )
	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
007	700404	Air Olasman Apalis (Inal 200, 200, 240, 244, 242, 9, 245) (Usa
221	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
220/1	000001	elbow)
		CISOW)
239	27272A	* Gasket, Air cleaner
239	27272A	* Gasket, Air cleaner
241	33266	Bracket, Air cleaner
242	33267	Bracket, Air cleaner
	28820	Screw, 10-32 x 1/2"
	34700	Element, Air cleaner
	33268	Element, Air cleaner
	33269A	Cover, Air cleaner
	650513	Nut, Wing, 1/2-20
	35865	Gasket, Exhaust (Use as required)
	391026	• •
2100	391020	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
275C	35824	Muffler (Optional quiet muffler)
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	34279A	Filter, Inline fuel (Incl. 292)
	28820	Screw, 10-32 x 1/2"
	610938	Regulator, Rectifier (7 Amp)
	32765	Clamp, Blower housing extension
	30063	Screw, Torx T-30, 1/4-20 x 1/2"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
		•
3/05	34387	Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
		recoil starter.
395	35763A	Electric Starter Motor (12 Volt) (Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Refer to Division 5, Section D, Page 20 for breakdown or
		Fiche 18A-1, Grids G-9, G-10 or G-11)
	0000B	
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
<i>1</i> 00	35570	Screen Seal (Can be used on HM90 with stamped stack
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
		,

Ref#	Part Number	Qty	Description
410	730573	_	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
415	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

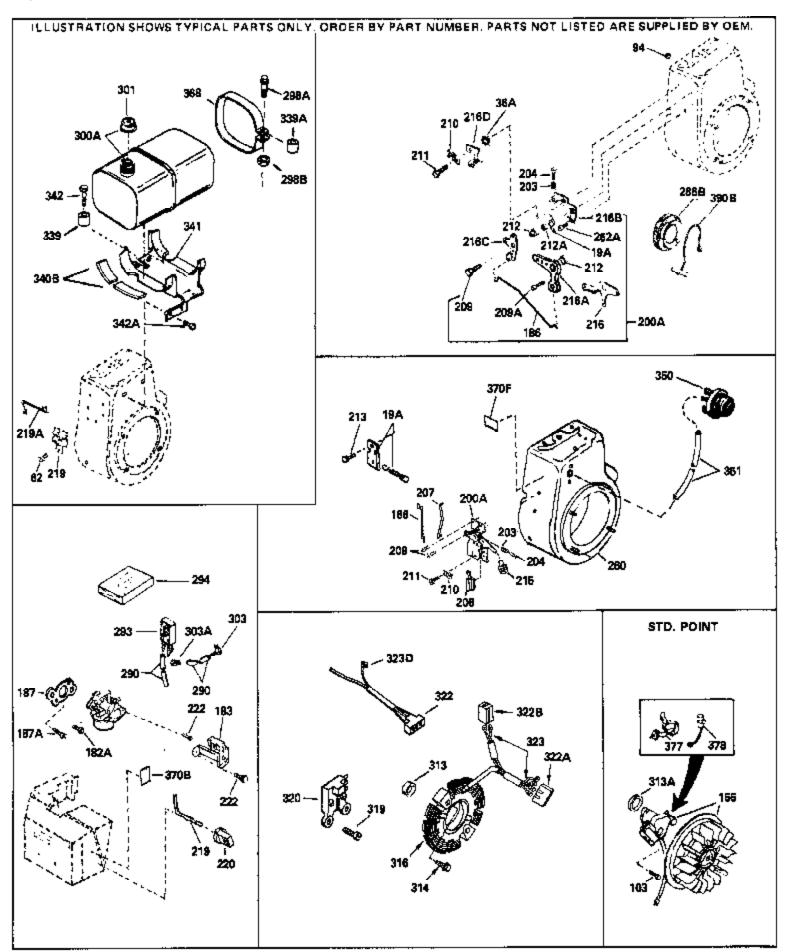

19A 62 103	Part Number 32977 650760 650489 610979	Qty	Description  Spring, Torsion  Screw, 8-32 x 3/8"  Screw, 1/4-20 x 5/8"  Magneto (w/ring gear) (12 Volt, 7 Amp ) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
186 187 187A	650517 33372 34349A 30196 730152		Screw, 1/4-20 x 27/32" Link, Governor lever-to-bellcrank Flange, Carburetor mounting Screw, 5/16-18 x 3/4" Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A)
204 206 207 209A 210 211 211 212 212A 216D 216C 216B 216 260 262A 275C 277A 286B 290 290	27793 28942 28820 29530 28562 34352 30201A 30199A 34351 33375D 650399 35824 650696		Spring, Compression Screw, 10-32 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Screw Bushing, Bellcrank lever Bushing, RM. adjusting lever Bracket, Idle adjust Lever, Speed control Bracket, Speed adjusting (Incl.100 & 324) Lever, Bellcrank Blower Housing (For electric starter) Screw, 10-32 x 5/8" Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 319 320A 320 339 342 370J 370B	28820 32765 610938 35038 30063 34870		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Screw, 10-32 x 1/2" Clamp, Blower housing extension Regulator, Rectifier (7 Amp) Spacer, Tank Screw, Torx T-30, 1/4-20 x 1/2" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter. Contact Assy., Breaker
	610767A		Condenser

	Part Number	Qty	Description
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).