


Ref #	Part Number C	(ty	Description
1	34348B		Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652		Pin, Dowel
3	650820		Screw, 1/4-20 x 1/2"
15	30699C		Rod Assy., Governor (Incl. 15A & 15B)
	650494		Screw, 6-40 x 5/16"
15A	30700		Yoke, Governor
	33454		Governor Lever Assy.
	29916		Clamp, Governor lever
	650548		Screw, 8-32 x 5/16"
	34663		Spring, Speed control
	32630		Seal, Oil
	35256A		Baffle, Blower housing
	650561		Screw, 1/4-20 x 5/8"
	33365B		Crankshaft (Incl. 108 & 109)
	29826		Screw, 10-32 x 3/4"
	29918		Lockwasher, #8 E.T.
	30322		Locknut, Hex "Keps", 8-32
	29216		Nut & Lockwasher, 10-32 "Keps"
	29642		Ring, Retaining
	34552		Piston, Pin & Ring Set (Std.) (3-1/8")
	34553		Piston, Pin & Ring Set (J.010" OS)
	34554		Piston, Pin & Ring Set (.000 OS)
	34329A		· · · · · · · · · · · · · · · · · · ·
	34330A		Piston & Pin Ass'y. (Std) (Incl. 43) (3-1 /8")
	34331A		Piston & Pin Ass'y. (.010" OS)(Incl. 43)
			Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332		Ring Set (Std.) (3-1/8" Bore)
	34333		Ring Set (.010" OS)
	34334		Ring Set (.020" OS)
	27888		Ring, Piston pin retaining
	32591C		Rod Assy., Connecting (Incl. 49)
	650662C		Bolt, Connecting rod (2 pieces)
	34034		Lifter, Valve
	34242		Dipper, Oil
	34143		Camshaft (MCR)
	33273A		Extension, Blower housing
	34126		Bracket, Grommet mounting
	650760		Screw, 8-32 x 3/8"
	28545		Grommet, Plastic
	650128		Screw, 10-24 x 1/2"
	35262		* Gasket, Cylinder cover
	33367B		Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368		Bushing, Crankshaft
	27642		Plug, Oil drain
	31950		Seal, Oil
	31845		Shaft, Mechanical governor
	30590A		Washer, Flat
	30591		Gear Assy., Governor (Incl. 81)
	30588A		Spool, Governor
	29193		Ring, Retaining
	650833		Screw, 1/4-20 x 1-3/16"
	650832		Screw, 1/4-20 x 1-11/16"
	32589		Key, Flywheel
92	650815		Washer, Belleville
93	8116		Nut, Hex (1/2-20)
101	610118		Cover, Spark plug (Use as required)
103	650516		Screw, 1/4-20 x 1-1/8
108	29783		Pin, Crankshaft gear
	33245		Gear, Crankshaft

		Description
	34240	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
127A	26073	Washer, Flat (Use as required)
127A	650570	Washer, Flat (Use as required)
127	650691	Washer (Use as req., but not w/6021A screw)
128	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1	302 II C	650691 washer)
		,
131A	650713	Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028	Screw, 5/16-18 x 7/8" (Use as require d)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
135	33636	Resistor Spark Plug (RJ17LM)
139	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	·
		Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
223	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
224	27915A	* Gasket, Intake pipe
260	35447A	Blower Housing (For electric starter)
261	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	33280A	Muffler
	31588	Plate, Muffler locking
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
202	000100	OCIGVY, U-OZ A O/O


	Qty Description
286B 33662	Hub & Screen Assy., Starter
287 29752	Nut & Lockwasher, 1/4-28
290 29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290 30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
290 30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
292 26460	Clamp, Fuel line (Use as required)
298 650665	Screw, 1/4-15 x 7/8"
300 34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
333 3113371	builtwith different size fuel inlet openings. Tanks with the
	1-3/16" I.D. opening use fuel cap 34210. Tanks with the
	1-1/2" I.D. opening use fuel cap 35355.
301 410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301 33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
	I.D.)
301 34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
301 34210	
	(1-3/16" I.D)
301 35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
305 33893A	Tube, Oil fill
306 33590	"O" Ring
310 34011A	Dipstick (Incl. 306)
325 29443	Clip, Fuel line (Use as required)
325 34246	Clip, Ground wire (Use as required)
336 650765	Screw, 10-32 x 1/2"
337 34666	Cover, Carburetor
	·
338 28942	Screw, 10-32 x 3/8"
340 34154	Plate, Fuel tank mounting
341 34155	Bracket, Fuel tank mounting
342 650561	Screw, 1/4-20 x 5/8"
359 34141	Guard, Starter
360 32576	Seal, Snow guard
364 33377	Bracket, Carburetor cover mounting
365 650767	Screw, 8-32 x 27/64"
370E 34589	Decal, Choke
370 34346	Decal, Instruction
370A 34686	Decal, Name
370C 34144	Decal, Primer
370D 34414	Decal, Warning
370J 34870	Decal, Instruction Can be used on HM80 with diecast starter.
	•
379 631021	Inlet Needle, Seat & Clip Assy.
380 632111	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
	170 for breakdown or Fiche18A-1, Grid F-1)
200 500470	Deviced Otester (Defeate Division E. Continu O. none 20 for
390 590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
	breakdown or Fiche 18A-1, Grid G-5)
400 33279G	Gasket Set (Incl. items marked*)
	,
408 35570	Screen Seal (Can be used on HM80 with stamped steel
	recoil starter)
400 2550	,
409 35569	Spacer (Can be used on HM80 with stamped steel recoil
409 35569	,
	Spacer (Can be used on HM80 with stamped steel recoil starter)
409 35569 410 730573	Spacer (Can be used on HM80 with stamped steel recoil starter) Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
	Spacer (Can be used on HM80 with stamped steel recoil starter)
410 730573	Spacer (Can be used on HM80 with stamped steel recoil starter) Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
	Spacer (Can be used on HM80 with stamped steel recoil starter) Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be

Ref #	Part Number	Qty	Description
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

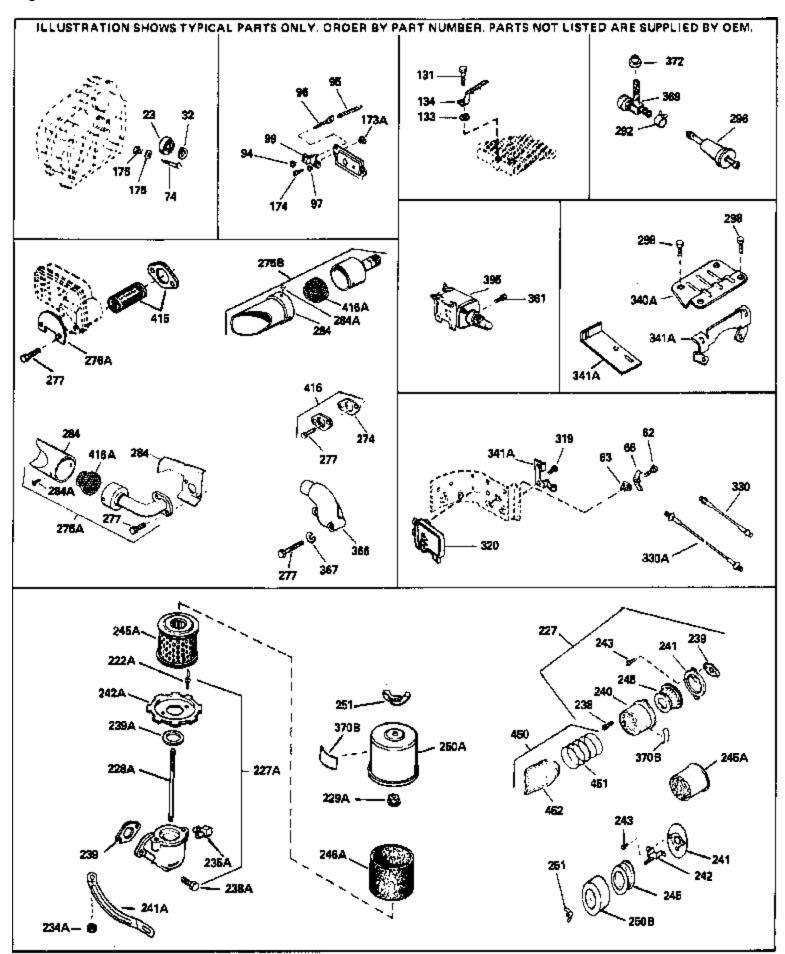

D-f //	Deat Ni week en	De la Decembration
		Oty Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
207	700404	, ,
221	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
220/1	000001	elbow)
		,
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
07EC	25024	Muffler (Optional quiet muffler)
	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
205	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
393	33329D	,
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
4 ∩ 8	35570	Screen Seal (Can be used on HM80 with stamped steel
100	00070	recoil starter)
		,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	130313	used on HM80 with stamped steel recoil starter)
		used on Hivioo with starriped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	650007	,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
.20		HM80 with die cast starter)
		•
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

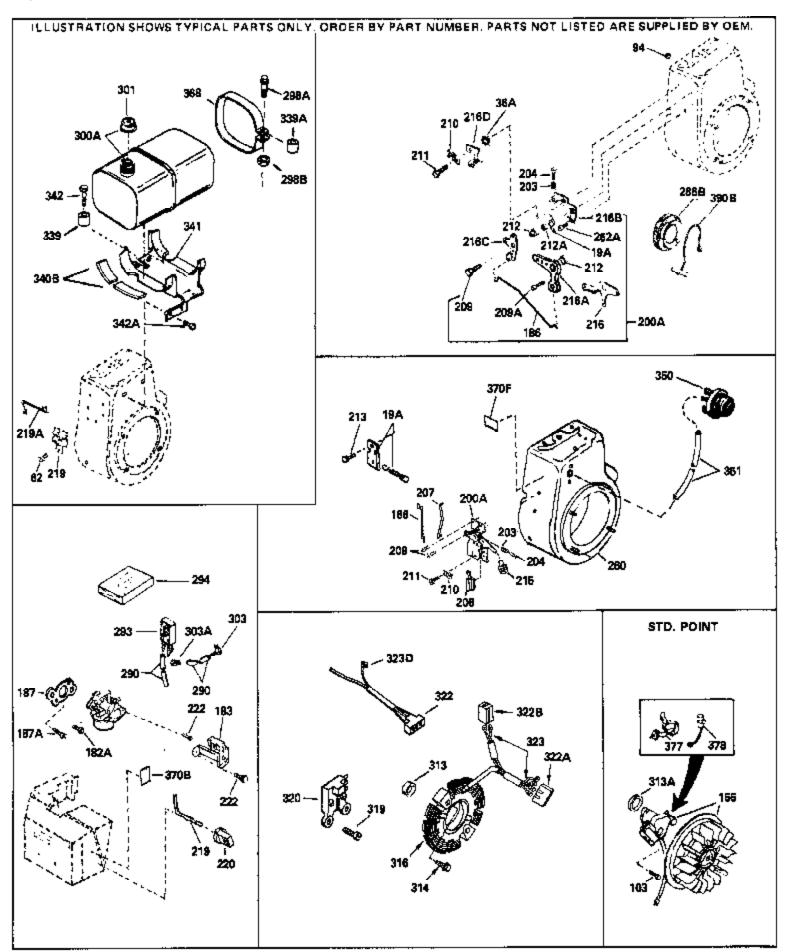

-			
62 103	Part Number 650760 650516 610982	Qty	Description Screw, 8-32 x 3/8" Screw, 1/4-20 x 1-1/8 Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 610767A 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).