


	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
	33719B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	
		Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553	Piston, Pin & Ring Set (.010" OS)
40	34554	Piston, Pin & Ring Set (.020" OS)
41	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	
		Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
47	650662C	Bolt, Connecting rod (2 pieces)
48	34034	Lifter, Valve
49	34242	Dipper, Oil
50	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	
		Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
89	32589	Key, Flywheel
92	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
101		
	650489	Screw 1/4-20 x 5/8"
103	650489 20783	Screw, 1/4-20 x 5/8" Pin, Crapkshaft gear
103 108	650489 29783 33245	Screw, 1/4-20 x 5/8" Pin, Crankshaft gear Gear, Crankshaft

	Part Number Qty	
	34240	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
125	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as required)
	6021A	
IJUA	0021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with 650691 washer)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, $1/4-20 \times 5/8"$ (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	
		Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	27882	Cap, Upper valve spring
	35862	Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
169	27896A	* Gasket, Breather cover
170	28423	Body, Breather
171	28424	Element, Breather
172	28425	Cover, Valve spring
173	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	34145	Blower Housing (For electric starter)
261	650788	Screw, 5/16-18 x 3/4" (Use as require d)
262	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	33280A	Muffler
	31588	Plate, Muffler locking
	650729	Screw, 5/16-18 x 3-3/16"
211		Screw, 5/16-18x2-3/4" (Used with 276A)
277A		
277A 281	33013	Cover, Starter bubble
277A 281 282		


Dof #	Part Number		Description
	29752		Description
	29752 29774		Nut & Lockwasher, 1/4-28
			Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		k	builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
004	4404.440		
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I	I.D.)
301	34210	F	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
001			(1-3/16" I.D)
	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
305	33893A		Tube, Oil fill
306	33590	"	"O" Ring
310	34011A	[Dipstick (Incl. 306)
	29443		Clip, Fuel line (Use as required)
	34246		Clip, Ground wire (Use as required)
	650765		Screw, 10-32 x 1/2"
	34666		Cover, Carburetor
	28942		Screw, 10-32 x 3/8"
	34154		Plate, Fuel tank mounting
	34155		Bracket, Fuel tank mounting
	650561		Screw, 1/4-20 x 5/8"
	34141		Guard, Starter
	32576		Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34144		Decal, Primer
	34679		Decal, Choke
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
370	34346		Decal, Instruction
370D	34414	[Decal, Warning
379	631021	I	Inlet Needle, Seat & Clip Assy.
380	632111	(Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			170 for breakdown or Fiche18A-1, Grid F-1)
000	F00470		Powind Startor (Dofor to Division E. Sostian O. mars 20 for
390	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for
		ľ	breakdown or Fiche 18A-1, Grid G-5)
400	33279G	(Gasket Set (Incl. items marked*)
	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
		5	starter)
410	730573	г	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	10010		used on HM80 with stamped steel recoil starter)
		l	
411	35568	[Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
	050007		
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		5	stamped steel recoil starter)
420	730225	ç	SAE 30, 4-Cycle Engine Oil (Quart)
.20			

Ref #	Part Number 0	Aty Description
	730226 730572	SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

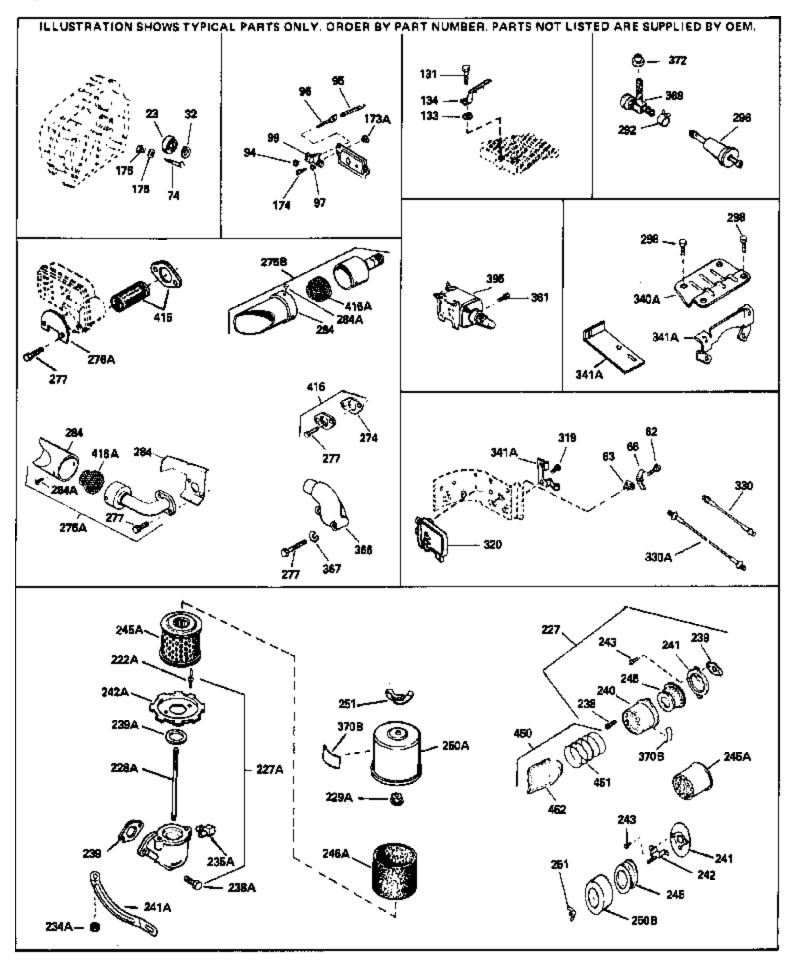

		/ Description
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	31855	Retainer, Bearing
	31000	
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
ZZðA	1 COUCO	
		elbow)
0454	24700	Floment Air closer
	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
		can be used on any model.
275C	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100		
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	130313	
		used on HM80 with stamped steel recoil starter)
111	35568	Debric Screen (Can be used on UM90 with stamped steel
411	30300	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	660007	Porous E/16 10 x 1 E/01/ (Con be used as LIN 100 with
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
- /		· ,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
0		HM80 with die cast starter)
		I INIOU WILLI UIE VASI SIALIEL
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
-120		
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

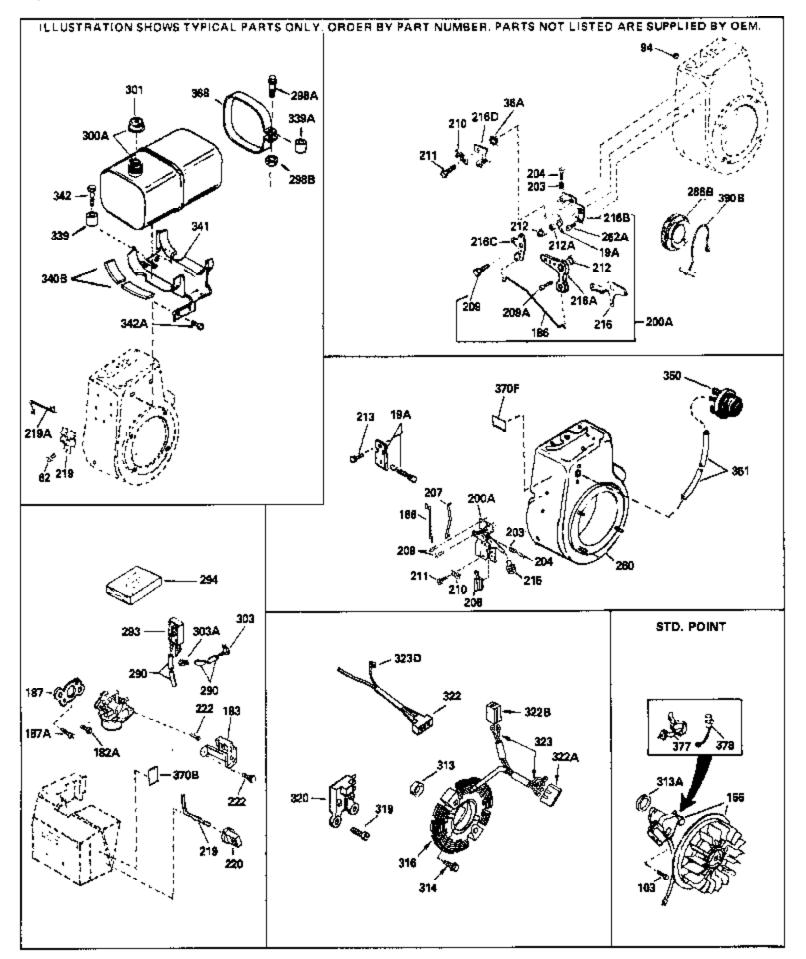

		/ Description
	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
156	610848	Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1 Grid G
183	34587	Bracket, Choke
	34667	Link, Governor
	34677	Control Bracket (Incl.19,19A,203,204, 206,209)
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	33878	Link, Governor-to-throttle
	650821	
		Screw, 10-32 x 1/2"
	32410	Knob, Control
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	34145	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16 I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570629A	Primer Assy.
	32180C	Primer Line
	34387	Decal, Instruction Can be used on HM80 with stamped stee
		recoil starter.
370J	34870	Decal, Instruction Can be used on HM80 with diecast starte
377	30547A	Contact Assy., Breaker
	30548B	Condenser
	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)

	Part Number		Description
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	a	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	a	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	S	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).