

Ref #	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652	Pin, Dowel
	650820	Screw, 1/4-20 x 1/2"
	32678	Nipple, Oil
	30969	Cap, Oil drain
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
		•
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	33365B	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (3.010" OS)
	34554	
		Piston, Pin & Ring Set (.020" OS) Piston & Pin Apply (Std)(Incl. 42)(3.1 /9")
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
50	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
61	34126	Bracket, Grommet mounting
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	
		Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor Ring, Retaining
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
103	650489	Screw, 1/4-20 x 5/8"

Ref #	Part Number (Qtv	Description
	29783	٠.,	Pin, Crankshaft gear
	33245		Gear, Crankshaft
	34240		Ground Wire
	34041A		* Gasket, Head
	34030A		Head, Cylinder
	27878A		Exhaust Valve (Std.) (Incl. 151)
	27880A		Exhaust Valve (1/32" OS) (Incl. 151)
	34035		Intake Valve (Std.) (Incl. 151)
126	34036		Intake Valve (1/32" OS) (Incl. 151)
127	650691		Washer (Use as req., but not w/6021A screw)
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
	650690		Washer, Belleville
	650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1	002171		650691 washer)
			•
	650694A		Screw, 5/16-18 x 2" (Use as required)
	650802		Screw, 1/4-20 x 5/8" (Use as required)
131	650737		Screw, 1/4-20 x 1/2" (Use as required)
131	650738		Screw, 1/4-20 x 5/8" (Use as required)
131A	650713		Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028		Screw, 5/16-18 x 7/8" (Use as require d)
	33636		Resistor Spark Plug (RJ17LM)
	33369		Bracket, Governor gear
	650836		Screw, 10-24 x 1/2"
	27882		Cap, Upper valve spring
	27882		Cap, Upper valve spring
	27881		
			Spring, Valve
	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
174	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
178	29752		Nut & Lockwasher, 1/4-28
179B	30593		Clip, Primer line (Use as required)
182	30088A		Screw, 1/4-28 x 1"
184	33263		* Gasket, Carburetor
185	33877		Pipe, Intake
	31342		Spring, Compression
	650549		Screw, 5-40 x 7/16"
	610973		Terminal Assy. (Use as required)
	27793		Clip, Conduit
	28942		Screw, 10-32 x 3/8"
	650378		Screw, To 32 x 3/6 Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A		
			* Gasket, Intake pipe
	34145		Blower Housing (For electric starter)
	650788		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
	35824		Muffler (Optional quiet muffler)
	33280A		Muffler
276	31588		Plate, Muffler locking
277	650729		Screw, 5/16-18 x 3-3/16"
277A	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
			,


Ref #	Part Number	Qty	Description
281	33013		Cover, Starter bubble
282	650760		Screw, 8-32 x 3/8"
286B	33662		Hub & Screen Assy., Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		
			Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
224	4404.445		
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
201	24240		Fuel Can (Bad Blastic) (Sourt Begintent Lligh Brofile)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A		Tube, Oil fill
	33590		"O" Ring
			•
	34011A		Dipstick (Incl. 306)
	29443		Clip, Fuel line (Use as required)
	34246		Clip, Ground wire (Use as required)
336	650765		Screw, 10-32 x 1/2"
337	34666		Cover, Carburetor
338	28942		Screw, 10-32 x 3/8"
340	34154		Plate, Fuel tank mounting
	34155		Bracket, Fuel tank mounting
	650561		Screw, 1/4-20 x 5/8"
	34141		Guard, Starter
	32576		·
			Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34589		Decal, Choke
	34416		Decal, Instruction
370A	550223		Decal, Name
370C	34417		Decal, Primer
370D	34414		Decal, Warning
370J	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	631021		Inlet Needle, Seat & Clip Assy.
	632111		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
000	332111		170 for breakdown or Fiche18A-1, Grid F-1)
			170 for breakdown of Fichie 107(1), Chair 1)
390	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for
			breakdown or Fiche 18A-1, Grid G-5)
400	000700		,
	33279G		Gasket Set (Incl. items marked*)
408	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
400	35560		Spacer (Can be used on HM80 with stamped steel receil
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
.10			used on HM80 with stamped steel recoil starter)
			acca cit i into mai diampod dicoi rocoli diamoi

		Description
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).



	5	- B 14
		ty Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
131	650737	Screw, 1/4-20 x 1/2" (Use as required)
131	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
ZZI	100121	(Use as required)
		(
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
220/1	000001	elbow)
		GIDOVV)
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
0750	25024	NA files (Outional arrist as files)
	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
369	35857	Valve, Fuel shut-off
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
205	2222D	Starter Mater Kit (110, 120, Volt) This 110, 120 yell starter
393	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
100	00070	recoil starter)
		•
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	730373	
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	05005	,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
∆ 15	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
420	100012	HM80 with die cast starter)
		I IIVIOU WILLI LIE CASI SIALIEI)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
		,

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

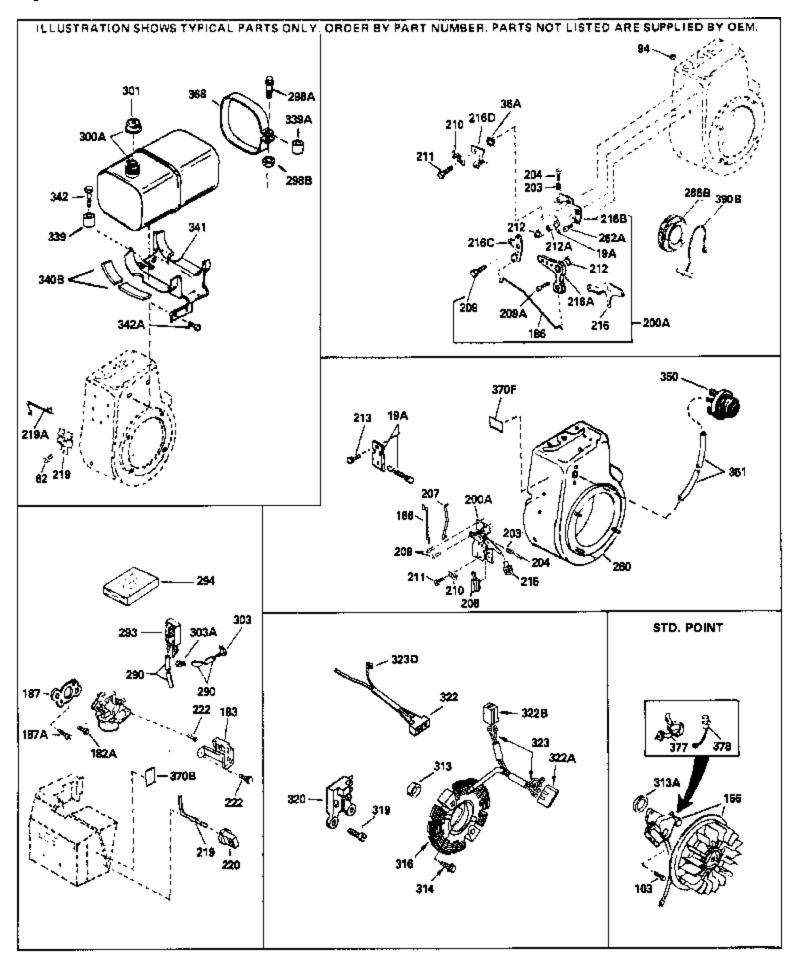

Ref #	Part Number Qt	Description
103	650760 650489 610848	Screw, 8-32 x 3/8" Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 34145 35824 650696 33662 29774 30705 30962 410144B 33032	Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic) (Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570629A 32180C 34387	Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570	Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)

D-f !!	Dort N. mahan	O4 :	Description
	Part Number 650907	<u> Qīy</u>	Description Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).