


Ref #	Part Number 0	Qtv	Description
	34348B	~.,	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652		Pin, Dowel
3	650820		Screw, 1/4-20 x 1/2"
4	32678		Nipple, Oil
5	30969		Cap, Oil drain
15B	650494		Screw, 6-40 x 5/16"
15A	30700		Yoke, Governor
15	30699C		Rod Assy., Governor (Incl. 15A & 15B)
16	33454		Governor Lever Assy.
17	29916		Clamp, Governor lever
18	650548		Screw, 8-32 x 5/16"
19	34663		Spring, Speed control
20	32630		Seal, Oil
25	35256A		Baffle, Blower housing
26	650561		Screw, 1/4-20 x 5/8"
30	33365B		Crankshaft (Incl. 108 & 109)
35	29826		Screw, 10-32 x 3/4"
	29918		Lockwasher, # 8 E.T.
	29216		Nut & Lockwasher, 10-32 "Keps"
37A	30322		Locknut, Hex "Keps", 8-32
	29642		Ring, Retaining
	34552		Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553		Piston, Pin & Ring Set (.010" OS)
	34554		Piston, Pin & Ring Set (.020" OS)
	34329A		Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A		Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A		Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332		Ring Set (Std.) (3-1/8" Bore)
	34333		Ring Set (.010" OS)
	34334		Ring Set (.020" OS)
	27888		Ring, Piston pin retaining
	32591C		Rod Assy., Connecting (Incl. 49)
	650662C		Bolt, Connecting rod (2 pieces)
	34034		Lifter, Valve
	34242		Dipper, Oil
	34143		Camshaft (MCR)
	33273A		Extension, Blower housing
	34126		Bracket, Grommet mounting
	650760		Screw, 8-32 x 3/8"
	28545		Grommet, Plastic
	650128		Screw, 10-24 x 1/2"
	35262		* Gasket, Cylinder cover
	33367B		Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368		Bushing, Crankshaft
	27642		Plug, Oil drain
	31950		Seal, Oil
	31845		Shaft, Mechanical governor
	30590A		Washer, Flat
	30591		Gear Assy., Governor (Incl. 81)
	30588A		Spool, Governor
	29193		Ring, Retaining
	650833		Screw, 1/4-20 x 1-3/16"
	650832		Screw, 1/4-20 x 1-11/16"
	32589		Key, Flywheel
	650815		Washer, Belleville
	8116		Nut, Hex (1/2-20)
	610118		Cover, Spark plug (Use as required)
103	650489		Screw, 1/4-20 x 5/8"

		Qty	
	29783		Pin, Crankshaft gear
109	33245		Gear, Crankshaft
110	34240		Ground Wire
119	34041A		* Gasket, Head
120	34030A		Head, Cylinder
125	27878A		Exhaust Valve (Std.) (Incl. 151)
125	27880A		Exhaust Valve (1/32" OS) (Incl. 151)
	34035		Intake Valve (Std.) (Incl. 151)
	34036		Intake Valve (1/32" OS) (Incl. 151)
	650691		Washer (Use as req., but not w/6021A screw)
	26073		Washer, Flat (Use as required)
	650570		Washer, Flat (Use as required)
	650690		Washer, Belleville
	650727		Screw, 5/16-18 x 1-3/4" (Use as required)
	6021A		Screw, $5/16-18 \times 1-1/2$ " (Use as required, but do notuse with
1304			650691 washer)
	650694A		Screw, 5/16-18 x 2" (Use as required)
	650802		Screw, 1/4-20 x 5/8" (Use as required )
131	650737		Screw, 1/4-20 x 1/2" (Use as required )
131	650738		Screw, 1/4-20 x 5/8" (Use as required )
131A	650713		Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028		Screw, 5/16-18 x 7/8" (Use as require d)
135	33636		Resistor Spark Plug (RJ17LM)
139	33369		Bracket, Governor gear
140	650836		Screw, 10-24 x 1/2"
149A	35862		Seal Assy., Intake valve
149	27882		Cap, Upper valve spring
150	27881		Spring, Valve
	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	29752		Nut & Lockwasher, 1/4-28
	30593		Clip, Primer line (Use as required)
	30088A		Screw, 1/4-28 x 1"
	33263		* Gasket, Carburetor
	33877		Pipe, Intake
	31342		Spring, Compression
	650549		Screw, 5-40 x 7/16"
	610973		Terminal Assy. (Use as required)
	27793		Clip, Conduit
	28942		Screw, 10-32 x 3/8"
	650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A		* Gasket, Intake pipe
	35447A		
			Blower Housing (For electric starter)
	650788 20747B		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
	35824		Muffler (Optional quiet muffler)
	33280A		Muffler
	31588		Plate, Muffler locking
	650729		Screw, 5/16-18 x 3-3/16"
277A	650696		Screw, 5/16-18x2-3/4" (Used with 276A )


		Qty Description
281	33013	Cover, Starter bubble
282	650760	Screw, 8-32 x 3/8"
286B	33662	Hub & Screen Assy., Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	
		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
201	410144P	Eucl Con (M/bito Dipotio)(Std)(1,1/2" LD)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
ર∩1	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
501		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A	Tube, Oil fill
	33590	"O" Ring
	34011A	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	650765	Screw, 10-32 x 1/2"
	34666	Cover, Carburetor
	28942	Screw, 10-32 x 3/8"
340	34154	Plate, Fuel tank mounting
341	34155	Bracket, Fuel tank mounting
342	650561	Screw, 1/4-20 x 5/8"
	34141	Guard, Starter
	32576	Seal, Snow guard
	33377	Bracket, Carburetor cover mounting
	650767	Screw, 8-32 x 27/64"
	34589	Decal, Choke
	34416	Decal, Instruction
	34686	Decal, Name
	34417	Decal, Primer
370D	34414	Decal, Warning
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
379	631021	Inlet Needle, Seat & Clip Assy.
	632111	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
500		170 for breakdown or Fiche18A-1, Grid F-1)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
		breakdown or Fiche 18A-1, Grid G-5)
400	222700	Coolect Cot (lool items marks 1*)
	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
100	35569	Spacer (Can be used on HM80 with stamped steel recoil
409		• •
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
	-	used on HM80 with stamped steel recoil starter)

Ref #	Part Number Qty	Description
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

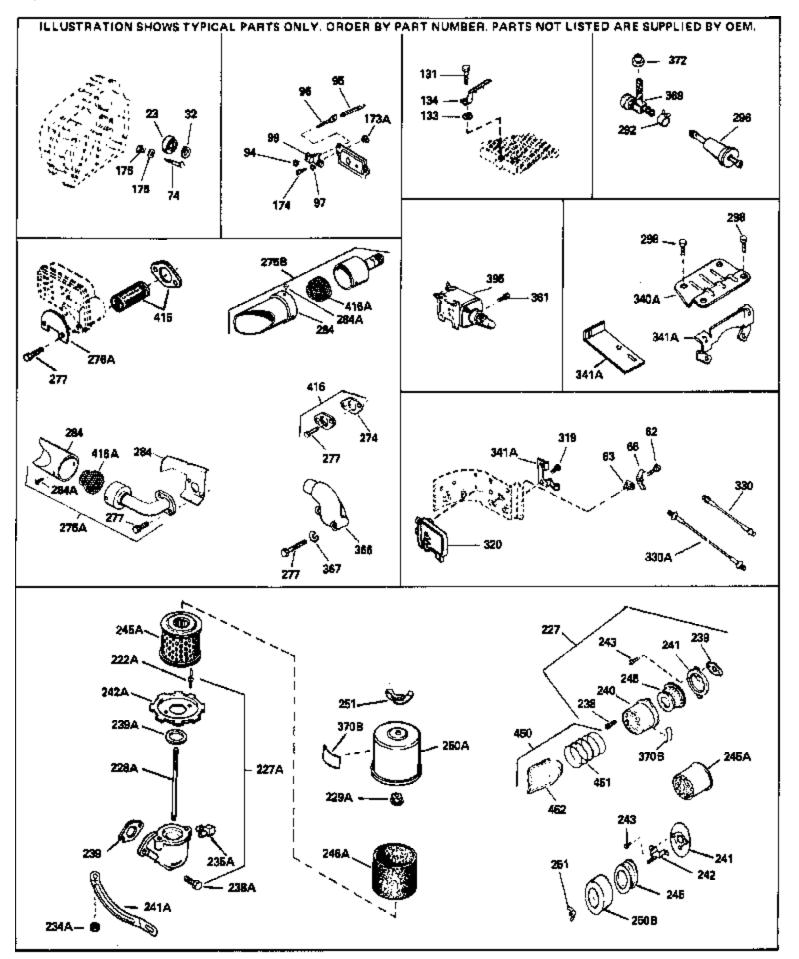

split, #10 (Buy loc ally) ' (Use as required ) ' (Use as required ) ' (Use as required ) hcl.238,239,240,241,243,245 & 370) hcl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" '4" (Used with 276A )
<ul> <li><sup>1</sup> (Use as required )</li> <li><sup>1</sup> (Use as required)</li> <li><sup>1</sup> (Use as requi</li></ul>
<ul> <li><sup>1</sup> (Use as required )</li> <li><sup>1</sup> (Use as required)</li> <li><sup>1</sup> (Use as requi</li></ul>
<ul> <li><sup>1</sup> (Use as required )</li> <li><sup>1</sup> (Use as required)</li> <li><sup>1</sup> (Use as requ</li></ul>
<ul> <li><sup>1</sup> (Use as required )</li> <li><sup>1</sup> (Use as 239,240,241,243,245 &amp; 370)</li> <li><sup>1</sup> (Use as 239,240,241,243 &amp; 245) (Use (Use as required))</li> <li><sup>1</sup> (Use as required)</li> <li><sup>1</sup> (Use as required)</li></ul>
<ul> <li>' (Use as required )</li> <li>' (Use as required )</li> <li>' (Use as required )</li> <li>ncl.238,239,240,241,243,245 &amp; 370)</li> <li>ncl. 238, 239, 240, 241, 243 &amp; 245) (Use</li> <li>(Use as required)</li> <li>Use as required)</li> <li>Use as required)</li> <li>(Use as required)<!--</td--></li></ul>
" (Use as required ) ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
ncl.238,239,240,241,243,245 & 370) ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) 44A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A )
ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A )
ncl. 238, 239, 240, 241, 243 & 245) (Use (Use as required) Jse as required) (Used with drilled thru r se as required) (4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" (4" (Used with 276A )
(Use as required) Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
(Use as required) Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
Jse as required) (Used with drilled thru r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
r se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A )
se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A)
se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A)
se as required) 4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A)
4A & 416A) (This spark arresting muffler model.) et muffler) 3/16" 4" (Used with 276A)
model.) et muffler) 3/16" (4" (Used with 276A )
et muffler) 3/16" '4" (Used with 276A )
8/16" (Used with 276A )
'4" (Used with 276A )
se as required)
an be used on HM80 with diecast starter.
an be used on HM80 with stamped steel
0-120 Volt) This 110-120 volt starter
been added to this engine. It can be
r hasdrilled and tapped starter mounting
ear flywheel. Refer to service number
o of motor, or on decal for identification.
e used on HM80 with stamped steel
d on HM80 with stamped steel recoil
d on HM80 with stamped steel recoil
ncl. 360, 370B, 387, 411 &413) (Can be
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter)
ncl. 360, 370B, 387, 411 &413) (Can be
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter)
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter)
hcl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) d.274,277)(Use as req.)
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) 4.274,277)(Use as req.) 370J, 426 & 4 27) (Can be used on
hcl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) d.274,277)(Use as req.)
ncl. 360, 370B, 387, 411 &413) (Can be stamped steel recoil starter) be used on HM80 with stamped steel 5/8" (Can be used on HM80 with I starter) 4.274,277)(Use as req.) 370J, 426 & 4 27) (Can be used on

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

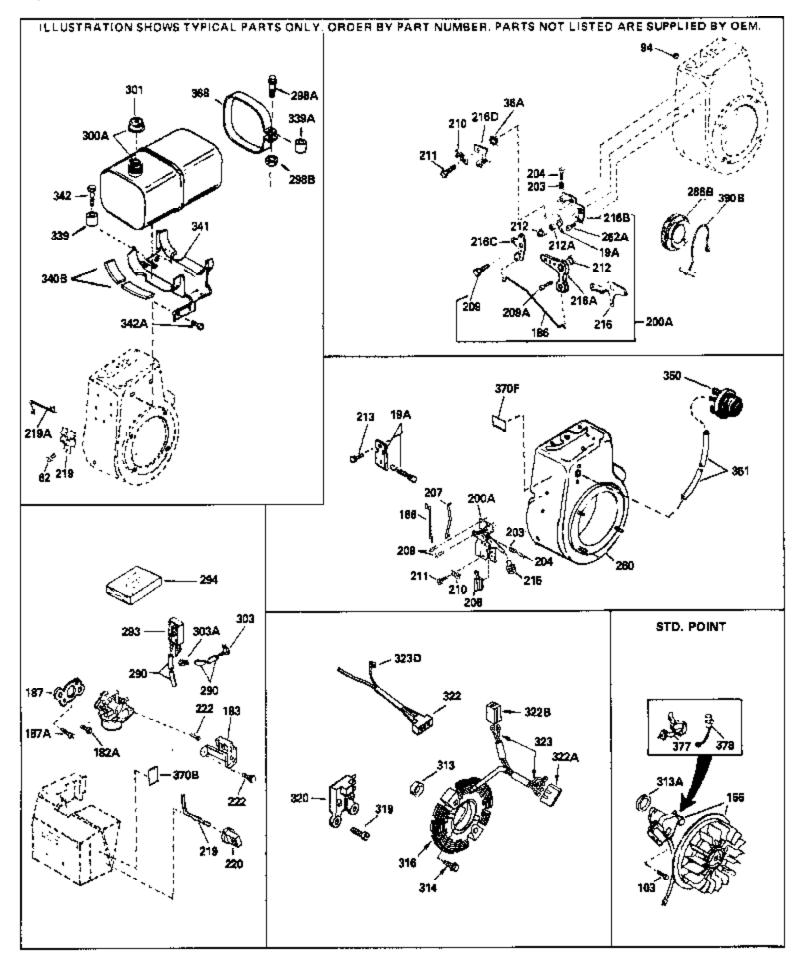

62 103	Part Number 650760 650489 610848	Qty	Description Screw, 8-32 x 3/8" Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290 301	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A ) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).