

| Ref # | Part Number Qty | |
|-------|-----------------|--|
| 1 | 34348B | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| 2 | 27652 | Pin, Dowel |
| 15 | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| 15B | 650494 | Screw, 6-40 x 5/16" |
| 15A | 30700 | Yoke, Governor |
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | 650548 | Screw, 8-32 x 5/16" |
| | 33578 | Spring, Governor |
| | 32630 | Seal, Oil |
| | 35256A | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 33624A | Crankshaft (Incl. 108 & 109) |
| | 29826 | Screw, 10-32 x 3/4" |
| | 29918 | Lockwasher, #8 E.T. |
| | 30322 | Locknut, Hex "Keps", 8-32 |
| | 29216 | • |
| | 29642 | Nut & Lockwasher, 10-32 "Keps" |
| | | Ring, Retaining |
| | 34552 | Piston, Pin & Ring Set (Std.) (3-1/8") |
| | 34553 | Piston, Pin & Ring Set (.010" OS) |
| | 34554 | Piston, Pin & Ring Set (.020" OS) |
| | 34329A | Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
| | 34330A | Piston & Pin Ass'y. (.010" OS)(Incl. 43) |
| | 34331A | Piston & Pin Ass'y. (.020" OS)(Incl. 43) |
| | 34332 | Ring Set (Std.) (3-1/8" Bore) |
| | 34333 | Ring Set (.010" OS) |
| | 34334 | Ring Set (.020" OS) |
| | 27888 | Ring, Piston pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 49) |
| | 650662C | Bolt, Connecting rod (2 pieces) |
| | 34034 | Lifter, Valve |
| | 34242 | Dipper, Oil |
| | 34143 | Camshaft (MCR) |
| 60 | 33273A | Extension, Blower housing |
| 62 | 650760 | Screw, 8-32 x 3/8" |
| 63 | 28545 | Grommet, Plastic |
| 65 | 650128 | Screw, 10-24 x 1/2" |
| 69 | 35262 | * Gasket, Cylinder cover |
| 70 | 33626B | Cyl. Cover (Incl.71,74,75,80,175,176, 311,312) |
| 72 | 27642 | Plug, Oil drain |
| 75 | 33625 | Seal, Oil |
| 80 | 31845 | Shaft, Mechanical governor |
| 81 | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| 83 | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 650833 | Screw, 1/4-20 x 1-3/16" |
| | 650832 | Screw, 1/4-20 x 1-11/16" |
| | 32589 | Key, Flywheel |
| | 650815 | Washer, Belleville |
| | 8116 | Nut, Hex (1/2-20) |
| | 610118 | Cover, Spark plug (Use as required) |
| | 650516 | Screw, 1/4-20 x 1-1/8 |
| | 29783 | Pin, Crankshaft gear |
| | 33245 | Gear, Crankshaft |
| | 30831 | Ground Wire |
| | 34041A | * Gasket, Head |
| | 34030A | Head, Cylinder |
| 120 | | i idau, Oyiii iudi |

| | | Oty Description |
|------|---------|--|
| | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| 125 | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| 126 | 34035 | Intake Valve (Std.) (Incl. 151) |
| 126 | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| 127A | 26073 | Washer, Flat (Use as required) |
| | 650570 | Washer, Flat (Use as required) |
| | 650691 | Washer (Use as req., but not w/6021A screw) |
| | 650690 | Washer, Belleville |
| | 650727 | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | | |
| 130A | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| | | 650691 washer) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 650802 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 1/2 (Ose as required) Screw, 1/4-20 x 5/8" (Use as required) |
| | | • • • |
| | 33636 | Resistor Spark Plug (RJ17LM) |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 27882 | Cap, Upper valve spring |
| | 27882 | Cap, Upper valve spring |
| | 27881 | Spring, Valve |
| 151 | 32581 | Cap, Lower valve spring |
| 169 | 27896A | * Gasket, Breather cover |
| 170 | 28423 | Body, Breather |
| 171 | 28424 | Element, Breather |
| 172 | 28425 | Cover, Valve spring |
| | 35350 | Tube, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 650597 | Screw, 10-24 x 5/8" |
| | 30593 | Clip, Primer line (Use as required) |
| | 33263 | * Gasket, Carburetor |
| | 32924 | Spring, Compression |
| | | . • |
| | 650688 | Screw, 10-32 x 1" |
| | 610973 | Terminal Assy. (Use as required) |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| | 28820 | Screw |
| | 27915A | * Gasket, Intake pipe |
| | 33375D | Blower Housing (For electric starter) |
| | 650788 | Screw, 5/16-18 x 3/4" (Use as require d) |
| 262 | 29747B | Screw, 5/16-24 x 21/32" |
| 265 | 33272B | Cover, Cylinder head |
| | 35824 | Muffler (Optional quiet muffler) |
| 277A | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 33013 | Cover, Starter bubble |
| | 650760 | Screw, 8-32 x 3/8" |
| | 33662 | Hub & Screen Assy., Starter |
| | 29752 | Nut & Lockwasher, 1/4-28 |
| | 29774 | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | | |
| | 30705 | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| | 30962 | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| | 26460 | Clamp, Fuel line (Use as required) |
| | 650273 | Screw, 5/16-18 x 1/2" |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| | | |


| Ref # | Part Number Q | y Description |
|-------|---------------|--|
| | 34186A | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355. |
| 301 | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 301 | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| 306 | 29673 | * Gasket, Oil fill |
| 310 | 31297 | Dipstick (Incl. 306) |
| 325 | 29443 | Clip, Fuel line (Use as required) |
| | 34246 | Clip, Ground wire (Use as required) |
| | 30063 | Screw, Torx T-30, 1/4-20 x 1/2" |
| | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 550223 | Decal, Name |
| | 34346 | Decal, Instruction |
| | 631725 | Inlet Needle, Seat & Clip Assy. |
| 380 | 632048 | Carburetor (Incl. 184) (Refer to Division 5, Section A, page 164 for breakdown or Fiche18A-1, Grid E-11) |
| 390 | 590479 | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5) |
| 400 | 33279G | Gasket Set (Incl. items marked*) |
| 408 | 35570 | Screen Seal (Can be used on HM80 with stamped steel recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter) |
| 420 | 730225 | SAE 30, 4-Cycle Engine Oil (Quart) |
| | 730226 | SAE 5W30, 4-Cycle Engine Oil (Quart) |
| 425 | 730572 | Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| | | |

| Ref # Part Number 432 611079 | Qty Description D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
|---------------------------------|---|
| 433 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |



| | | y Description |
|------|--------------------|--|
| | 650760 | Screw, 8-32 x 3/8" |
| | 28545 | Grommet, Plastic |
| 68 | 33356 | Terminal, Ground |
| 74 | 31855 | Retainer, Bearing |
| 97 | | Lockwasher, Heavy split, #10 (Buy loc ally) |
| 131 | 650802 | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650128 | Screw, 10-24 x 1/2" |
| | 650597 | Screw, 10-24 x 5/8" |
| | 730127 | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) |
| 221 | 130121 | (Use as required) |
| | | (Use as required) |
| 227 | 730164 | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use |
| | | as required) |
| 0004 | 050004 | . , |
| | 650824 | Stud, 1/4-20 x 7.33 (Use as required) |
| 228A | 650851 | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | elbow) |
| 230 | 27272A | * Gasket, Air cleaner |
| | 27272A | · |
| | | * Gasket, Air cleaner |
| | 33266 | Bracket, Air cleaner |
| | 33267 | Bracket, Air cleaner |
| | 28820 | Screw, 10-32 x 1/2" |
| | 33268 | Element, Air cleaner |
| | 34700 | Element, Air cleaner |
| 250B | 33269A | Cover, Air cleaner |
| 251 | 650513 | Nut, Wing, 1/2-20 |
| 274 | 35865 | Gasket, Exhaust (Use as required) |
| 275C | 35824 | Muffler (Optional quiet muffler) |
| 275A | 33714 | Muffler (Incl. 284, 284A & 416A) |
| | 391026 | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | 33.323 | can be used on any model.) |
| | | • , |
| | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 34390 | Deflector, Exhaust |
| 292 | 26460 | Clamp, Fuel line (Use as required) |
| 298 | 650273 | Screw, 5/16-18 x 1/2" |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| | 34259 | Plate, Fuel tank mounting |
| | 34258 | Bracket, Fuel tank mounting |
| | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 34387 | Decal, Instruction Can be used on HM80 with stamped steel |
| 3700 | 3 -30 1 | recoil starter. |
| | | recoil starter. |
| 395 | 33329D | Starter Motor Kit (110-120 Volt) This 110-120 volt starter |
| | | motor kit may have been added to this engine. It can be |
| | | added only if cylinder hasdrilled and tapped starter mounting |
| | | bosses and a ring gear flywheel. Refer to service number |
| | | stamped on end cap of motor, or on decal for identification. |
| | | Ref |
| | | |
| 408 | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| 400 | 35569 | Spacer (Can be used on HM80 with stamped steel resail |
| 409 | JJJ03 | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| | | starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| | | used on HM80 with stamped steel recoil starter) |
| | | |

| Ref # | Part Number | Qty | Description |
|-------|------------------|-----|---|
| 411 | 35568 | - | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| | 730130 730572 | | Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

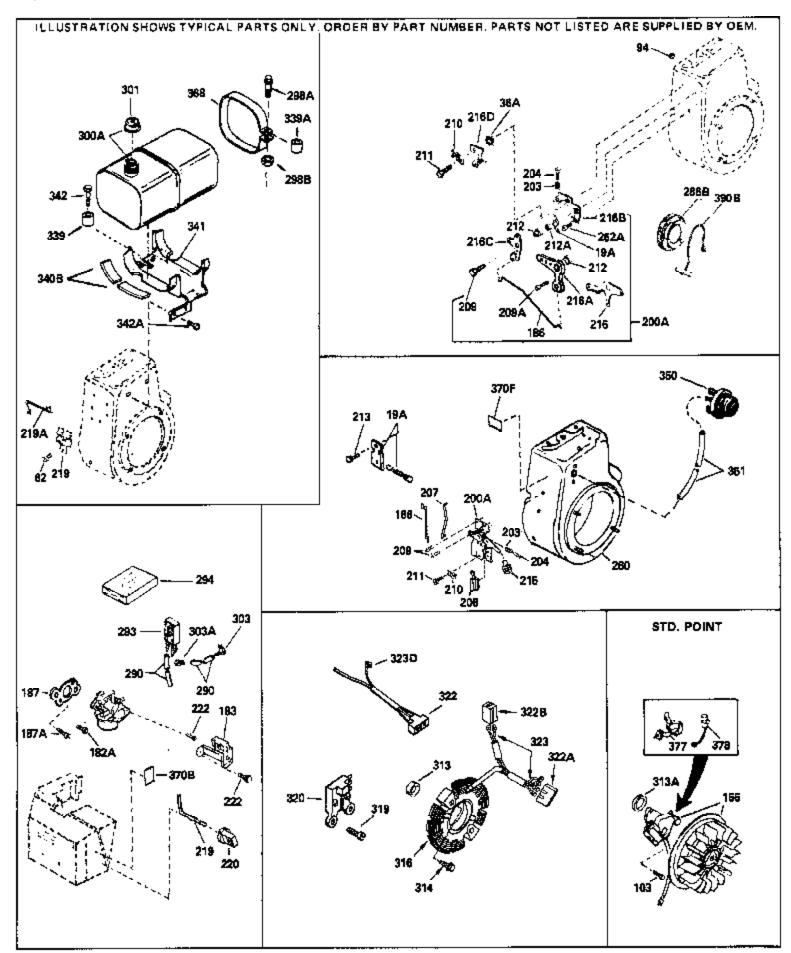

| 19A 36A 62 103 | Part Number 32977 27070 650760 650516 610982 | Qty | Description Spring, Torsion * Washer, Lock, 1/4" Screw, 8-32 x 3/8" Screw, 1/4-20 x 1-1/8 Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 36 for breakdown or Fiche 18A-1, Grid G |
|---|---|-----|---|
| 186 187A 187 | 650517 33372 30196 34349A 730152 | | Screw, 1/4-20 x 27/32" Link, Governor lever-to-bellcrank Screw, 5/16-18 x 3/4" Flange, Carburetor mounting Control Bracket (Incl. 19, 19A, 209A, 212, 212A, 216A, 216B, 216C & 262A) |
| 204 206 207 209A 210 211 211 212 212A 216C 216B 216D 216 260 262A 275C 277A 286B 290 290 290 293 | 32924 650688 610973 34350 30312 27793 28942 28820 29530 28562 30201A 30199A 34352 34351 33375D 650399 35824 650696 33662 29774 30705 30962 35813 33010 410144B 33032 | | Spring, Compression Screw, 10-32 x 1" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Screw Bushing, Bellcrank lever Bushing, RM. adjusting lever Lever, Speed control Bracket, Speed adjusting (Incl.100 & 324) Bracket, Idle adjust Lever, Bellcrank Blower Housing (For electric starter) Screw, 10-32 x 5/8" Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 303 303A 313A 339 342 370J 370B | 35355 33713 34237 33876 35038 30063 34870 34387 | | Fuel Cap (Red plastic) (1-1/2" I.D.) Fitting, Elbow Fitting, Fuel Gasket, Stator Spacer, Tank Screw, Torx T-30, 1/4-20 x 1/2" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter. Contact Assy., Breaker |
| 3// | JUJ+171 | | Outland Assy., Dicard |

| D-(# | Deat Marshau | <u> </u> | Description |
|------|------------------|----------|---|
| | Part Number | Qty | Description |
| | 610767A 35570 | | Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter) |
| 409 | 35569 | | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| 425 | 730572 | | Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |