


Ref #	Part Number Qt	/ Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15A	30700	Yoke, Governor
15B	650494	Screw, 6-40 x 5/16"
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	35229	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888 23504C	Ring, Piston pin retaining
	32591C 650662C	Rod Assy., Connecting (Incl. 49) Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
82	30591	Gear Assy., Governor (Incl. 81)
83	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611093	Flywheel (3 amp, w/ring gear)
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
100	35135	Lamination Assy., Solid State

101 102 103 108 109 110 119 120 125 125 126 127 127A 127A 127A 128 129	Part Number 610118 650872 650814 29783 33245 35253 34041A 34030A 27878A 27880A 34035 34036 650691 26073 650570 650690 650727 650694A 6021A	Qty	Description  Cover, Spark plug (Use as required) Stud, Lamination mounting Screw, Torx T-15, 10-24 x 1" Pin, Crankshaft gear Gear, Crankshaft Ground Wire  * Gasket, Head Head, Cylinder Exhaust Valve (Std.) (Incl. 151) Exhaust Valve (Std.) (Incl. 151) Intake Valve (Std.) (Incl. 151) Intake Valve (Std.) (Incl. 151) Washer (Use as req., but not w/6021A screw) Washer, Flat (Use as required) Washer, Flat (Use as required) Washer, Belleville Screw, 5/16-18 x 1-3/4" (Use as required) Screw, 5/16-18 x 2" (Use as required, but do notuse with 650691 washer)
131 131A 131A 131A 135 139 140 149A 150 151 169 170 171 172 173 174 174 178 179B 182 184 185 203 204 206 223 224 260 261 262 265 275	650802 650737 650738 650713 792028 33636 33369 650836 27882 35862 27881 32581 27896A 28423 28424 28425 35350 650128 650597 29752 30593 30088A 33263 33877 31342 650549 610973 650378 27915A 35447A 650788 29747B 33272B 35056 35824		Screw, 1/4-20 x 5/8" (Use as required ) Screw, 1/4-20 x 1/2" (Use as required ) Screw, 5/16-18 x 5/8" (Use as required ) Screw, 5/16-18 x 7/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Resistor Spark Plug (RJ17LM) Bracket, Governor gear Screw, 10-24 x 1/2" Cap, Upper valve spring Seal Assy., Intake valve Spring, Valve Cap, Lower valve spring * Gasket, Breather cover Body, Breather Element, Breather Cover, Valve spring Tube, Breather Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Nut & Lockwasher, 1/4-28 Clip, Primer line (Use as required) Screw, 1/4-28 x 1" * Gasket, Carburetor Pipe, Intake Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Screw, Torx T-30, 5/16-18 x 1-1/8 " * Gasket, Intake pipe Blower Housing (For electric starter) Screw, 5/16-18 x 3/4" (Use as require d) Screw, 5/16-24 x 21/32" Cover, Cylinder head Muffler Muffler (Optional quiet muffler)
	31588 650696		Plate, Muffler locking Screw, 5/16-18x2-3/4" (Used with 276A)


Dof #	Part Number	Otry Doc	corintion
	Part Number 651002	Qty Des	ew, 5/16-18 x 4-3/16"
	33013		
			ver, Starter bubble
	650760		rew, 8-32 x 3/8"
	32125		o, Starter
	35194		reen, Starter
	29752		t & Lockwasher, 1/4-28
	29774		el Line (Braided 8-1/4")(21 cm)(As req.)
	30705		el Line (Braided 16")(41 cm)(Use as req.)
	30962		el Line (Braided 32")(81 cm)(Use as req.)
	26460		mp, Fuel line (Use as required)
	650665		rew, 1/4-15 x 7/8"
300	34156A	Fuel	el Tank (Incl. 292 & 301) NOTE: These tanks were
		built	Itwith different size fuel inlet openings. Tanks with the
		1-3/ <sup>-</sup>	/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2	/2" I.D. opening use fuel cap 35355.
204	440444D	Гиа	
	410144B		el Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		el Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)	.)
301	34210	Fue	el Cap (Red Plastic) (Spurt Resistant, High Profile)
			3/16" I.D)
004	05055	`	
	35355		el Cap (Red plastic) (1-1/2" I.D.)
	33893A		pe, Oil fill
	33590		Ring
	34011A		estick (Incl. 306)
	33177		minal
	29443		o, Fuel line (Use as required)
	34246		o, Ground wire (Use as required)
	650765		rew, 10-32 x 1/2"
	35058		ver, Carburetor
	28942		rew, 10-32 x 3/8"
	34154		te, Fuel tank mounting
	34155		cket, Fuel tank mounting
	650561	Scre	rew, 1/4-20 x 5/8"
355	590574	Han	ndle, Mitten grip
356	650168	Was	sher, Flat
359	34141	Gua	ard, Starter
360	32576	Sea	al, Snow guard
364	33377	Brad	cket, Carburetor cover mounting
365	650767		rew, 8-32 x 27/64"
370J	34870	Dec	cal, Instruction Can be used on HM80 with diecast starter.
370C	34144	Dec	cal, Primer
370	34346	Dec	cal, Instruction
370D	34414	Dec	cal, Warning
370E	34589	Dec	cal, Choke
370E	34679	Dec	cal, Choke
	631021		et Needle, Seat & Clip Assy.
	632334A		rburetor (Incl. 184) (Refer to Division 5, Section A, page
			B for breakdown or Fiche18A-1, Grid F-5)
390	590573		wind Starter (Refer to Division 5, Section C, page 30 for
			akdown or Fiche 18A-1, Grid G-5)
	33279G		sket Set (Incl. items marked*)
408	35570		reen Seal (Can be used on HM80 with stamped steel
		reco	oil starter)

Ref #	Part Number	Qty	Description
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

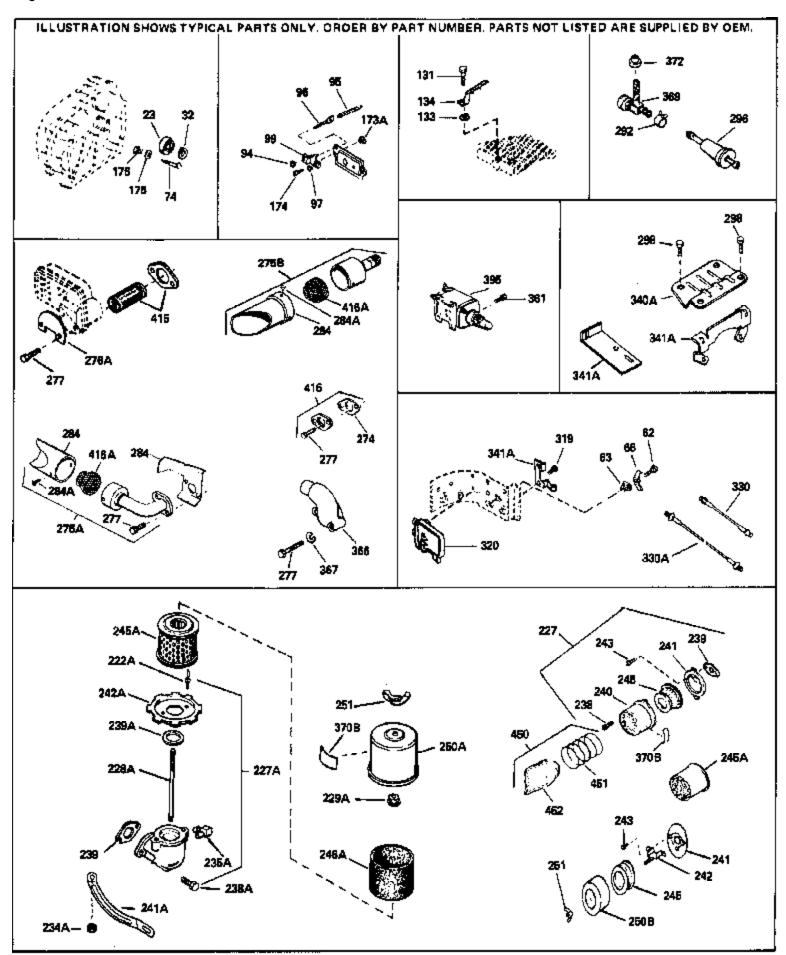

Def #	Dowl Museehou	Description
		Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
131	650738	Screw, 1/4-20 x 5/8" (Use as required )
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
	<b>T</b> 00404	
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
228Δ	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 7.33 (Use as required) (Used with drilled thru
220/1	000001	• • • •
		elbow)
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
		, ,
	35824	Muffler (Optional quiet muffler)
	651002	Screw, 5/16-18 x 4-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
369	35857	Valve, Fuel shut-off
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel
5.5-		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
400	25570	Caracia Cool (Combo wood on LIMO) with atominal atool
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
.00		starter)
		•
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
/111	35568	Debris Screen (Can be used on HM80 with stamped steel
411	33300	
		recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
	700400	,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
ADO	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
423	00000	Mechanics Handbook for installation instructions).
		moonanios nanabook ioi malailalion maliudiona).

Ref #	Part Number	Qty	Description
430	611077	•	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

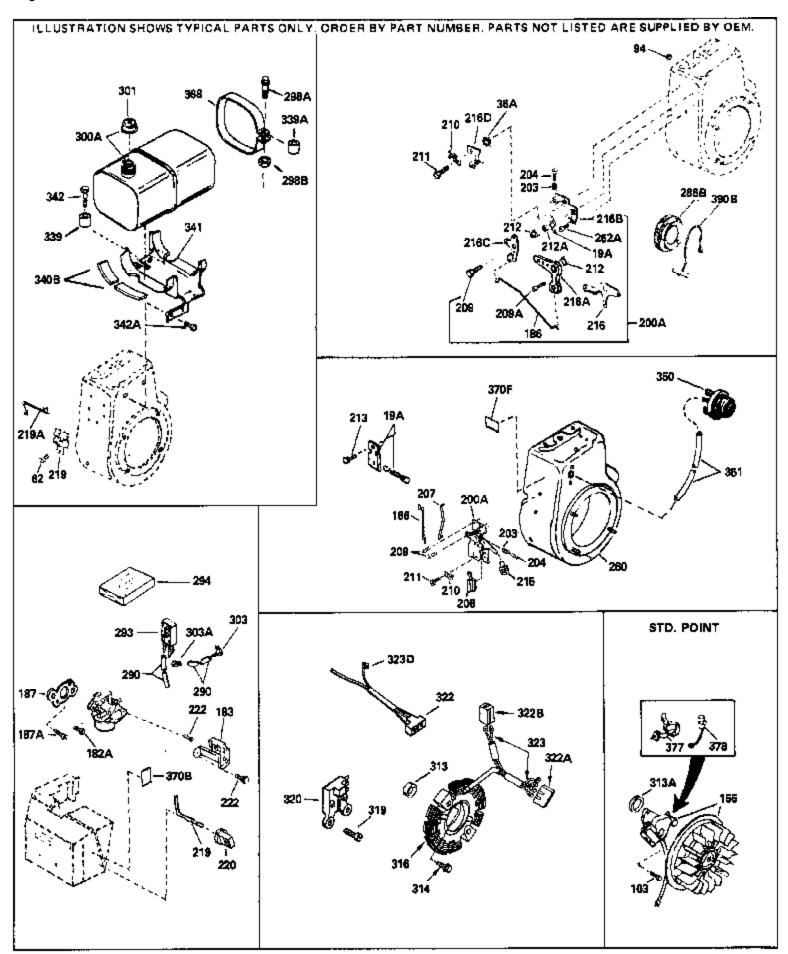

	D this is	<u> </u>
		Description
	650760	Screw, 8-32 x 3/8"
	650814	Screw, Torx T-15, 10-24 x 1"
	34587	Bracket, Choke
	34667	Link, Governor
	34677	Control Bracket (Incl.19,19A,203,204, 206,209)
	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
209	650821	Screw, 10-32 x 1/2"
215	32410	Knob, Control
219	34586	Rod, Choke
220	35438	Knob, Control
222	28820	Screw, 10-32 x 1/2"
260	35447A	Blower Housing (For electric starter)
275C	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
301	00002	I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	35189	Spacer, Coil
	650873	Screw, 1/4-20 x 3/4"
	611095	Alt.Coil (Incl.322E & 322D) (3 amp, A .C.)
	610823	Connector Terminal Mala
	610822	Terminal, Male
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570682	Primer Assy.
	32180C	Primer Line
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	0==00	,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
110	700070	used on HM80 with stamped steel recoil starter)
		,
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
/112	650907	Scrow 5/16 19 v 1 5/9" (Can be used on HM90 with
413	000907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
400	CE00C0	,
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077	-	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).