


Ref #	Part Number Q	y Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
15B	650494	Screw, 6-40 x 5/16"
15A	30700	Yoke, Governor
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
19	34663	Spring, Speed control
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	33365B	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, #8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
37A	30322	Locknut, Hex "Keps", 8-32
38	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
49	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
82	30591	Gear Assy., Governor (Incl. 81)
83	30588A	Spool, Governor
84	29193	Ring, Retaining
86	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650489	Screw, 1/4-20 x 5/8"

		D 1.0
Ref # Par		Description
108 297		Pin, Crankshaft gear
109 332		Gear, Crankshaft
110 342		Ground Wire
119 340		* Gasket, Head
120 340	030A	Head, Cylinder
125 278	378A	Exhaust Valve (Std.) (Incl. 151)
125 278	380A	Exhaust Valve (1/32" OS) (Incl. 151)
126 340	035	Intake Valve (Std.) (Incl. 151)
126 340	036	Intake Valve (1/32" OS) (Incl. 151)
127A 260		Washer, Flat (Use as required)
127A 650		Washer, Flat (Use as required)
127 650		Washer (Use as req., but not w/6021A screw)
128 650		Washer, Belleville
129 650		Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A 602		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1 002		650691 washer)
130 650	0694A	Screw, 5/16-18 x 2" (Use as required)
131A 650	0713	Screw, 5/16-18 x 5/8" (Use as require d)
131A 792	2028	Screw, 5/16-18 x 7/8" (Use as require d)
131 650	0802	Screw, 1/4-20 x 5/8" (Use as required)
131 650		Screw, 1/4-20 x 1/2" (Use as required)
131 650		Screw, 1/4-20 x 5/8" (Use as required)
135 336		Resistor Spark Plug (RJ17LM)
139 333		Bracket, Governor gear
140 650		Screw, 10-24 x 1/2"
149A 358		Seal Assy., Intake valve
149 278		Cap, Upper valve spring
150 278		Spring, Valve
151 325		Cap, Lower valve spring
169 278		* Gasket, Breather cover
170 284		Body, Breather
170 284		Element, Breather
171 284		·
		Cover, Valve spring
173 353		Tube, Breather
174 650		Screw, 10-24 x 1/2"
174 650		Screw, 10-24 x 5/8"
178 297		Nut & Lockwasher, 1/4-28
179B 305		Clip, Primer line (Use as required)
182 300		Screw, 1/4-28 x 1"
184 332		* Gasket, Carburetor
185 338		Pipe, Intake
203 313		Spring, Compression
204 650		Screw, 5-40 x 7/16"
206 610		Terminal Assy. (Use as required)
210 277	793	Clip, Conduit
211 289		Screw, 10-32 x 3/8"
223 650	0378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
224 279		* Gasket, Intake pipe
260 354		Blower Housing (For electric starter)
261 650		Screw, 5/16-18 x 3/4" (Use as require d)
262 297		Screw, 5/16-24 x 21/32"
265 332		Cover, Cylinder head
275C 358		Muffler (Optional quiet muffler)
275 341		Muffler (Spark Arresting)
276 315		Plate, Muffler locking
277 650		Screw, 5/16-18 x 3-3/16"
277 650 277A 650		Screw, 5/16-18x2-3/4" (Used with 276A)
211A 000	J030	OCIOW, J/ 10-10/2-3/4 (USGU WILLI Z/O/1)


281 282 286B 287 290 290 290 292 298 300	Part Number 33013 650760 33662 29752 29774 30705 30962 26460 650665 34156A	Qty	Description Cover, Starter bubble Screw, 8-32 x 3/8" Hub & Screen Assy., Starter Nut & Lockwasher, 1/4-28 Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 306 310 325 325 336 337 338 340 341 342 359 360 364 365 370D 370D 370J 370J	35355 33893A 33590 34011A 29443 34246 650765 34666 28942 34154 34155 650561 34141 32576 33377 650767 34414 34589 34346 34870 34144 631021 632111		Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Screw, 10-32 x 1/2" Cover, Carburetor Screw, 10-32 x 3/8" Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Guard, Starter Seal, Snow guard Bracket, Carburetor cover mounting Screw, 8-32 x 27/64" Decal, Warning Decal, Choke Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Decal, Primer Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 170 for breakdown or Fiche18A-1, Grid F-1)
390	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570		Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number Qty	Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

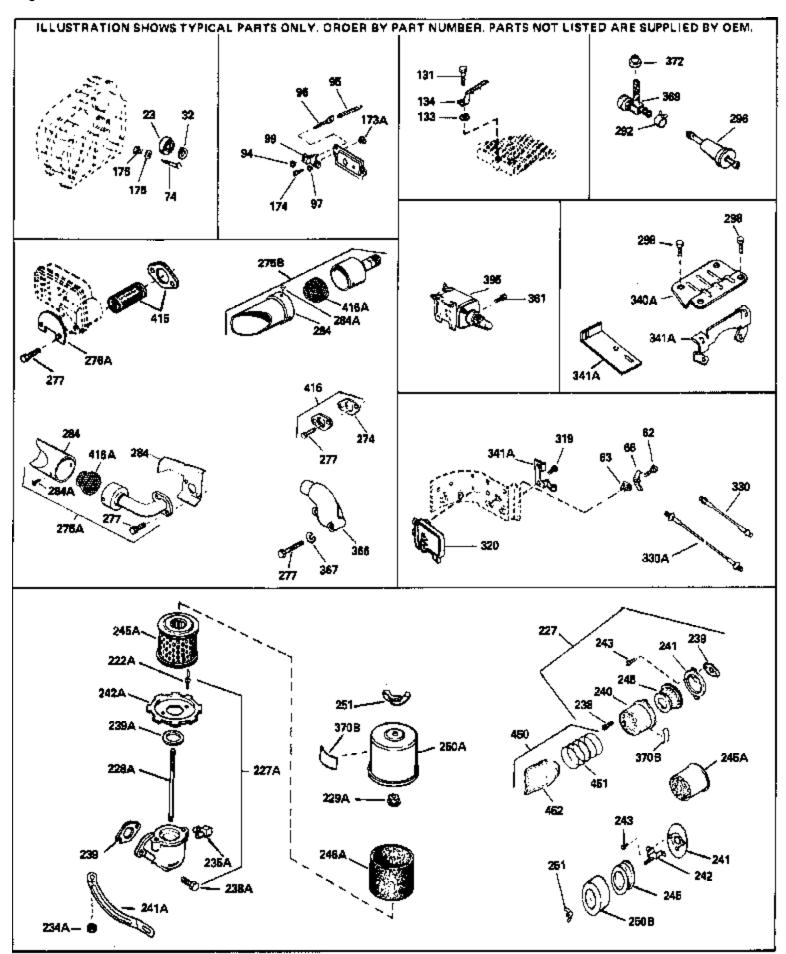

62 63 68 74 97 131 131 131 174	Part Number 650760 28545 33356 31855 650802 650737 650738 650128 650597 730127	Qty	Description Screw, 8-32 x 3/8" Grommet, Plastic Terminal, Ground Retainer, Bearing Lockwasher, Heavy split, #10 (Buy loc ally) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
	650824 650851		Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
274	34700 35865 391026		Element, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 277A 292 298 369 370J	35824 650729 650696 26460 650665 35857 34870 34387		Muffler (Optional quiet muffler) Screw, 5/16-18 x 3-3/16" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Valve, Fuel shut-off Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077	•	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

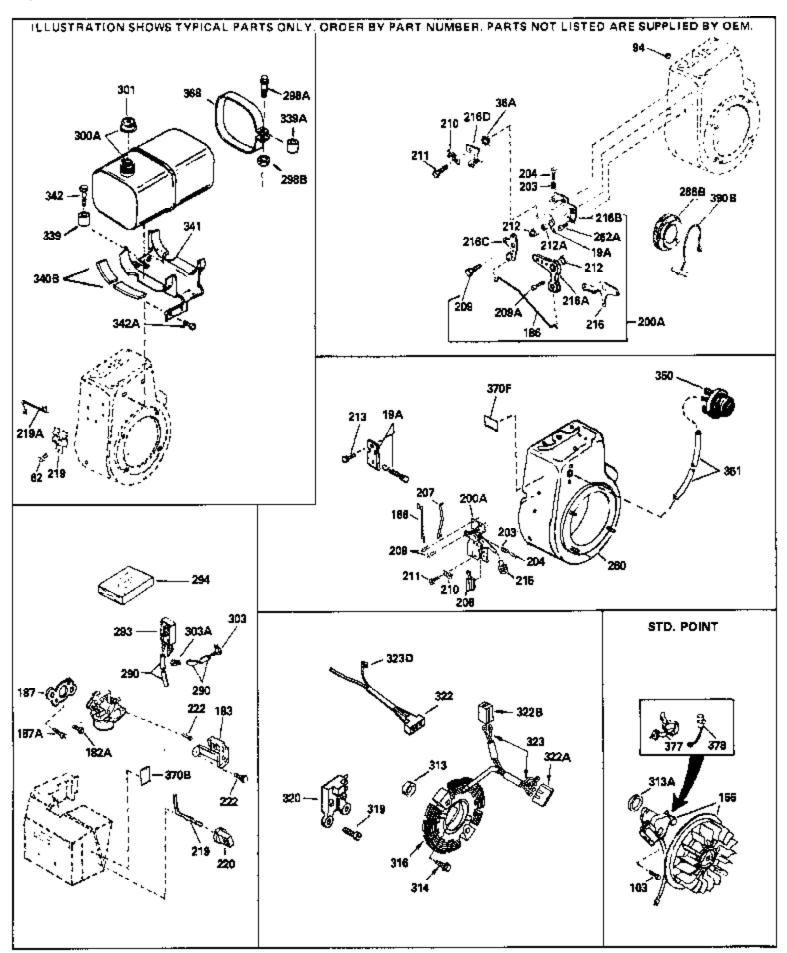

Ref #	Part Number	Qty	Description
62 103 156	650760 650489 610848		Screw, 8-32 x 3/8" Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic) (Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Rof #	Part Number 0	Qty Description
	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).