


Ref #	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	
		Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33365B	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553	Piston, Pin & Ring Set (.010" OS)
40	34554	Piston, Pin & Ring Set (.020" OS)
41	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
42	34332	Ring Set (Std.) (3-1/8" Bore)
42	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	<u> </u>
		Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
83	30588A	Spool, Governor
	29193	Ring, Retaining
86	650833	Screw, 1/4-20 x 1-3/16"
87	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
	650489	Screw, 1/4-20 x 5/8"
	29783	Pin, Crankshaft gear
.00		, 5.5

	Part Number	Qty	
	33245		Gear, Crankshaft
	34240		Ground Wire
	34041A		* Gasket, Head
	34030A		Head, Cylinder
	27878A		Exhaust Valve (Std.) (Incl. 151)
125	27880A		Exhaust Valve (1/32" OS) (Incl. 151)
126	34035		Intake Valve (Std.) (Incl. 151)
126	34036		Intake Valve (1/32" OS) (Incl. 151)
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
127	650691		Washer (Use as req., but not w/6021A screw)
128	650690		Washer, Belleville
129	650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
			650691 washer)
400	0500044		•
	650694A		Screw, 5/16-18 x 2" (Use as required)
	650802		Screw, 1/4-20 x 5/8" (Use as required )
	650737		Screw, 1/4-20 x 1/2" (Use as required )
	650738		Screw, 1/4-20 x 5/8" (Use as required )
	650713		Screw, 5/16-18 x 5/8" (Use as require d)
	792028		Screw, 5/16-18 x 7/8" (Use as require d)
	33636		Resistor Spark Plug (RJ17LM)
	33369		Bracket, Governor gear
	650836		Screw, 10-24 x 1/2"
	27882		Cap, Upper valve spring
	35862		Seal Assy., Intake valve
	27881		Spring, Valve
	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	29752		Nut & Lockwasher, 1/4-28
	30593		Clip, Primer line (Use as required)
	30088A		Screw, 1/4-28 x 1"
	33263		* Gasket, Carburetor
	33877		Pipe, Intake
	31342		Spring, Compression
	650549		Screw, 5-40 x 7/16"
	610973		Terminal Assy. (Use as required)
	27793		Clip, Conduit
	28942		Screw, 10-32 x 3/8"
	650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A		* Gasket, Intake pipe
	35447A		Blower Housing (For electric starter)
	650788		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
	35824		Muffler (Optional quiet muffler)
	34185A		Muffler (Spark Arresting)
	31588		Plate, Muffler locking
	650729		Screw, 5/16-18 x 3-3/16"
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
281	33013		Cover, Starter bubble


282 286B 287 290 290 290 292 298 300	Part Number 650760 33662 29752 29774 30705 30962 26460 650665 34156A	Qty	Description  Screw, 8-32 x 3/8"  Hub & Screen Assy., Starter  Nut & Lockwasher, 1/4-28  Fuel Line (Braided 8-1/4")(21 cm)(As req.)  Fuel Line (Braided 16")(41 cm)(Use as req.)  Fuel Line (Braided 32")(81 cm)(Use as req.)  Clamp, Fuel line (Use as required)  Screw, 1/4-15 x 7/8"  Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 306 310 325 325 336 337 338 340 341 342 359 360 364 365 370D 370D 370J 370J 370C 379 380	35355 33893A 33590 34011A 29443 34246 650765 34666 28942 34154 34155 650561 34141 32576 33377 650767 34414 34589 34346 34870 34144 631021 632111		Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Screw, 10-32 x 1/2" Cover, Carburetor Screw, 10-32 x 3/8" Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Guard, Starter Seal, Snow guard Bracket, Carburetor cover mounting Screw, 8-32 x 27/64" Decal, Warning Decal, Choke Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Decal, Primer Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 170 for breakdown or Fiche18A-1, Grid F-1)
390	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
	33279G 35570		Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

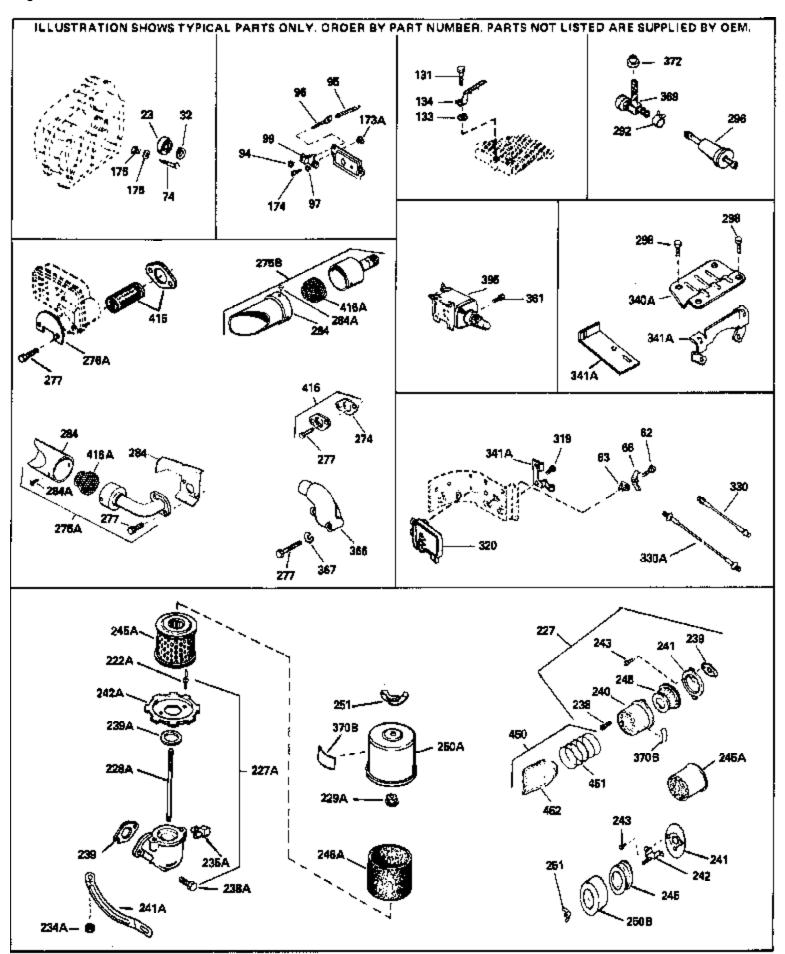

Pof #	Part Number Qty	/ Description
	650760 Qty	Description Scrow 9.32 x 3/9"
		Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	33356	Terminal, Ground
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
131	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
<u>LL I</u>	700127	(Use as required)
		(Ose as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
220 4	CE0904	Child 4/4 20 x 7 22 /Llas as required
	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
2454	34700	Element, Air cleaner
	35865	Gasket, Exhaust (Use as required)
2/30	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
275C	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
		·
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
	333232	motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		, ,
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	05500	,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
710	130010	used on HM80 with stamped steel recoil starter)
		used of Filvido with starriped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	CE0007	,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
720	100012	HM80 with die cast starter)
		,
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

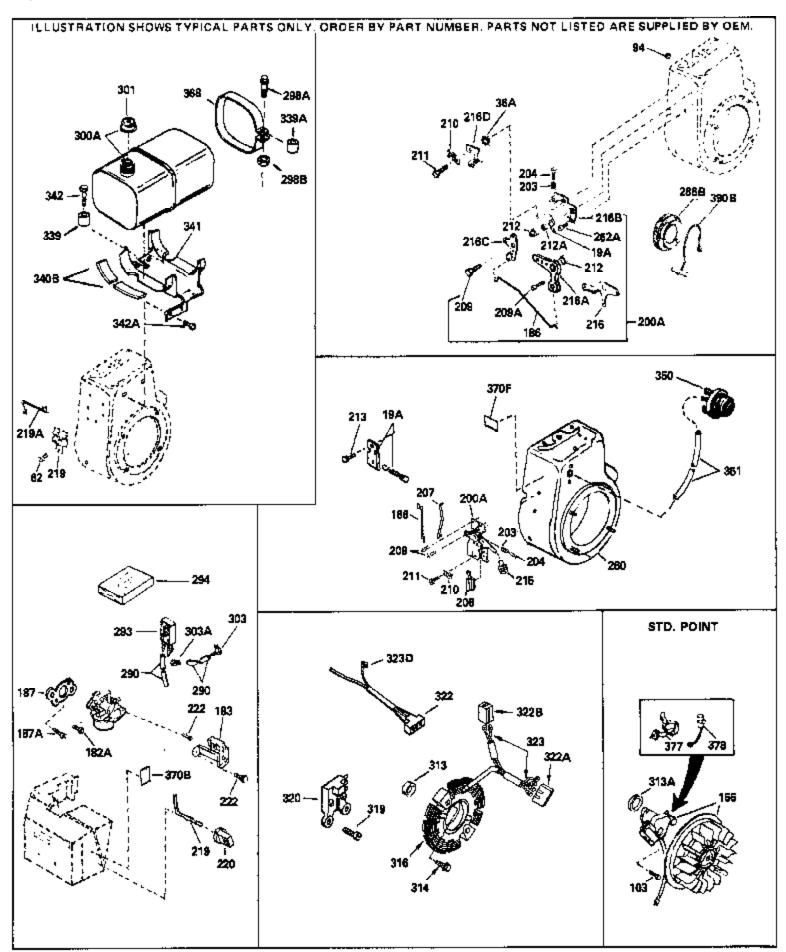

Ref #	Part Number Qt	/ Description
	650760	Screw, 8-32 x 3/8"
	650489	Screw, 1/4-20 x 5/8"
	610842	Magneto (Incl. 377 & 378) NOTE: The complete magneto is
150	0100-12	
		not available as an assembly. The magneto number is shown
		for reference purposes only. Order component parts
		individually, as shown in parts list. (Refer to Division 5,
		Section B, page 28 for breakdown or Fiche 18A-1, Grid G-1)
183	34587	Bracket, Choke
	34667	Link, Governor
	34664	Control Bracket (Incl.19,203,204,206, 209)
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	33878	Link, Governor-to-throttle
	650821	Screw, 10-32 x 1/2"
	27793	Clip, Conduit
	28942	•
		Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	35447A	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
204	05055	
	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570682	Primer Assy.
	32180C	Primer Line
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
370.1	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	30547A	Contact Assy., Breaker
	30548B	Condenser
	35570	Screen Seal (Can be used on HM80 with stamped steel
400	33370	recoil starter)
		,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
_		used on HM80 with stamped steel recoil starter)
111	25569	·
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
		room starter)

Ref #	Part Number	Qty	Description
	650907	<b>y</b>	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).