


	Part Number Qty	
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
	30969	Cap, Oil drain
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	33365B	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, #8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	
		Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
42	34333	Ring Set (.010" OS)
42	34334	Ring Set (.020" OS)
43	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
		•
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
70	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
00	32589	Key, Flywheel
	650815	Washer, Belleville
92	8116	Nut, Hex (1/2-20)
92 93		
92 93 101	610118	Cover, Spark plug (Use as required)
92 93 101 103		

	Dort Number (	Dt. Description
		Aty Description
	33245	Gear, Crankshaft
	34240	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
127A	26073	Washer, Flat (Use as required)
127A	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as required)
	6021A	Screw, $5/16-18 \times 1-1/2$ " (Use as required, but do notuse with
100/1		650691 washer)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
131	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	
		Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
184	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788 20747D	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	33280A	Muffler
	31588	Plate, Muffler locking
277	650729	Screw, 5/16-18 x 3-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
281	33013	Cover, Starter bubble
_		

		y Description
282	650760	Screw, 8-32 x 3/8"
286B	33662	Hub & Screen Assy., Starter
287	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
004	0.404.0	
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A	Tube, Oil fill
	33590	"O" Ring
		•
	34011A	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
325	34246	Clip, Ground wire (Use as required)
336	650765	Screw, 10-32 x 1/2"
337	34666	Cover, Carburetor
338	28942	Screw, 10-32 x 3/8"
	34154	Plate, Fuel tank mounting
	34155	Bracket, Fuel tank mounting
	650561	•
		Screw, 1/4-20 x 5/8"
	34141	Guard, Starter
	32576	Seal, Snow guard
	33377	Bracket, Carburetor cover mounting
365	650767	Screw, 8-32 x 27/64"
370D	34414	Decal, Warning
370E	34589	Decal, Choke
	34416	Decal, Instruction
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34417	•
		Decal, Primer
	631021	Inlet Needle, Seat & Clip Assy.
380	632111	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
		170 for breakdown or Fiche18A-1, Grid F-1)
200	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
050	000110	breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	25560	,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
- · · ·		
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)

Ref #	Part Number Q	ty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572	SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

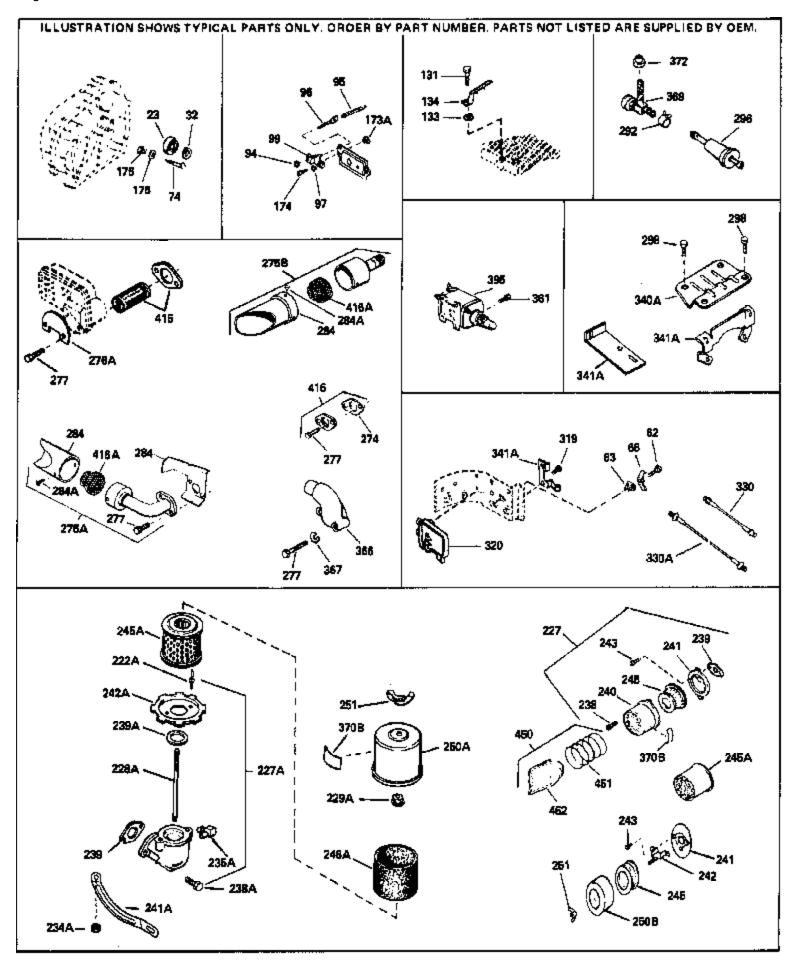

		/ Description
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	31855	Retainer, Bearing
	31000	
97		Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
ZZðA	1 COUCO	
		elbow)
0454	24700	Floment Air closer
	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
		can be used on any model.
275C	35824	Muffler (Optional quiet muffler)
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A )
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100		
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	130313	
		used on HM80 with stamped steel recoil starter)
111	35568	Debric Screen (Can be used on UM90 with stamped steel
411	30300	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
440	660007	Porous E/16 10 x 1 E/01/ (Con be used as LIN 100 with
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
- /		· ,
	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
0		HM80 with die cast starter)
		I INIOU WILLI UIE VASI SIALIEL
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
-120		
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).



		Description
62	650760	Screw, 8-32 x 3/8"
103	650489	Screw, 1/4-20 x 5/8"
	610848	Magneto (w/ring gear for 110 volt sta rter) NOTE: The
100		complete magneto is not available as an assembly. The
		magneto number is shown for reference purposes only. Orde
		component parts individually, as shown in parts list. (Refer to
		Division 5, Section B, page 28 for breakdown or Fiche 18A-1,
		Grid G
183	34587	Bracket, Choke
186	34667	Link, Governor
	34664	Control Bracket (Incl.19,203,204,206, 209)
	31342	
		Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
209	650821	Screw, 10-32 x 1/2"
	27793	Clip, Conduit
	28942	
		Screw, 10-32 x 3/8"
	34586	Rod, Choke
220	35438	Knob, Control
222	28820	Screw, 10-32 x 1/2"
260	35447A	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
290	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
001	04210	(1-3/16" I.D)
		(1-5/10/1.0)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
350	570682	Primer Assy.
351	32180C	Primer Line
	34387	Decal, Instruction Can be used on HM80 with stamped steel
370D	34307	
		recoil starter.
370.1	34870	Decal, Instruction Can be used on HM80 with diecast starter
	30547A	Contact Assy., Breaker
		•
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	2550	Spacer (Can be used on LINGO with stamped steel resoil
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
/10	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	100010	
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel

	Part Number	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).