


| | | Qty | Description |
|-----|---------|-----|---|
| | 34348B | | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| 2 | 27652 | | Pin, Dowel |
| 3 | 650820 | | Screw, 1/4-20 x 1/2" |
| 15 | 30699C | | Rod Assy., Governor (Incl. 15A & 15B) |
| 15B | 650494 | | Screw, 6-40 x 5/16" |
| 15A | 30700 | | Yoke, Governor |
| | 33454 | | Governor Lever Assy. |
| | 29916 | | Clamp, Governor lever |
| | 650548 | | Screw, 8-32 x 5/16" |
| | 34663 | | Spring, Speed control |
| | 32630 | | Seal, Oil |
| | 35256A | | Baffle, Blower housing |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 33365B | | Crankshaft (Incl. 108 & 109) |
| | 29826 | | Screw, 10-32 x 3/4" |
| | 29918 | | Lockwasher, # 8 E.T. |
| | 30322 | | Locknut, Hex "Keps", 8-32 |
| | 29216 | | Nut & Lockwasher, 10-32 "Keps" |
| | 29642 | | Ring, Retaining |
| | 34552 | | Piston, Pin & Ring Set (Std.) (3-1/8") |
| | 34553 | | Piston, Pin & Ring Set (30.) (31/8) Piston, Pin & Ring Set (.010" OS) |
| | 34554 | | |
| | 34329A | | Piston, Pin & Ring Set (.020" OS) Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
| | | | |
| | 34330A | | Piston & Pin Ass'y. (.010" OS)(Incl. 43) |
| | 34331A | | Piston & Pin Ass'y. (.020" OS)(Incl. 43) |
| | 34332 | | Ring Set (Std.) (3-1/8" Bore) |
| | 34333 | | Ring Set (.010" OS) |
| | 34334 | | Ring Set (.020" OS) |
| | 27888 | | Ring, Piston pin retaining |
| | 32591C | | Rod Assy., Connecting (Incl. 49) |
| | 650662C | | Bolt, Connecting rod (2 pieces) |
| | 34034 | | Lifter, Valve |
| | 34242 | | Dipper, Oil |
| | 34143 | | Camshaft (MCR) |
| | 33273A | | Extension, Blower housing |
| | 34126 | | Bracket, Grommet mounting |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet, Plastic |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 35262 | | * Gasket, Cylinder cover |
| | 33367B | | Cylinder Cover (Incl. 71, 75, 80, 311 & 312) |
| | 33368 | | Bushing, Crankshaft |
| | 27642 | | Plug, Oil drain |
| | 31950 | | Seal, Oil |
| | 31845 | | Shaft, Mechanical governor |
| | 30590A | | Washer, Flat |
| | 30591 | | Gear Assy., Governor (Incl. 81) |
| | 30588A | | Spool, Governor |
| 84 | 29193 | | Ring, Retaining |
| 86 | 650833 | | Screw, 1/4-20 x 1-3/16" |
| 87 | 650832 | | Screw, 1/4-20 x 1-11/16" |
| 89 | 32589 | | Key, Flywheel |
| | 650815 | | Washer, Belleville |
| | 8116 | | Nut, Hex (1/2-20) |
| | 610118 | | Cover, Spark plug (Use as required) |
| | 650516 | | Screw, 1/4-20 x 1-1/8 |
| | 29783 | | Pin, Crankshaft gear |
| | 33245 | | Gear, Crankshaft |
| | - | | , |
| | | | |

| | Part Number | Qty | Description |
|------|-------------|-----|--|
| | 34240 | | Ground Wire |
| | 34041A | | * Gasket, Head |
| 120 | 34030A | | Head, Cylinder |
| 125 | 27878A | | Exhaust Valve (Std.) (Incl. 151) |
| 125 | 27880A | | Exhaust Valve (1/32" OS) (Incl. 151) |
| 126 | 34035 | | Intake Valve (Std.) (Incl. 151) |
| | 34036 | | Intake Valve (1/32" OS) (Incl. 151) |
| | 26073 | | Washer, Flat (Use as required) |
| | 650570 | | Washer, Flat (Use as required) |
| | 650691 | | Washer (Use as req., but not w/6021A screw) |
| | 650690 | | Washer, Belleville |
| | | | |
| | 650727 | | Screw, 5/16-18 x 1-3/4" (Use as required) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| 130A | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| | | | 650691 washer) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| 131A | 792028 | | Screw, 5/16-18 x 7/8" (Use as require d) |
| 131 | 650802 | | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, $1/4-20 \times 5/8"$ (Use as required) |
| | 33636 | | Resistor Spark Plug (RJ17LM) |
| | 33369 | | Bracket, Governor gear |
| | 650836 | | Screw, 10-24 x 1/2" |
| | 27882 | | |
| | | | Cap, Upper valve spring |
| | 35862 | | Seal Assy., Intake valve |
| | 27881 | | Spring, Valve |
| | 32581 | | Cap, Lower valve spring |
| | 27896A | | * Gasket, Breather cover |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Valve spring |
| 173 | 35350 | | Tube, Breather |
| 174 | 650128 | | Screw, 10-24 x 1/2" |
| 174 | 650597 | | Screw, 10-24 x 5/8" |
| 178 | 29752 | | Nut & Lockwasher, 1/4-28 |
| 179B | 30593 | | Clip, Primer line (Use as required) |
| | 30088A | | Screw, 1/4-28 x 1" |
| | 33263 | | * Gasket, Carburetor |
| | 33877 | | Pipe, Intake |
| | 31342 | | Spring, Compression |
| | 650549 | | Screw, 5-40 x 7/16" |
| | 610973 | | |
| | | | Terminal Assy. (Use as required) |
| | 27793 | | Clip, Conduit |
| | 28942 | | Screw, 10-32 x 3/8" |
| | 650378 | | Screw, Torx T-30, 5/16-18 x 1-1/8 " |
| | 27915A | | * Gasket, Intake pipe |
| | 35447A | | Blower Housing (For electric starter) |
| | 650788 | | Screw, 5/16-18 x 3/4" (Use as require d) |
| 262 | 29747B | | Screw, 5/16-24 x 21/32" |
| 265 | 33272B | | Cover, Cylinder head |
| | 35824 | | Muffler (Optional quiet muffler) |
| | 33280A | | Muffler |
| | 31588 | | Plate, Muffler locking |
| | 650729 | | Screw, 5/16-18 x 3-3/16" |
| | 650696 | | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 33013 | | |
| | 50013 | | Cover, Starter bubble |
| | 650760 | | Screw, 8-32 x 3/8" |

| Ref # | Part Number | Otv De | escription |
|-------|-------------|----------|---|
| | 33662 | | ub & Screen Assy., Starter |
| | 29752 | | ut & Lockwasher, 1/4-28 |
| | 29774 | | |
| | | | uel Line (Braided 8-1/4")(21 cm)(As req.) |
| | 30705 | | uel Line (Braided 16")(41 cm)(Use as req.) |
| | 30962 | | uel Line (Braided 32")(81 cm)(Use as req.) |
| | 26460 | | amp, Fuel line (Use as required) |
| | 650665 | | crew, 1/4-15 x 7/8" |
| 300 | 34156A | | uel Tank (Incl. 292 & 301) NOTE: These tanks were |
| | | bui | iltwith different size fuel inlet openings. Tanks with the |
| | | 1-3 | 3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | 1-1 | 1/2" I.D. opening use fuel cap 35355. |
| 201 | 4404.440 | F | |
| | 410144B | | uel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | | uel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| | | I.D | D.) |
| 301 | 34210 | Fu | uel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| 001 | 01210 | | -3/16" I.D) |
| | | (1- | -0/10 I.D) |
| 301 | 35355 | Fu | uel Cap (Red plastic) (1-1/2" I.D.) |
| 305 | 33893A | Tu | ube, Oil fill |
| 306 | 33590 | |)" Ring |
| | 34011A | | pstick (Incl. 306) |
| | 29443 | | ip, Fuel line (Use as required) |
| | 34246 | | ip, Ground wire (Use as required) |
| | 650765 | | crew, 10-32 x 1/2" |
| | 34666 | | over, Carburetor |
| | 28942 | | crew, 10-32 x 3/8" |
| | | | |
| | 34154 | | ate, Fuel tank mounting |
| | 34155 | | acket, Fuel tank mounting |
| | 650561 | | crew, 1/4-20 x 5/8" |
| | 34141 | | uard, Starter |
| | 32576 | | eal, Snow guard |
| | 33377 | | acket, Carburetor cover mounting |
| | 650767 | | crew, 8-32 x 27/64" |
| | 34589 | De | ecal, Choke |
| 370 | 34346 | De | ecal, Instruction |
| 370A | 34686 | De | ecal, Name |
| 370C | 34144 | De | ecal, Primer |
| 370D | 34414 | | ecal, Warning |
| | 34870 | | ecal, Instruction Can be used on HM80 with diecast starter. |
| | 631021 | | let Needle, Seat & Clip Assy. |
| | 632111 | | arburetor (Incl. 184) (Refer to Division 5, Section A, page |
| 000 | 002111 | | 70 for breakdown or Fiche18A-1, Grid F-1) |
| | | | |
| 390 | 590479 | Re | ewind Starter (Refer to Division 5, Section C, page 30 for |
| | | bre | eakdown or Fiche 18A-1, Grid G-5) |
| 400 | 22270 | 0 | ealist Cat (leal items merical*) |
| | 33279G | | asket Set (Incl. items marked*) |
| 408 | 35570 | | creen Seal (Can be used on HM80 with stamped steel |
| | | rec | coil starter) |
| 409 | 35569 | Sn | bacer (Can be used on HM80 with stamped steel recoil |
| -00 | | • | arter) |
| | | | , |
| 410 | 730573 | De | ebris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| | | | ed on HM80 with stamped steel recoil starter) |
| ЛАА | 25569 | | · · · · |
| 411 | 35568 | | ebris Screen (Can be used on HM80 with stamped steel |
| | | rec | coil starter) |
| | | | |

| Ref # | Part Number Qt | y Description |
|-------|----------------------------|--|
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| 421 | 730225 730226 730572 | SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

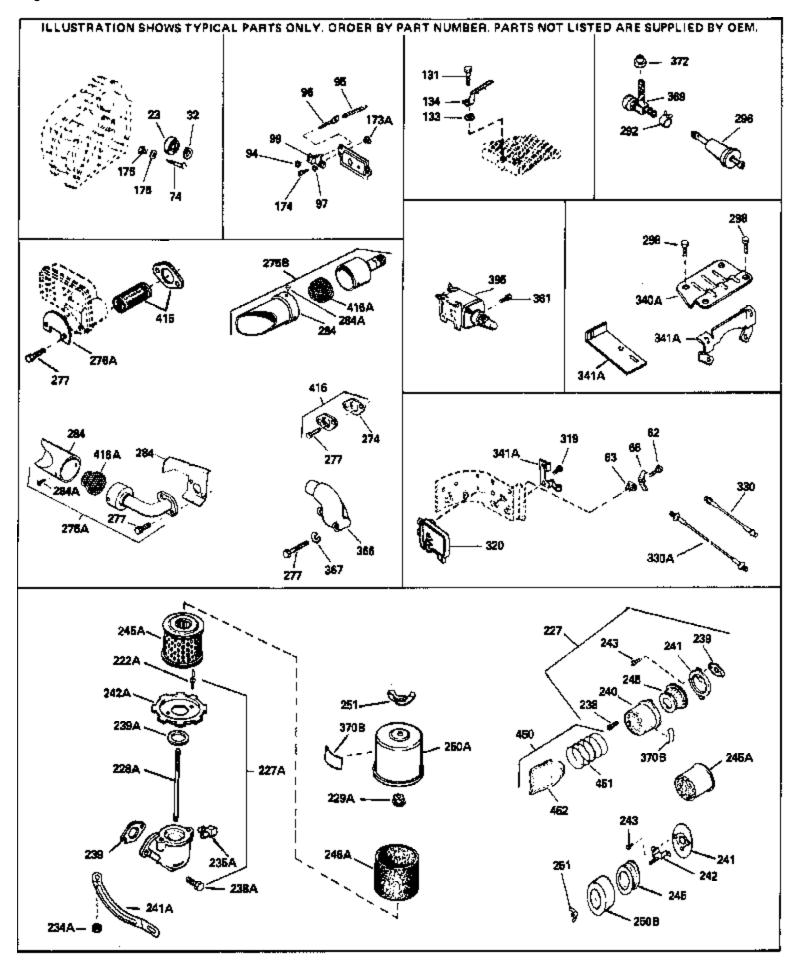

| | | / Description |
|------|---------|--|
| 62 | 650760 | Screw, 8-32 x 3/8" |
| 63 | 28545 | Grommet, Plastic |
| | 31855 | Retainer, Bearing |
| | 31000 | |
| 97 | | Lockwasher, Heavy split, #10 (Buy loc ally) |
| 131 | 650802 | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | Screw, 1/4-20 x 5/8" (Use as required) |
| | | |
| | 650128 | Screw, 10-24 x 1/2" |
| 174 | 650597 | Screw, 10-24 x 5/8" |
| 227 | 730127 | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) |
| | | (Use as required) |
| | | |
| 227 | 730164 | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use |
| | | as required) |
| | | as required) |
| 228A | 650824 | Stud, 1/4-20 x 7.33 (Use as required) |
| | 650851 | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| ZZðA | 1 COUCO | |
| | | elbow) |
| 0454 | 24700 | Floment Air closer |
| | 34700 | Element, Air cleaner |
| 274 | 35865 | Gasket, Exhaust (Use as required) |
| 275B | 391026 | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | | can be used on any model.) |
| | | can be used on any model. |
| 275C | 35824 | Muffler (Optional quiet muffler) |
| | 650729 | Screw, 5/16-18 x 3-3/16" |
| | | |
| | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| 292 | 26460 | Clamp, Fuel line (Use as required) |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| | | |
| | 35857 | Valve, Fuel shut-off |
| | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| 370B | 34387 | Decal, Instruction Can be used on HM80 with stamped steel |
| | | recoil starter. |
| | | |
| 395 | 33329D | Starter Motor Kit (110-120 Volt) This 110-120 volt starter |
| | | motor kit may have been added to this engine. It can be |
| | | |
| | | added only if cylinder hasdrilled and tapped starter mounting |
| | | bosses and a ring gear flywheel. Refer to service number |
| | | stamped on end cap of motor, or on decal for identification. |
| | | Ref |
| | | |
| 408 | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| | | |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil |
| 100 | | |
| | | starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| 410 | 130313 | |
| | | used on HM80 with stamped steel recoil starter) |
| 111 | 35568 | Debric Screen (Can be used on UM90 with stamped steel |
| 411 | 30300 | Debris Screen (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| 440 | 660007 | Porous E/16 10 x 1 E/01/ (Con be used as LIN 100 with |
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with |
| | | stamped steel recoil starter) |
| - / | | · , |
| | 730130 | Exh.Adapter Kit (Incl.274,277)(Use as req.) |
| 425 | 730572 | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on |
| 0 | | HM80 with die cast starter) |
| | | I INIOU WILLI UIE VASI SIALIEL |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to |
| -120 | | |
| | | Mechanics Handbook for installation instructions). |
| | | |

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |



| Ref # | Part Number Qty | Description |
|-------|-----------------|---|
| 62 | 650760 | Screw, 8-32 x 3/8" |
| 103 | 650516 | Screw, 1/4-20 x 1-1/8 |
| | 610982 | Magneto (w/ring gear) (12 Volt, 3 Amp) NOTE: The |
| 150 | 010902 | |
| | | complete magneto is not available as an assembly. The |
| | | magneto number is shown for reference purposes only. Orde |
| | | component parts individually, as shown in parts list. (Refer to |
| | | Division 5, Section B, page 36 for breakdown or Fiche 18A-1 |
| | | Grid G |
| | | Gilu G |
| 183 | 34587 | Bracket, Choke |
| | 34667 | Link, Governor |
| | 34664 | Control Bracket (Incl.19,203,204,206, 209) |
| | | |
| | 31342 | Spring, Compression |
| | 650549 | Screw, 5-40 x 7/16" |
| 206 | 610973 | Terminal Assy. (Use as required) |
| 207 | 33878 | Link, Governor-to-throttle |
| | 650821 | Screw, 10-32 x 1/2" |
| | | |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| 219 | 34586 | Rod, Choke |
| 220 | 35438 | Knob, Control |
| | 28820 | Screw, 10-32 x 1/2" |
| | 35447A | |
| | | Blower Housing (For electric starter) |
| | 35824 | Muffler (Optional quiet muffler) |
| 277A | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| 286B | 33662 | Hub & Screen Assy., Starter |
| | 29774 | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | 30705 | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| | | |
| | 30962 | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| 301 | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16 |
| | | I.D.) |
| | 0.1010 | |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/16" I.D) |
| 201 | 25255 | Fuel Can (Dad plastic) (1.1/0" I.D.) |
| | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| | 33876 | Gasket, Stator |
| 339 | 35038 | Spacer, Tank |
| 341 | 34155 | Bracket, Fuel tank mounting |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | | |
| | 570682 | Primer Assy. |
| | 32180C | Primer Line |
| 370B | 34387 | Decal, Instruction Can be used on HM80 with stamped stee |
| | | recoil starter. |
| | 0.4070 | |
| | 34870 | Decal, Instruction Can be used on HM80 with diecast starte |
| 377 | 30547A | Contact Assy., Breaker |
| 378 | 610767A | Condenser |
| | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| -100 | 00010 | · · · |
| | | recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil |
| | | starter) |
| | | |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| | | used on HM80 with stamped steel recoil starter) |
| | | / |
| | | |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |

| | Part Number | Qty Description |
|-----|-------------|---|
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| 425 | 730572 | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |