


Ref#	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
15A	30700	Yoke, Governor
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
	35256A	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	33459A	Crankshaft (Incl. 108 & 109)
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (0.10" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (0.10" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34786	Camshaft (MCR) (Extended)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	34787	Cover, Cylinder (Incl. 71, 75 & 80)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	28926	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	•
	650833	Ring, Retaining
		Screw, 1/4-20 x 1-3/16" Screw, 1/4-20 x 1-11/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589 650845	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
101	610118	Cover, Spark plug (Use as required)

Pof # Dort Nu	umbor Oti,	Description
Ref # Part Nu		Description
103 650489		Screw, 1/4-20 x 5/8"
108 29783		Pin, Crankshaft gear
109 33245		Gear, Crankshaft
110 34240		Ground Wire
119 34041A	1	* Gasket, Head
120 34030A	1	Head, Cylinder
125 27878A		Exhaust Valve (Std.) (Incl. 151)
125 27880A		Exhaust Valve (1/32" OS) (Incl. 151)
126 34035	•	Intake Valve (Std.) (Incl. 151)
126 34036		Intake Valve (3dd.) (Incl. 151)
127 650691		
		Washer (Use as req., but not w/6021A screw)
127A 26073		Washer, Flat (Use as required)
127A 650570		Washer, Flat (Use as required)
128 650690		Washer, Belleville
129 650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A 6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
400 050004	۸	•
130 650694		Screw, 5/16-18 x 2" (Use as required)
131A 650713		Screw, 5/16-18 x 5/8" (Use as require d)
131A 792028		Screw, 5/16-18 x 7/8" (Use as require d)
131 650802		Screw, 1/4-20 x 5/8" (Use as required)
131 650737		Screw, 1/4-20 x 1/2" (Use as required)
131 650738		Screw, 1/4-20 x 5/8" (Use as required)
135 33636		Resistor Spark Plug (RJ17LM)
139 33369		Bracket, Governor gear
140 650836		Screw, 10-24 x 1/2"
149 27882		Cap, Upper valve spring
149A 35862		Seal Assy., Intake valve
150 27881		•
		Spring, Valve
151 32581		Cap, Lower valve spring
169 27896A	1	* Gasket, Breather cover
170 28423		Body, Breather
171 28424		Element, Breather
172 28425		Cover, Valve spring
173 35350		Tube, Breather
174 650128		Screw, 10-24 x 1/2"
174 650597	,	Screw, 10-24 x 5/8"
178 29752		Nut & Lockwasher, 1/4-28
179B 30593		Clip, Primer line (Use as required)
182 30088A		Screw, 1/4-28 x 1"
184 33263	•	* Gasket, Carburetor
185 33877		Pipe, Intake
203 31342		Spring, Compression
204 650549		Screw, 5-40 x 7/16"
206 610973		Terminal Assy. (Use as required)
210 27793		Clip, Conduit
211 28942		Screw, 10-32 x 3/8"
223 650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
224 27915A		* Gasket, Intake pipe
260 35447A	1	Blower Housing (For electric starter)
261 650788		Screw, 5/16-18 x 3/4" (Use as require d)
262 29747B		Screw, 5/16-24 x 21/32"
265 33272B		Cover, Cylinder head
275 35056		Muffler
275C 35824		Muffler (Optional quiet muffler)
276 31588		Plate, Muffler locking
276 31366 277 651002		
211 001002		Screw, 5/16-18 x 4-3/16"


		_	
		Qty	Description
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
281	33013		Cover, Starter bubble
282	650760		Screw, 8-32 x 3/8"
286B	33662		Hub & Screen Assy., Starter
287	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
201	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
001	01210		(1-3/16" I.D)
			(1-3/10 1.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
305	33893A		Tube, Oil fill
306	33590		"O" Ring
	34011A		Dipstick (Incl. 306)
	29443		Clip, Fuel line (Use as required)
	34246		Clip, Ground wire (Use as required)
	35593		Ignition Key
	610973		Terminal Assy.
			• • • • • • • • • • • • • • • • • • •
	35305		Wire, Ground
	650765		Screw, 10-32 x 1/2"
	35057A		Cover, Carburetor
	28942		Screw, 10-32 x 3/8"
340	34154		Plate, Fuel tank mounting
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
359	34141		Guard, Starter
	32576		Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	35080		Decal, Instruction
	34414		Decal, Warning
			·
	34417		Decal, Primer
	34416		Decal, Instruction
	631021		Inlet Needle, Seat & Clip Assy.
380	632334A		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			188 for breakdown or Fiche18A-1, Grid F-5)
300	590479		Rewind Starter (Refer to Division 5, Section C, page 30 for
390	390479		,
			breakdown or Fiche 18A-1, Grid G-5)
400	33279G		Gasket Set (Incl. items marked*)
	35570		Screen Seal (Can be used on HM80 with stamped steel
100			recoil starter)
			room starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)

Ref #	Part Number	Qty	Description
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

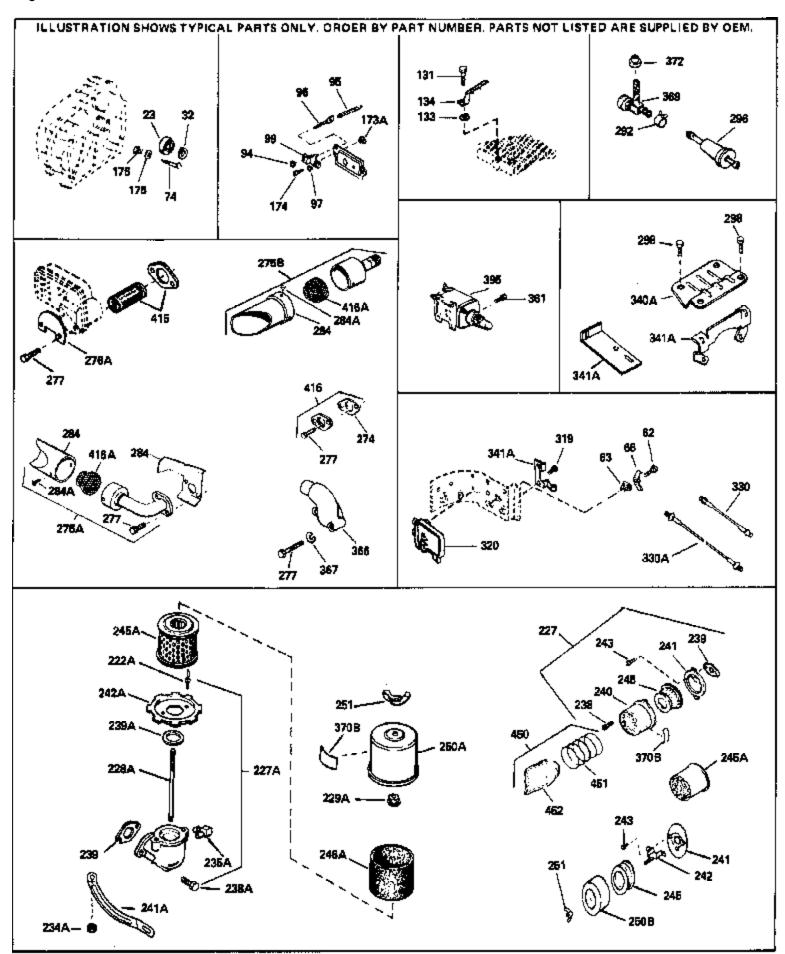

62 63 74 97 131 131 131 174	Part Number 650760 28545 31855 650802 650737 650738 650128 650597 730127	Qty	Description Screw, 8-32 x 3/8" Grommet, Plastic Retainer, Bearing Lockwasher, Heavy split, #10 (Buy loc ally) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
	650824 650851		Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
274	34700 35865 391026		Element, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 277A 292 298 330 369	35824 651002 650696 26460 650665 35305 35857 34387		Muffler (Optional quiet muffler) Screw, 5/16-18 x 4-3/16" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Wire, Ground Valve, Fuel shut-off Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	34870 33329D		Decal, Instruction Can be used on HM80 with diecast starter. Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

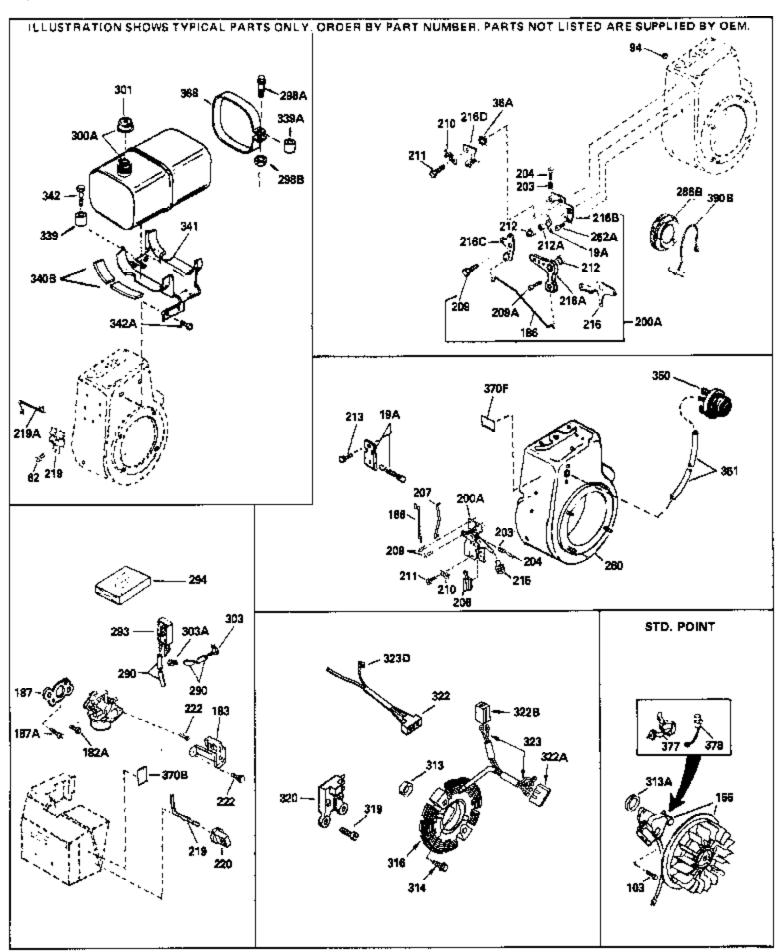

Ref #	Part Number	Qty	Description
62 103 156	650760 650489 610848		Screw, 8-32 x 3/8" Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G
186 200A 203 204 206 207 209 210 211 219 220 222 260 275C 277A 286B 290 290 290	34587 34667 34664 31342 650549 610973 33878 650821 27793 28942 34586 35438 28820 35447A 35824 650696 33662 29774 30705 30962 410144B 33032		Bracket, Choke Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Rod, Choke Knob, Control Screw, 10-32 x 1/2" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Cap (White Plastic) (Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
313A 339 341 342 350 351	35355 33876 35038 34155 650561 570682 32180C 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Primer Assy. Primer Line Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
377 378	34870 30547A 30548B 35570		Decal, Instruction Can be used on HM80 with diecast starter. Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)

Ref #	Part Number	Qty	Description
	650907	y	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).