


Ref #	Part Number Qt	y Description
	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652	Pin, Dowel
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
	30700	Yoke, Governor
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	32630	Seal, Oil
	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	35233	Crankshaft (Incl. 108 & 109)
32	33628	Washer, Thrust
35	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
42	34333	Ring Set (.010" OS)
42	34334	Ring Set (.020" OS)
43	27888	Ring, Piston pin retaining
45	32591C	Rod Assy., Connecting (Incl. 49)
47	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	
		Screw, 10-24 x 1/2"  * Cooleat Culinder cover
	35262	* Gasket, Cylinder cover
	33626B	Cyl. Cover (Incl.71,74,75,80,175,176, 311,312)
	27642	Plug, Oil drain
	33625	Seal, Oil
	31845	Shaft, Mechanical governor
	31947	Gear Assy., Governor
83	32324	Spool, Governor
84	29193	Ring, Retaining
86	650833	Screw, 1/4-20 x 1-3/16"
87	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611090	Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	35135	Lamination Assy., Solid State
	610118	Cover, Spark plug (Use as required)
	650872	Stud, Lamination mounting
	650814	Screw, Torx T-15, 10-24 x 1"
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
110	35183	Ground Wire

	5	<b>B</b> 1.4
		Description
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
127A	26073	Washer, Flat (Use as required)
127A	650570	Washer, Flat (Use as required)
127	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1	00217	650691 washer)
		•
130	650694A	Screw, 5/16-18 x 2" (Use as required)
131	650802	Screw, 1/4-20 x 5/8" (Use as required )
131	650737	Screw, 1/4-20 x 1/2" (Use as required )
131	650738	Screw, 1/4-20 x 5/8" (Use as required )
	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	
		Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
173	35350	Tube, Breather
174	650128	Screw, 10-24 x 1/2"
174	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	34707	Pipe, Intake
	610973	Terminal Assy. (Use as required)
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	33375D	Blower Housing (For electric starter)
	650788	
		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	33280A	Muffler
	650729	Screw, 5/16-18 x 3-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33013	Cover, Starter bubble
282	650760	Screw, 8-32 x 3/8"
285	32125	Cup, Starter
	35194	Screen, Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
230	00002	1 401 LITO (DIGIGOG OZ /(OT OTT)/(OSC GO 164.)


Ref #	Part Number	Qty Description
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
201	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
301	34210	(1-3/16" I.D)
		(1-3/10 1. <i>D)</i>
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
306	29673	* Gasket, Oil fill
310A	35941	Dipstick (Incl. 306)
325	29443	Clip, Fuel line (Use as required)
325	34246	Clip, Ground wire (Use as required)
340	34154	Plate, Fuel tank mounting
341	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34686	Decal, Name
	34346	Decal, Instruction
	631021	Inlet Needle, Seat & Clip Assy.
	632351	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
300	032331	188 for breakdown or Fiche18A-1, Grid F-5)
		100 Ioi bleakdowit of Fidie 10A-1, Glid F-3)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
		breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Cacket Sat (Incl. items marked*)
		Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	720572	Debrio Serson Kit (Incl. 260, 270P, 207, 411, 9,412) (Can be
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
442	650007	Corour F/16 10 v 1 F/0" (Con he used on LIM00 with
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
421	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
400	050000	Communication of Alberta
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
.50		Handbook for installation instructions).
40.4	500000	,
431	590609	Centering tube (Use with engines equipped with die cast
		aluminum starter)(Use as required) (Refer to Mechanics
		Handbook for installation instructions)

Ref #	Part Number Q	ty Description
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

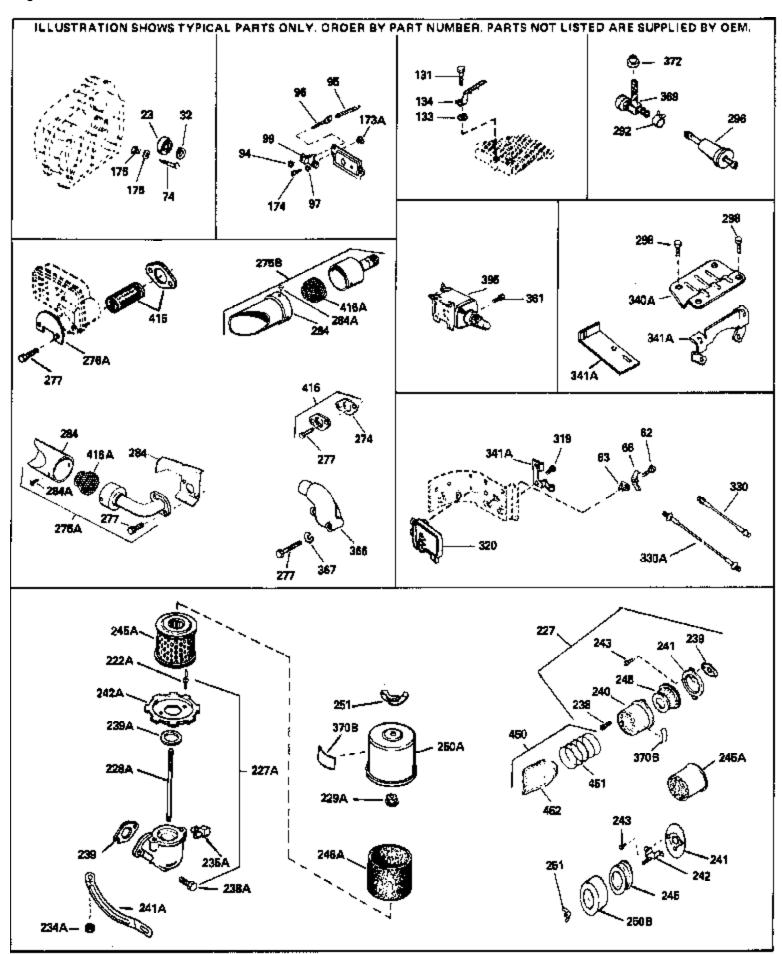

Def #	Don't Musselves	04.	Description
	Part Number	Qty	Description  Paging Pall
	33627		Bearing, Ball
	33628		Washer, Thrust
	650760		Screw, 8-32 x 3/8"
	28545		Grommet, Plastic
68	33356		Terminal, Ground
74	31855		Retainer, Bearing
94	33450		Nut Lock, 10-32
95	32329		Spring, Governor extension
96	30845A		Bolt, Governor spring adjusting
97			Lockwasher, Heavy split, #10 (Buy loc ally)
	650802		Screw, 1/4-20 x 5/8" (Use as required )
	650737		Screw, 1/4-20 x 1/2" (Use as required )
	650738		
			Screw, 1/4-20 x 5/8" (Use as required )
	650890		Washer, Lock, 5/16"
	30747		Clip, Spark plug shorting
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
175	650778		Lockwasher
176	650580		Nut, Lock, 10-24
227	730127		Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
			(Use as required)
007	700404		
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
			as required)
228Δ	650824		Stud, 1/4-20 x 7.33 (Use as required)
	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
2201	000001		·
			elbow)
239	27272A		* Gasket, Air cleaner
	27272A		* Gasket, Air cleaner
	33266		Bracket, Air cleaner
	33267		Bracket, Air cleaner
	28820		Screw, 10-32 x 1/2"
	33268		Element, Air cleaner
	34700		Element, Air cleaner
			•
	33269A		Cover, Air cleaner
	650513		Nut, Wing, 1/2-20
	35865		Gasket, Exhaust (Use as required)
	35824		Muffler (Optional quiet muffler)
275B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
2761	34479A		Snark Arrester Kit (Incl. 277A) (Also as an antional part)
			Spark Arrester Kit (Incl. 277A) (Also as an optional part)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
	650729		Screw, 5/16-18 x 3-3/16"
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387		Decal, Instruction Can be used on HM80 with stamped steel
			recoil starter.
205	22220D		Startor Motor Kit (110, 120, Volt) This 110, 120, volt startor
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter
			motor kit may have been added to this engine. It can be
			added only if cylinder hasdrilled and tapped starter mounting
			bosses and a ring gear flywheel. Refer to service number
			stamped on end cap of motor, or on decal for identification.
			Ref

Pof #	Part Number	Otv.	Description
	35570	Qty	Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

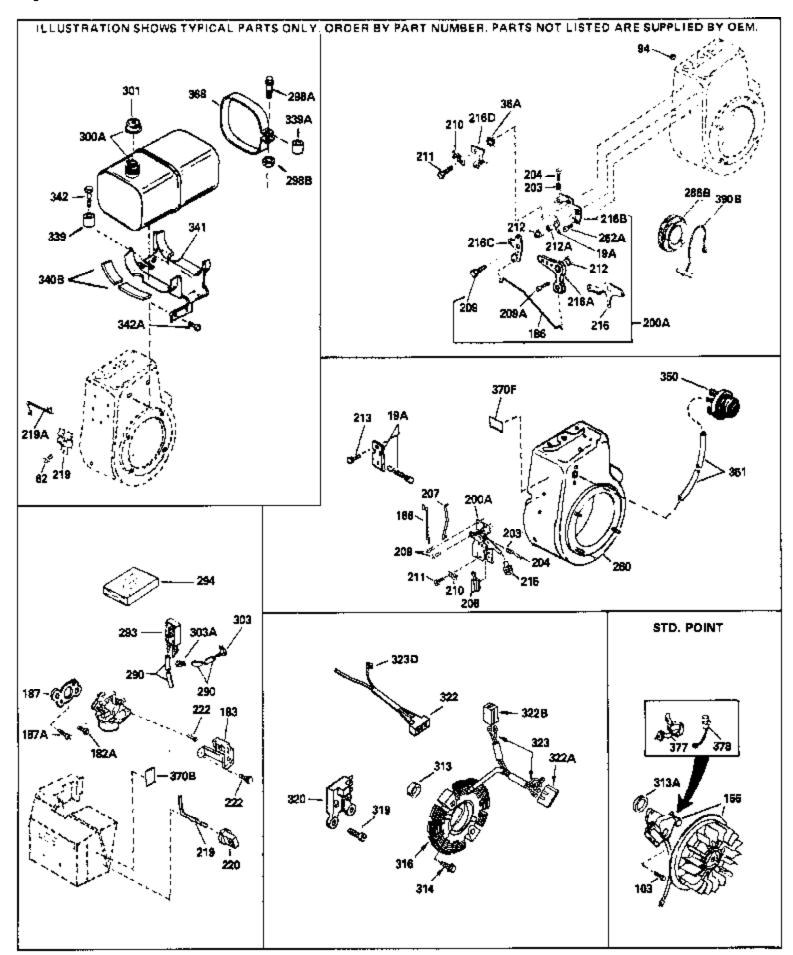

Rof #	Part Number	Otv.	Description
	650760	Qty	Screw, 8-32 x 3/8"
	33450		Nut Lock, 10-32
	650814		Screw, Torx T-15, 10-24 x 1"
	610973		
			Terminal Assy. (Use as required)
	33878 3337FD		Link, Governor-to-throttle
	33375D		Blower Housing (For electric starter)
	35824		Muffler (Optional quiet muffler)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
001	01210		(1-3/16" I.D)
			(1-3/10 1.5)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
339	35038		Spacer, Tank
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
370J	34870		Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387		Decal, Instruction Can be used on HM80 with stamped steel
			recoil starter.
400	25570		Carean Caal (Can be used on LIMO) with stamped steel
406	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
410	720572		Dobric Scroon Kit (Incl. 260, 270P, 207, 411, 8,412) (Can be
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
			used on filviou with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
440	050007		Corour E/AC 40 v 4 E/O!! /Coro ha wood on LIMOO with
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
			stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
			HM80 with die cast starter)
400	05000		•
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics
100	0.10.1		Handbook for installation instructions).
			,
431	590609		Centering tube (Use with engines equipped with die cast
			aluminum starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions)
<i>∆</i> 21	590610		Centering tube (Use as required) (Refer to Mechanics
<del>-1</del> 01	000010		Handbook for installation instructions).
			,
432	611078		A.C. Lighting Connector (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
ADD	611079		D.C. Charging Connector (Use as required) (Refer to
432	011013		Mechanics Handbook for installation instructions).
			medianes i androok ioi installation instructions).

Ref # Part Number	Qty Description
433 590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).