


Ref #	Part Number Qty	Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
15B	650494	Screw, 6-40 x 5/16"
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15A	30700	Yoke, Governor
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
19	34663	Spring, Speed control
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	35229	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C 34034	Bolt, Connecting rod (2 pieces) Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
82	30591	Gear Assy., Governor (Incl. 81)
83	30588A	Spool, Governor
84	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611091	Flywheel (w/ring gear)
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
100	35135	Lamination Assy., Solid State

D.(!!	Dad Market	D
		Description
	610118	Cover, Spark plug (Use as required)
	650872	Stud, Lamination mounting
	650814	Screw, Torx T-15, 10-24 x 1"
	29783	Pin, Crankshaft gear
109	33245	Gear, Crankshaft
110	35253	Ground Wire
119	34041A	* Gasket, Head
120	34030A	Head, Cylinder
125	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	650691	Washer (Use as req., but not w/6021A screw)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
	650713	
		Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
135	33636	Resistor Spark Plug (RJ17LM)
139	33369	Bracket, Governor gear
140	650836	Screw, 10-24 x 1/2"
149A	35862	Seal Assy., Intake valve
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	·
		Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178	29752	Nut & Lockwasher, 1/4-28
179B	30593	Clip, Primer line (Use as required)
182	30088A	Screw, 1/4-28 x 1"
184	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
		• •
	28942 650279	Screw, 10-32 x 3/8" Screw, Tory T 30, 5/46 18 x 1 1/8 "
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
262	29747B	Screw, 5/16-24 x 21/32"
265	33272B	Cover, Cylinder head
	35824	Muffler (Optional quiet muffler)
	35056	Muffler
210		


Ref#	Part Number	Qty	Description
276	31588		Plate, Muffler locking
277A	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
277	651002		Screw, 5/16-18 x 4-3/16"
	33013		Cover, Starter bubble
	650760		Screw, 8-32 x 3/8"
	32125		Cup, Starter
	35194		Screen, Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
300	34160A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
			, ,
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
204	24240		First Con (Dad Blockie) (Count Booletont Lligh Brofile)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A		Tube, Oil fill
	33590		"O" Ring
	34011A		•
			Dipstick (Incl. 306)
	29443		Clip, Fuel line (Use as required)
	34246		Clip, Ground wire (Use as required)
	650765		Screw, 10-32 x 1/2"
	35057A		Cover, Carburetor
	28942		Screw, 10-32 x 3/8"
340	34154		Plate, Fuel tank mounting
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
355	590574		Handle, Mitten grip
356	650168		Washer, Flat
	34141		Guard, Starter
	32576		Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	631021		Inlet Needle, Seat & Clip Assy.
380	632334A		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			188 for breakdown or Fiche18A-1, Grid F-5)
390	590606		Rewind Starter (Refer to Division 5, Section C, page 30 for
000	000000		breakdown or Fiche 18A-1, Grid G-5)
			organication of the ton-t, One O-oj
400	33279G		Gasket Set (Incl. items marked*)
408	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
. = =	05500		
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
<i>/</i> 10	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	100010		used on HM80 with stamped steel recoil starter)
			used of Filviou will startifed steel recoil starter)

Ref #	Part Number	Qty	Description
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572		SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

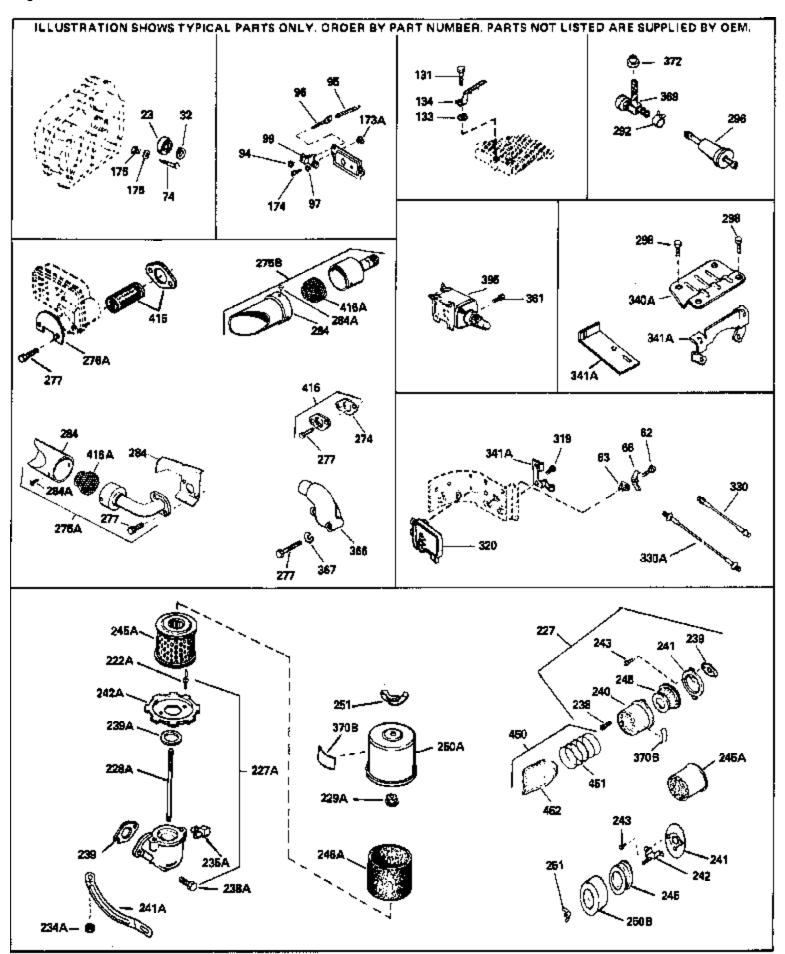

Ref #	Part Number C	Oty Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97	0.000	Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
221	730104	
		as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
,		elbow)
		,
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
.==0	05004	• ,
	35824	Muffler (Optional quiet muffler)
	651002	Screw, 5/16-18 x 4-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
369	35857	Valve, Fuel shut-off
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel
0.02	3.001	recoil starter.
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
∆∩Q	35569	Spacer (Can be used on HM80 with stamped steel recoil
703	33303	·
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
444	0.550	'
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
<i>/</i> /12	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
413	00001	stamped steel recoil starter)
		sianipeu sieei retuii sianei)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
	0.000	,
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

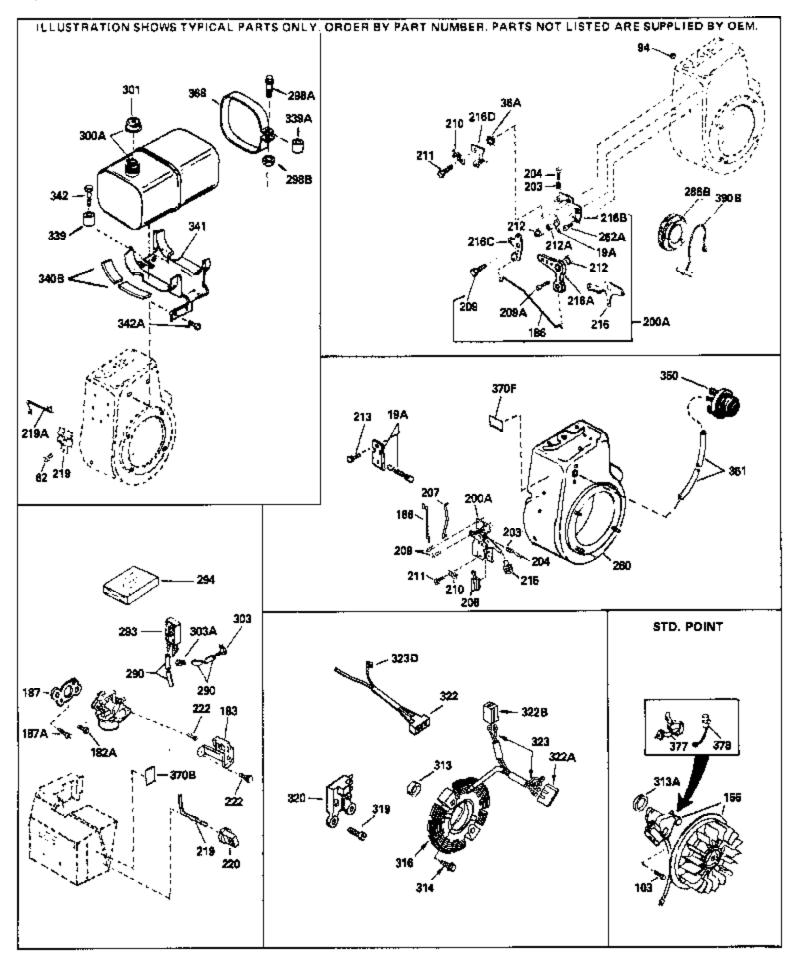

		Description
	650760	Screw, 8-32 x 3/8"
	650814	Screw, Torx T-15, 10-24 x 1"
	34587	Bracket, Choke
186	34667	Link, Governor
200A	34664	Control Bracket (Incl.19,203,204,206, 209)
203	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
209	650821	Screw, 10-32 x 1/2"
210	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	35447A	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
201	35355	Fuel Can (Pad plactic) (1.1/2" LD.)
	35038	Fuel Cap (Red plastic) (1-1/2" I.D.)
		Spacer, Tank Procket Fire tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570682	Primer Assy.
	32180C	Primer Line
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
3/0B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	2550	Chapter (Can be used on LIMOO with stamped steel receil
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
111	2550	Dahria Saraan (Can be used an HM90 with atomped atom
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
40 E	720572	•
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
400	644077	•
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
		Handbook for installation instructions).

Ref #	Part Number	Qty Description
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).