


| Ref # | Part Number | Qty | Description                                |
|-------|-------------|-----|--|
| 1     | 34348B      |     | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| 2     | 27652       |     | Pin, Dowel                                 |
| 3     | 650820      |     | Screw, 1/4-20 x 1/2"                       |
| 4     | 30968       |     | Nipple, Pipe                               |
|       | 30969       |     | Cap, Oil drain                             |
|       | 30700       |     | Yoke, Governor                             |
|       | 30699C      |     | Rod Assy., Governor (Incl. 15A & 15B)      |
|       | 650494      |     | Screw, 6-40 x 5/16"                        |
|       | 33454       |     | Governor Lever Assy.                       |
|       | 29916       |     | Clamp, Governor lever                      |
|       | 650548      |     | Screw, 8-32 x 5/16"                        |
|       | 34663       |     | Spring, Speed control                      |
|       | 32630       |     | Seal, Oil                                  |
|       | 35256A      |     | Baffle, Blower housing                     |
|       | 650561      |     | Screw, 1/4-20 x 5/8"                       |
|       | 33459A      |     | Crankshaft (Incl. 108 & 109)               |
|       | 29826       |     | Screw, 10-32 x 3/4"                        |
|       | 29918       |     | Lockwasher, # 8 E.T.                       |
|       | 29910       |     | Nut & Lockwasher, 10-32 "Keps"             |
|       | 30322       |     | Locknut, Hex "Keps", 8-32                  |
|       | 29642       |     | Ring, Retaining                            |
|       | 34552       |     |  |
|       |             |     | Piston, Pin & Ring Set (Std.) (3-1/8")     |
|       | 34553       |     | Piston, Pin & Ring Set (.010" OS)          |
|       | 34554       |     | Piston, Pin & Ring Set (.020" OS)          |
|       | 34329A      |     | Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
|       | 34330A      |     | Piston & Pin Ass'y. (.010" OS)(Incl. 43)   |
|       | 34331A      |     | Piston & Pin Ass'y. (.020" OS)(Incl. 43)   |
|       | 34332       |     | Ring Set (Std.) (3-1/8" Bore)              |
|       | 34333       |     | Ring Set (.010" OS)                        |
|       | 34334       |     | Ring Set (.020" OS)                        |
|       | 27888       |     | Ring, Piston pin retaining                 |
|       | 32591C      |     | Rod Assy., Connecting (Incl. 49)           |
|       | 650662C     |     | Bolt, Connecting rod (2 pieces)            |
|       | 34034       |     | Lifter, Valve                              |
|       | 34242       |     | Dipper, Oil                                |
|       | 34786       |     | Camshaft (MCR) (Extended)                  |
|       | 33273A      |     | Extension, Blower housing                  |
|       | 34126       |     | Bracket, Grommet mounting                  |
|       | 650760      |     | Screw, 8-32 x 3/8"                         |
|       | 28545       |     | Grommet, Plastic                           |
|       | 650128      |     | Screw, 10-24 x 1/2"                        |
|       | 35262       |     | * Gasket, Cylinder cover                   |
|       | 34787       |     | Cover, Cylinder (Incl. 71, 75 & 80)        |
|       | 33368       |     | Bushing, Crankshaft                        |
|       | 27642       |     | Plug, Oil drain                            |
|       | 31950       |     | Seal, Oil                                  |
|       | 28926       |     | Seal, Oil                                  |
|       | 31845       |     | Shaft, Mechanical governor                 |
|       | 30590A      |     | Washer, Flat                               |
|       | 30591       |     | Gear Assy., Governor (Incl. 81)            |
|       | 30588A      |     | Spool, Governor                            |
|       | 29193       |     | Ring, Retaining                            |
| 86    | 650833      |     | Screw, 1/4-20 x 1-3/16"                    |
| 87    | 650832      |     | Screw, 1/4-20 x 1-11/16"                   |
| 89    | 32589       |     | Key, Flywheel                              |
| 92    | 650815      |     | Washer, Belleville                         |
|       | 650863      |     | Nut, Hex (1/2-20) (Add-on alternator)      |
|       | 610118      |     | Cover, Spark plug (Use as required)        |
|       |             |     |  |

|      | 650489  | Screw, 1/4-20 x 5/8"   |
|------|---------|--|
|      | 29783   | Pin, Crankshaft gear   |
|      | 33245   | Gear, Crankshaft   |
| 110  | 34240   | Ground Wire  |
| 119  | 34041A  | * Gasket, Head   |
| 120  | 34030A  | Head, Cylinder   |
| 125  | 27878A  | Exhaust Valve (Std.) (Incl. 151)                             |
| 125  | 27880A  | Exhaust Valve (1/32" OS) (Incl. 151)                         |
|      | 34035   | Intake Valve (Std.) (Incl. 151)                              |
|      | 34036   | Intake Valve (1/32" OS) (Incl. 151)                          |
|      | 26073   | Washer, Flat (Use as required)                               |
|      | 650570  | Washer, Flat (Use as required)                               |
|      | 650691  | Washer (Use as req., but not w/6021A screw)                  |
|      | 650690  | Washer, Belleville   |
|      | 650727  | Screw, 5/16-18 x 1-3/4" (Use as required)                    |
|      | 650694A | Screw, 5/16-18 x 2" (Use as required)                        |
|      | 6021A   | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| 1304 | 002 TA  |  |
|      |         | 650691 washer)   |
| 131A | 650713  | Screw, 5/16-18 x 5/8" (Use as require d)                     |
| 131A | 792028  | Screw, 5/16-18 x 7/8" (Use as require d)                     |
| 131  | 650802  | Screw, 1/4-20 x 5/8" (Use as required )                      |
|      | 650737  | Screw, 1/4-20 x 1/2" (Use as required )                      |
|      | 650738  | Screw, 1/4-20 x 5/8" (Use as required )                      |
|      | 33636   | Resistor Spark Plug (RJ17LM)                                 |
|      | 33369   | Bracket, Governor gear                                       |
|      | 650836  | Screw, 10-24 x 1/2"  |
|      | 27882   | Cap, Upper valve spring                                      |
|      | 35862   | Seal Assy., Intake valve                                     |
|      | 27881   | Spring, Valve  |
|      | 32581   | Cap, Lower valve spring                                      |
|      | 27896A  | * Gasket, Breather cover                                     |
|      | 28423   | Body, Breather   |
|      | 28424   | •  |
|      | 28425   | Element, Breather  |
|      |         | Cover, Valve spring  |
|      | 35350   | Tube, Breather   |
|      | 650128  | Screw, 10-24 x 1/2"  |
|      | 650597  | Screw, 10-24 x 5/8"  |
|      | 29752   | Nut & Lockwasher, 1/4-28                                     |
|      | 30593   | Clip, Primer line (Use as required)                          |
|      | 30088A  | Screw, 1/4-28 x 1"   |
|      | 33263   | * Gasket, Carburetor   |
|      | 33877   | Pipe, Intake   |
|      | 31342   | Spring, Compression  |
|      | 650549  | Screw, 5-40 x 7/16"  |
|      | 610973  | Terminal Assy. (Use as required)                             |
|      | 27793   | Clip, Conduit  |
|      | 28942   | Screw, 10-32 x 3/8"  |
| 223  | 650378  | Screw, Torx T-30, 5/16-18 x 1-1/8 "                          |
| 224  | 27915A  | * Gasket, Intake pipe  |
| 260  | 35447A  | Blower Housing (For electric starter)                        |
|      | 650788  | Screw, 5/16-18 x 3/4" (Use as require d)                     |
|      | 29747B  | Screw, 5/16-24 x 21/32"                                      |
|      | 33272B  | Cover, Cylinder head   |
|      | 35824   | Muffler (Optional quiet muffler)                             |
|      | 35056   | Muffler  |
|      | 31588   | Plate, Muffler locking                                       |
|      | 651002  | Screw, 5/16-18 x 4-3/16"                                     |
| 211  |         |  |
|      |         |  |


|      |         | ty Description  |
|------|---------|---|
| 277A | 650696  | Screw, 5/16-18x2-3/4" (Used with 276A)  |
| 281  | 33013   | Cover, Starter bubble   |
| 282  | 650760  | Screw, 8-32 x 3/8"  |
| 286B | 33662   | Hub & Screen Assy., Starter   |
|      | 29752   | Nut & Lockwasher, 1/4-28  |
|      | 29774   | Fuel Line (Braided 8-1/4")(21 cm)(As req.)  |
|      | 30705   | Fuel Line (Braided 16")(41 cm)(Use as req.)   |
|      | 30962   | Fuel Line (Braided 32")(81 cm)(Use as req.)   |
|      | 26460   |   |
|      |         | Clamp, Fuel line (Use as required)  |
|      | 650665  | Screw, 1/4-15 x 7/8"  |
| 300  | 34156A  | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were  |
|      |         | builtwith different size fuel inlet openings. Tanks with the  |
|      |         | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the   |
|      |         | 1-1/2" I.D. opening use fuel cap 35355.   |
| 201  | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)  |
|      |         |   |
| 301  | 33032   | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16   |
|      |         | I.D.)   |
| 301  | 34210   | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)  |
|      |         | (1-3/16" I.D)   |
|      |         |   |
|      | 35355   | Fuel Cap (Red plastic) (1-1/2" I.D.)  |
| 305  | 33893A  | Tube, Oil fill  |
| 306  | 33590   | "O" Ring  |
| 310  | 34011A  | Dipstick (Incl. 306)  |
| 325  | 29443   | Clip, Fuel line (Use as required)   |
|      | 34246   | Clip, Ground wire (Use as required)   |
|      | 35593   | Ignition Key  |
|      | 610973  | Terminal Assy.  |
|      | 35305   | Wire, Ground  |
|      | 650765  | Screw, 10-32 x 1/2"   |
|      | 35057A  |   |
|      |         | Cover, Carburetor   |
|      | 28942   | Screw, 10-32 x 3/8"   |
|      | 34154   | Plate, Fuel tank mounting   |
|      | 34155   | Bracket, Fuel tank mounting   |
|      | 650561  | Screw, 1/4-20 x 5/8"  |
|      | 590574  | Handle, Mitten grip   |
|      | 650168  | Washer, Flat  |
| 359  | 34141   | Guard, Starter  |
| 360  | 32576   | Seal, Snow guard  |
| 364  | 33377   | Bracket, Carburetor cover mounting  |
| 365  | 650767  | Screw, 8-32 x 27/64"  |
|      | 34870   | Decal, Instruction Can be used on HM80 with diecast starter.  |
|      | 34414   | Decal, Warning  |
|      | 34416   | Decal, Instruction  |
|      | 34417   | Decal, Primer   |
|      | 34686   | Decal, Prine<br>Decal, Name   |
|      |         |   |
|      | 631021  | Inlet Needle, Seat & Clip Assy.   |
| 380  | 632334A | Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5) |
| 390  | 590606  | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)         |
| 400  | 33279G  | Gasket Set (Incl. items marked*)  |
| 100  |         |   |
| 408  | 35570   | Screen Seal (Can be used on HM80 with stamped steel   |

| Ref # | Part Number                | Qty D | Description  |
|-------|----------------------------|-------|--|
| 409   | 35569                      |       | Spacer (Can be used on HM80 with stamped steel recoil starter)   |
| 410   | 730573                     |       | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be<br>used on HM80 with stamped steel recoil starter)  |
| 411   | 35568                      |       | Debris Screen (Can be used on HM80 with stamped steel ecoil starter)   |
| 413   | 650907                     |       | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)  |
| 421   | 730225<br>730226<br>730572 |       | SAE 30, 4-Cycle Engine Oil (Quart)<br>SAE 5W30, 4-Cycle Engine Oil (Quart)<br>Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on<br>HM80 with die cast starter) |
| 429   | 650868                     |       | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to<br>Mechanics Handbook for installation instructions).  |
| 430   | 611077                     |       | Alternator, Add on (Use as required) (Refer to Mechanics<br>Handbook for installation instructions).   |
| 431   | 590609                     | а     | Centering tube (Use with engines equipped with die cast<br>aluminum starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions)           |
| 431   | 590610                     |       | Centering tube (Use as required) (Refer to Mechanics<br>Handbook for installation instructions).   |
| 432   | 611078                     |       | A.C. Lighting Connector (Use as required) (Refer to<br>Mechanics Handbook for installation instructions).  |
| 432   | 611079                     |       | D.C. Charging Connector (Use as required) (Refer to<br>Mechanics Handbook for installation instructions).  |
| 433   | 590611                     | а     | Alternator Shaft (4.00") (Use with engines equipped with cast<br>aluminum starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions).    |
| 433   | 590636                     | s     | Alternator Shaft (Use with engines equipped with stamped<br>steel starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions).            |

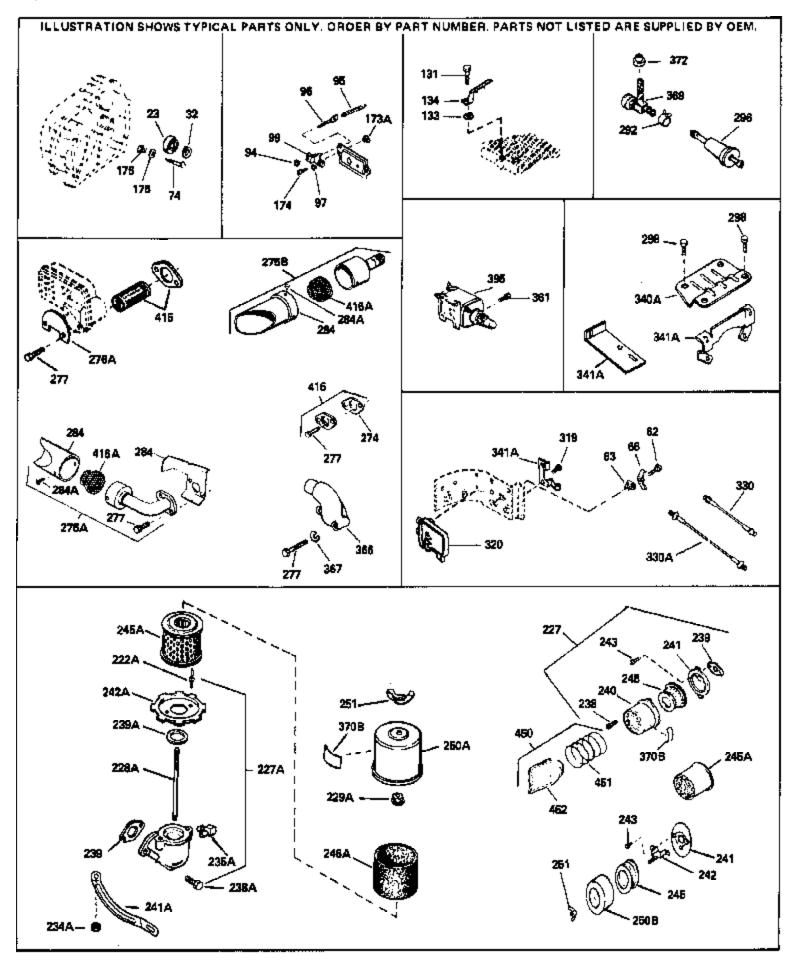

|       |         | / Description  |
|-------|---------|--|
|       | 650760  | Screw, 8-32 x 3/8"   |
| 63    | 28545   | Grommet, Plastic   |
| 74    | 31855   | Retainer, Bearing  |
| 97    |         | Lockwasher, Heavy split, #10 (Buy loc ally)  |
|       | 650802  |  |
|       |         | Screw, 1/4-20 x 5/8" (Use as required )  |
|       | 650737  | Screw, 1/4-20 x 1/2" (Use as required )  |
| 131   | 650738  | Screw, 1/4-20 x 5/8" (Use as required )  |
| 174   | 650128  | Screw, 10-24 x 1/2"  |
| 174   | 650597  | Screw, 10-24 x 5/8"  |
|       | 730127  | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)  |
|       |         | (Use as required)  |
|       |         |  |
| 227   | 730164  | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use  |
|       |         | as required)   |
|       | 0=000 / | · /  |
|       | 650824  | Stud, 1/4-20 x 7.33 (Use as required)  |
| 228A  | 650851  | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru   |
|       |         | elbow)   |
| 0454  | 24700   | ,  |
|       | 34700   | Element, Air cleaner   |
| 274   | 35865   | Gasket, Exhaust (Use as required)  |
| 275B  | 391026  | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler   |
|       |         | can be used on any model.)   |
|       |         | • ,  |
|       | 35824   | Muffler (Optional quiet muffler)   |
| 277   | 651002  | Screw, 5/16-18 x 4-3/16"   |
| 277A  | 650696  | Screw, 5/16-18x2-3/4" (Used with 276A)   |
|       | 26460   | Clamp, Fuel line (Use as required)   |
|       | 650665  | Screw, 1/4-15 x 7/8"   |
|       |         |  |
|       | 35305   | Wire, Ground   |
|       | 35857   | Valve, Fuel shut-off   |
| 370B  | 34387   | Decal, Instruction Can be used on HM80 with stamped steel  |
|       |         | recoil starter.  |
| 070   | 0.4070  | Decel lastruction Can be used as 10400 with discost starter  |
|       | 34870   | Decal, Instruction Can be used on HM80 with diecast starter.   |
| 395   | 33329D  | Starter Motor Kit (110-120 Volt) This 110-120 volt starter   |
|       |         | motor kit may have been added to this engine. It can be  |
|       |         | added only if cylinder hasdrilled and tapped starter mounting  |
|       |         | bosses and a ring gear flywheel. Refer to service number   |
|       |         | stamped on end cap of motor, or on decal for identification.   |
|       |         | •  |
|       |         | Ref  |
| 408   | 35570   | Screen Seal (Can be used on HM80 with stamped steel  |
|       | -       | recoil starter)  |
|       |         | ,  |
| 409   | 35569   | Spacer (Can be used on HM80 with stamped steel recoil  |
|       |         | starter)   |
|       | 200570  | ,  |
| 410   | 730573  | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be   |
|       |         | used on HM80 with stamped steel recoil starter)  |
| A A A | 25560   | Debrie Person (Con be used on LIN/00 with starsed start  |
| 411   | 35568   | Debris Screen (Can be used on HM80 with stamped steel  |
|       |         | recoil starter)  |
| /12   | 650907  | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with  |
| 413   |         |  |
|       |         | stamped steel recoil starter)  |
| 415   | 730130  | Exh.Adapter Kit (Incl.274,277)(Use as req.)  |
|       | 730572  | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on  |
| 420   | 130312  |  |
|       |         | HM80 with die cast starter)  |
| 420   | 650868  | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to  |
| τ∠J   |         | Mechanics Handbook for installation instructions).   |
|       |         | $\mathbf{W} = \mathbf{W} = $ |
|       |         |  |

| Ref # | Part Number | Qty | Description   |
|-------|-------------|-----|---|
| 430   | 611077      |     | Alternator, Add on (Use as required) (Refer to Mechanics<br>Handbook for installation instructions).  |
| 431   | 590609      |     | Centering tube (Use with engines equipped with die cast<br>aluminum starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions)        |
| 431   | 590610      |     | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 432   | 611078      |     | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 432   | 611079      |     | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 433   | 590611      |     | Alternator Shaft (4.00") (Use with engines equipped with cast<br>aluminum starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions). |
| 433   | 590636      |     | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).               |

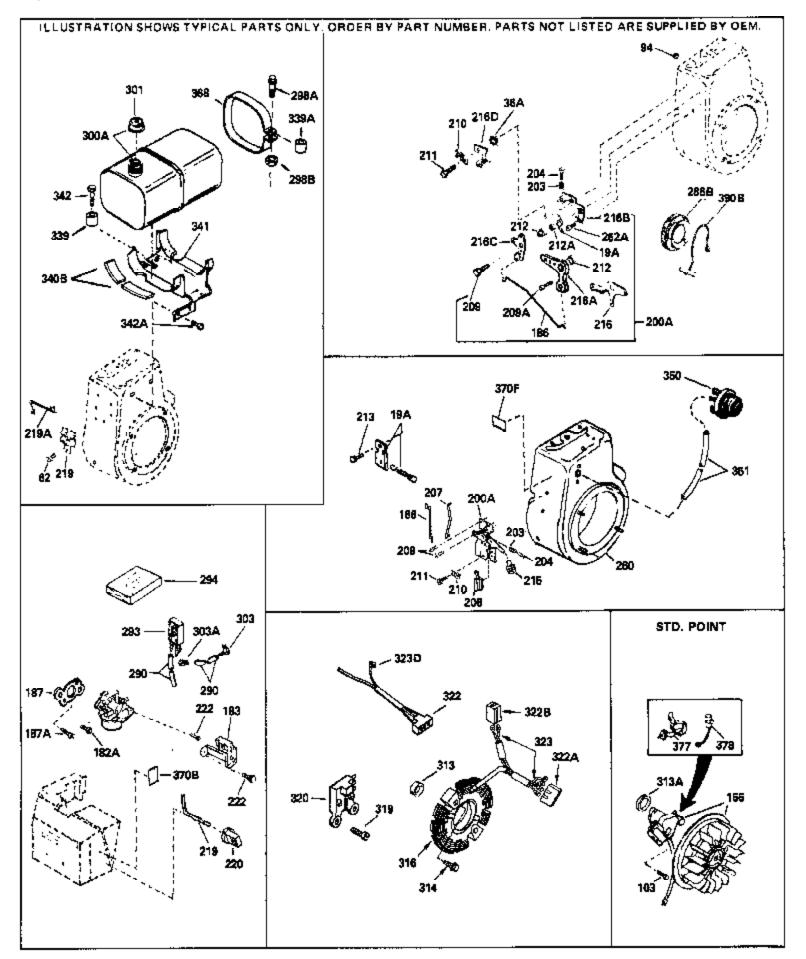

|       |         | Description   |
|-------|---------|---|
| 62    | 650760  | Screw, 8-32 x 3/8"  |
| 103   | 650489  | Screw, 1/4-20 x 5/8"  |
|       | 610848  | Magneto (w/ring gear for 110 volt sta rter) NOTE: The           |
| 100   |         | complete magneto is not available as an assembly. The           |
|       |         |   |
|       |         | magneto number is shown for reference purposes only. Order      |
|       |         | component parts individually, as shown in parts list. (Refer to |
|       |         | Division 5, Section B, page 28 for breakdown or Fiche 18A-1,    |
|       |         | Grid G  |
|       |         |   |
| 183   | 34587   | Bracket, Choke  |
| 186   | 34667   | Link, Governor  |
|       | 34664   | Control Bracket (Incl.19,203,204,206, 209)                      |
|       | 31342   |   |
|       |         | Spring, Compression   |
|       | 650549  | Screw, 5-40 x 7/16"   |
|       | 610973  | Terminal Assy. (Use as required)                                |
| 207   | 33878   | Link, Governor-to-throttle                                      |
| 209   | 650821  | Screw, 10-32 x 1/2"   |
|       | 27793   | Clip, Conduit   |
|       | 28942   |   |
|       |         | Screw, 10-32 x 3/8"   |
|       | 34586   | Rod, Choke  |
| 220   | 35438   | Knob, Control   |
| 222   | 28820   | Screw, 10-32 x 1/2"   |
|       | 35447A  | Blower Housing (For electric starter)                           |
|       | 35824   |   |
|       |         | Muffler (Optional quiet muffler)                                |
|       | 650696  | Screw, 5/16-18x2-3/4" (Used with 276A )                         |
| 286B  | 33662   | Hub & Screen Assy., Starter                                     |
| 290   | 29774   | Fuel Line (Braided 8-1/4")(21 cm)(As req.)                      |
| 290   | 30705   | Fuel Line (Braided 16")(41 cm)(Use as req.)                     |
|       | 30962   | Fuel Line (Braided 32")(81 cm)(Use as req.)                     |
|       | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)                      |
|       |         |   |
| 301   | 33032   | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"  |
|       |         | I.D.)   |
| 301   | 34210   | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)          |
| 501   | 57210   | (1-3/16" I.D)   |
|       |         | (1-5/10 I.D)  |
| 301   | 35355   | Fuel Cap (Red plastic) (1-1/2" I.D.)                            |
|       | 33876   | Gasket, Stator  |
|       |         |   |
|       | 35038   | Spacer, Tank  |
|       | 34155   | Bracket, Fuel tank mounting                                     |
| 342   | 650561  | Screw, 1/4-20 x 5/8"  |
| 350   | 570682  | Primer Assy.  |
|       | 32180C  | Primer Line   |
|       | 34387   |   |
| 3/00  | 34307   | Decal, Instruction Can be used on HM80 with stamped steel       |
|       |         | recoil starter.   |
| 370 I | 34870   | Decal, Instruction Can be used on HM80 with diecast starter.    |
|       |         |   |
|       | 30547A  | Contact Assy., Breaker  |
|       | 30548B  | Condenser   |
| 408   | 35570   | Screen Seal (Can be used on HM80 with stamped steel             |
|       |         | recoil starter)   |
|       |         | , , , , , , , , , , , , , , , , , , ,                           |
| 409   | 35569   | Spacer (Can be used on HM80 with stamped steel recoil           |
|       |         | starter)  |
| 110   | 700570  |   |
| 410   | 730573  | Debris Screen Kit (Incl. 360, 370B, 387, 411 & 413) (Can be     |
|       |         | used on HM80 with stamped steel recoil starter)                 |
| /11   | 35568   | Debris Screen (Can be used on HM80 with stamped steel           |
| 411   | 00000   | שבאהש שכובבה (שמוד אב עשבע טודר וואוטט אונוד אמוווףבע אנפר      |
|       |         | recoil starter)   |

|     | Part Number | Qty Description   |
|-----|-------------|---|
| 413 | 650907      | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)   |
| 425 | 730572      | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)   |
| 429 | 650868      | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 430 | 611077      | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 431 | 590609      | Centering tube (Use with engines equipped with die cast<br>aluminum starter)(Use as required) (Refer to Mechanics<br>Handbook for installation instructions)  |
| 431 | 590610      | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 432 | 611078      | A.C. Lighting Connector (Use as required) (Refer to<br>Mechanics Handbook for installation instructions).   |
| 432 | 611079      | D.C. Charging Connector (Use as required) (Refer to<br>Mechanics Handbook for installation instructions).   |
| 433 | 590611      | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636      | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).         |