


Ref #	Part Number Qt	y Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
2	27652	Pin, Dowel
3	650820	Screw, 1/4-20 x 1/2"
4	30968	Nipple, Pipe
5	30969	Cap, Oil drain
15A	30700	Yoke, Governor
15	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15B	650494	Screw, 6-40 x 5/16"
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
19	34663	Spring, Speed control
20	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	35198	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
36	29918	Lockwasher, # 8 E.T.
37A	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C 650662C	Rod Assy., Connecting (Incl. 49) Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
	34143	Camshaft (MCR)
	33273A	Extension, Blower housing
	34126	Bracket, Grommet mounting
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
71	33368	Bushing, Crankshaft
72	27642	Plug, Oil drain
75	31950	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
82	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611093	Flywheel (3 amp, w/ring gear)
	650815	Washer, Belleville
	650863	Nut, Hex (1/2-20) (Add-on alternator)
100	35135	Lamination Assy., Solid State

	Part Number Qty	
	610118	Cover, Spark plug (Use as required)
102	650872	Stud, Lamination mounting
103	650814	Screw, Torx T-15, 10-24 x 1"
108	29783	Pin, Crankshaft gear
109	33245	Gear, Crankshaft
110	35253	Ground Wire
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	650691	Washer (Use as req., but not w/6021A screw)
	26073	
	650570	Washer, Flat (Use as required)
		Washer, Flat (Use as required)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
131Δ	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	35862	Seal Assy., Intake valve
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	Cap, Lower valve spring
169	27896A	* Gasket, Breather cover
170	28423	Body, Breather
171	28424	Element, Breather
172	28425	Cover, Valve spring
173	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
	31342	Spring, Compression
	650549	Screw, 5-40 x 7/16"
	610973	Terminal Assy. (Use as required)
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
275C	35824	Muffler (Optional quiet muffler)
275	35056	Muffler


276 277A 277 281 282 285 286A 287 290 290 290 292 298	Part Number 31588 650696 651002 33013 650760 32125 35194 29752 29774 30705 30962 26460 650665 34156A	Qty	Description Plate, Muffler locking Screw, 5/16-18x2-3/4" (Used with 276A) Screw, 5/16-18 x 4-3/16" Cover, Starter bubble Screw, 8-32 x 3/8" Cup, Starter Screen, Starter Nut & Lockwasher, 1/4-28 Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
305 306 310 324 325 325 328 329 330 336 337 338 340 341 342 355 356 359 360 364 365 370D 370C 370A 370E 370J 379 380	35355 33893A 33590 34011A 33177 29443 34246 35593 610973 35305 650765 35057A 28942 34154 34155 650561 590574 650168 34141 32576 33377 650767 34414 34417 34686 34416 35080 34870 631021 632334A		Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Terminal Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Ignition Key Terminal Assy. Wire, Ground Screw, 10-32 x 1/2" Cover, Carburetor Screw, 10-32 x 3/8" Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Handle, Mitten grip Washer, Flat Guard, Starter Seal, Snow guard Bracket, Carburetor cover mounting Screw, 8-32 x 27/64" Decal, Warning Decal, Primer Decal, Instruction Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5) Rewind Starter (Refer to Division 5, Section C, page 30 for
390	000010		breakdown or Fiche 18A-1, Grid G-5)

Ref #	Part Number	Qty	Description
	33279G 35570		Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
421	730225 730226 730572		SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

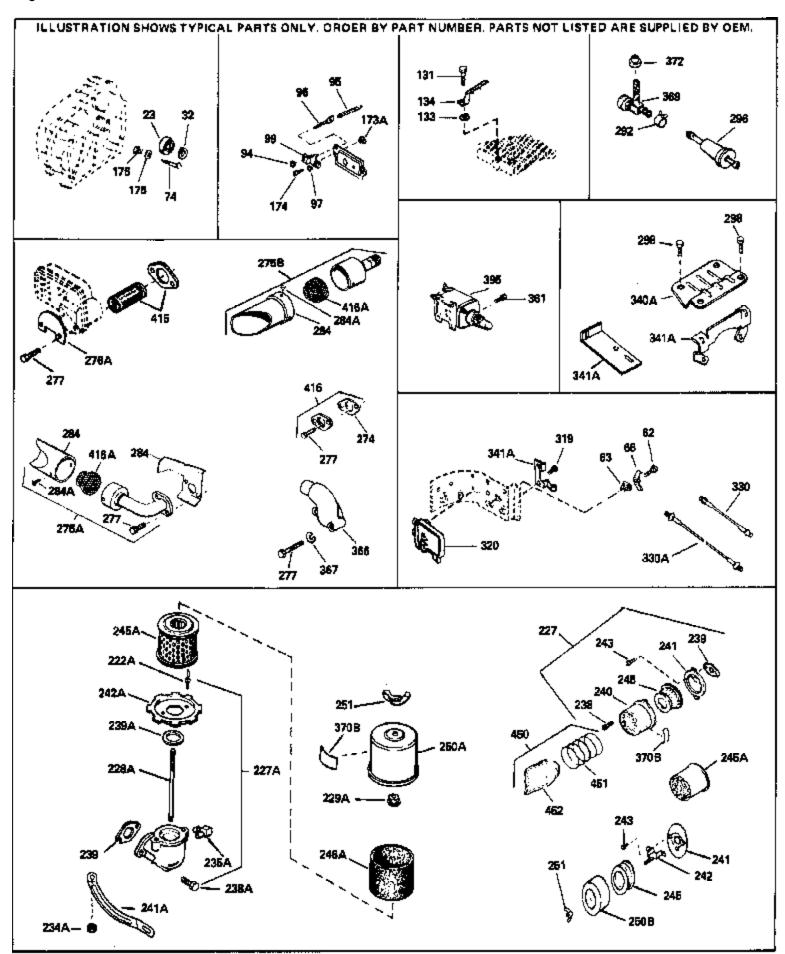

62 63 74 97 131 131 131 174	Part Number 650760 28545 31855 650802 650737 650738 650128 650597 730127	Qty	Description Screw, 8-32 x 3/8" Grommet, Plastic Retainer, Bearing Lockwasher, Heavy split, #10 (Buy loc ally) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
	650824 650851		Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
274	34700 35865 391026		Element, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 277A 292 298 330 369	35824 651002 650696 26460 650665 35305 35857 34387		Muffler (Optional quiet muffler) Screw, 5/16-18 x 4-3/16" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Wire, Ground Valve, Fuel shut-off Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
	34870 33329D		Decal, Instruction Can be used on HM80 with diecast starter. Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

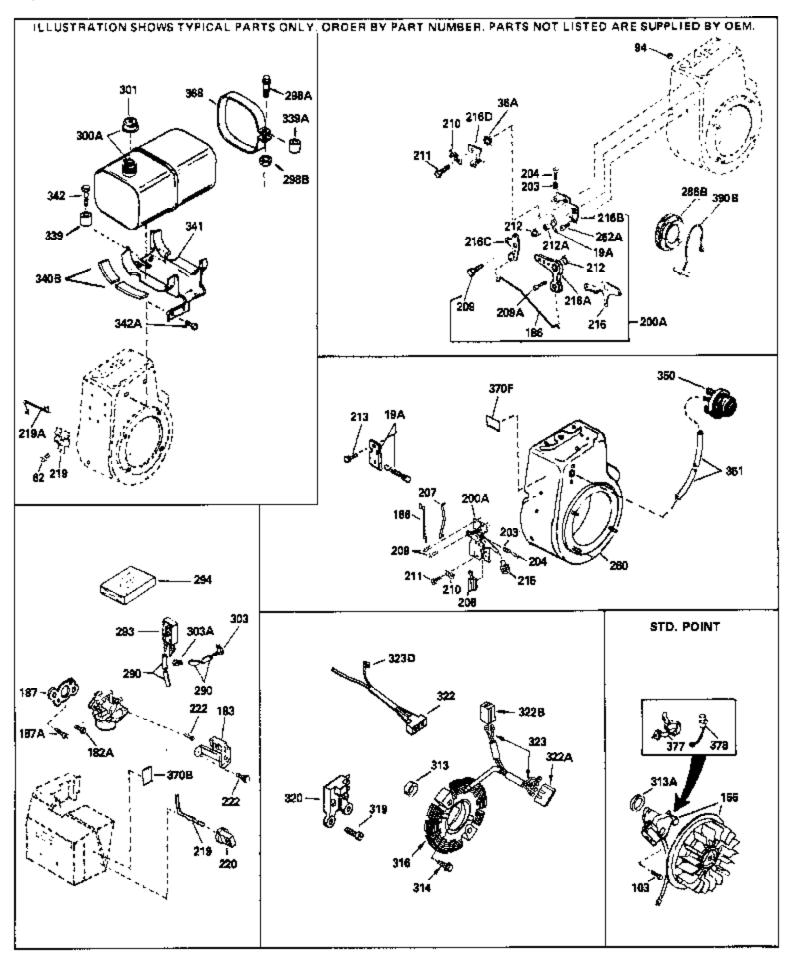

Ref #	Part Number	Qty	Description
62	650760		Screw, 8-32 x 3/8"
103	650814		Screw, Torx T-15, 10-24 x 1"
183	34587		Bracket, Choke
186	34667		Link, Governor
	34664		Control Bracket (Incl.19,203,204,206, 209)
	31342		Spring, Compression
	650549		Screw, 5-40 x 7/16"
	610973		
			Terminal Assy. (Use as required)
	33878		Link, Governor-to-throttle
	650821		Screw, 10-32 x 1/2"
	27793		Clip, Conduit
211	28942		Screw, 10-32 x 3/8"
219	34586		Rod, Choke
220	35438		Knob, Control
222	28820		Screw, 10-32 x 1/2"
	35447A		Blower Housing (For electric starter)
	35824		Muffler (Optional quiet muffler)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
004	0.404.0		,
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
			, . ,
	35189		Spacer, Coil
	650873		Screw, 1/4-20 x 3/4"
	611095		Alt.Coil (Incl.322E & 322D) (3 amp, A .C.)
	610823		Connector
323D	610822		Terminal, Male
339	35038		Spacer, Tank
341	34155		Bracket, Fuel tank mounting
	650561		Screw, 1/4-20 x 5/8"
	570682		Primer Assy.
	32180C		Primer Line
3700	34387		Decal, Instruction Can be used on HM80 with stamped steel
			recoil starter.
370.1	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	35570		Screen Seal (Can be used on HM80 with stamped steel
100	30070		recoil starter)
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
			,
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
			used on HM80 with stamped steel recoil starter)
111	25569		Dobric Scroon (Can be used an HMOO with stamped steel
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
∆ 13	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
710	00001		stamped steel recoil starter)
			Starriped Steel recoil Starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
			HM80 with die cast starter)
			, , , , , , , , , , , , , , , , , , , ,

Ref #	Part Number	Qty Description
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).