


D. ("	D the l	<u> </u>	
	Part Number	Qty	Description
	34348B		Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652		Pin, Dowel
4	30968		Nipple, Pipe
5	30969		Cap, Oil drain
15B	650494		Screw, 6-40 x 5/16"
15A	30700		Yoke, Governor
	30699C		Rod Assy., Governor (Incl. 15A & 15B)
	33454		Governor Lever Assy.
	29916		Clamp, Governor lever
	650548		Screw, 8-32 x 5/16"
	34663		Spring, Speed control
	32630		Seal, Oil
	35256A		
			Baffle, Blower housing
	650561		Screw, 1/4-20 x 5/8"
	35229		Crankshaft (Incl. 108 & 109)
	29826		Screw, 10-32 x 3/4"
	29918		Lockwasher, #8 E.T.
	30322		Locknut, Hex "Keps", 8-32
	29216		Nut & Lockwasher, 10-32 "Keps"
38	29642		Ring, Retaining
40	34552		Piston, Pin & Ring Set (Std.) (3-1/8")
40	34553		Piston, Pin & Ring Set (.010" OS)
40	34554		Piston, Pin & Ring Set (.020" OS)
41	34329A		Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
41	34330A		Piston & Pin Ass'y. (.010" OS)(Incl. 43)
41	34331A		Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332		Ring Set (Std.) (3-1/8" Bore)
	34333		Ring Set (.010" OS)
	34334		Ring Set (.020" OS)
	27888		Ring, Piston pin retaining
	32591C		Rod Assy., Connecting (Incl. 49)
	650662C		Bolt, Connecting rod (2 pieces)
	34034		÷ , , , ,
	34242		Lifter, Valve
			Dipper, Oil Complete (MCR) (Futended)
	34786		Camshaft (MCR) (Extended)
	33273A		Extension, Blower housing
	34126		Bracket, Grommet mounting
	650760		Screw, 8-32 x 3/8"
	28545		Grommet, Plastic
	650128		Screw, 10-24 x 1/2"
	35262		* Gasket, Cylinder cover
	34787		Cover, Cylinder (Incl. 71, 75 & 80)
	33368		Bushing, Crankshaft
72	27642		Plug, Oil drain
75	31950		Seal, Oil
76	28926		Seal, Oil
80	31845		Shaft, Mechanical governor
81	30590A		Washer, Flat
	30591		Gear Assy., Governor (Incl. 81)
	30588A		Spool, Governor
	29193		Ring, Retaining
	650833		Screw, 1/4-20 x 1-3/16"
	650832		Screw, 1/4-20 x 1-3/16"
	32589		·
			Key, Flywheel
	611091		Flywheel (w/ring gear)
	650815		Washer, Belleville
	650863		Nut, Hex (1/2-20) (Add-on alternator)
100	35135		Lamination Assy., Solid State

	D. (N.)	D. 1.6
	.	Description
	610118	Cover, Spark plug (Use as required)
	650872	Stud, Lamination mounting
	650814	Screw, Torx T-15, 10-24 x 1"
	29783	Pin, Crankshaft gear
	33245	Gear, Crankshaft
	35253	Ground Wire
119	34041A	* Gasket, Head
120	34030A	Head, Cylinder
125	27878A	Exhaust Valve (Std.) (Incl. 151)
125	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126	34035	Intake Valve (Std.) (Incl. 151)
126	34036	Intake Valve (1/32" OS) (Incl. 151)
	650691	Washer (Use as req., but not w/6021A screw)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	Screw, 5/16-18 x 2" (Use as required)
	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
130/1	0021A	650691 washer)
		000091 Washer)
131A	650713	Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028	Screw, 5/16-18 x 7/8" (Use as require d)
131	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	35862	Seal Assy., Intake valve
	27882	Cap, Upper valve spring
	27881	Spring, Valve
	32581	
	27896A	Cap, Lower valve spring
		* Gasket, Breather cover
	28423	Body, Breather
	28424	Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	33877	Pipe, Intake
203	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
210	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	35447A	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	35056	Muffler
2/50	35824	Muffler (Optional quiet muffler)


		Description
276	31588	Plate, Muffler locking
277	651002	Screw, 5/16-18 x 4-3/16"
277A	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
	32125	Cup, Starter
	35194	Screen, Starter
	29752	Nut & Lockwasher, 1/4-28
		•
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
		1 0 1
301	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
301	0 1 210	(1-3/16" I.D)
		(I-3/10 I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
305	33893A	Tube, Oil fill
	33590	"O" Ring
	34011A	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
		·
	35593	Ignition Key
	610973	Terminal Assy.
	35305	Wire, Ground
	650765	Screw, 10-32 x 1/2"
337	35057A	Cover, Carburetor
338	28942	Screw, 10-32 x 3/8"
340	34154	Plate, Fuel tank mounting
341	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	590574	Handle, Mitten grip
	650168	Washer, Flat
	34141	Guard, Starter
	32576	Seal, Snow guard
	33377	Bracket, Carburetor cover mounting
	650767	Screw, 8-32 x 27/64"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34416	Decal, Instruction
	34417	Decal, Primer
	34414	Decal, Warning
370E	35080	Decal, Instruction
379	631021	Inlet Needle, Seat & Clip Assy.
	632334A	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
		188 for breakdown or Fiche18A-1, Grid F-5)
390	590606	Rewind Starter (Refer to Division 5, Section C, page 30 for
		breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
		,

Ref #	Part Number	Qty	Description
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730225		SAE 30, 4-Cycle Engine Oil (Quart)
	730226		SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

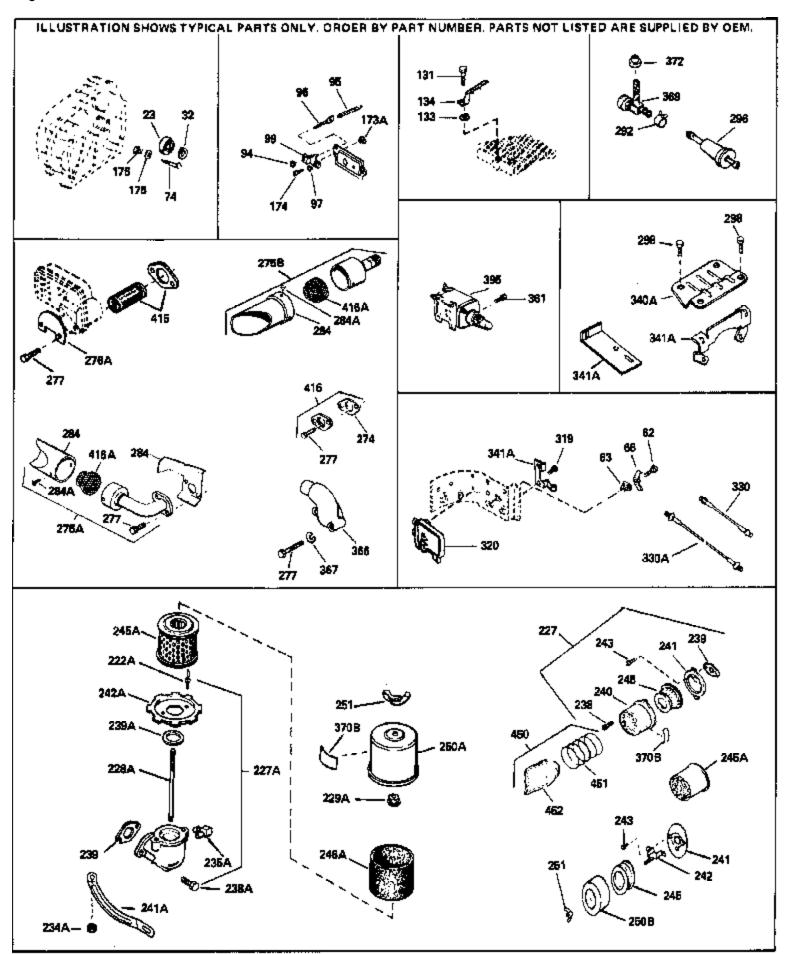

Pof #	Part Number Qt	/ Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97	31000	Lockwasher, Heavy split, #10 (Buy loc ally)
	650000	
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
227	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
		(Use as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
		• •
	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
245A	34700	Element, Air cleaner
	35865	Gasket, Exhaust (Use as required)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
ZIOD	001020	can be used on any model.)
		• ,
	35824	Muffler (Optional quiet muffler)
	651002	Screw, 5/16-18 x 4-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
330	35305	Wire, Ground
369	35857	Valve, Fuel shut-off
370B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
370.1	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
000	000202	motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
		NCI
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
100	0000	starter)
		,
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
111	0000	recoil starter)
		•
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on
120	. 5551 =	HM80 with die cast starter)
		,
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

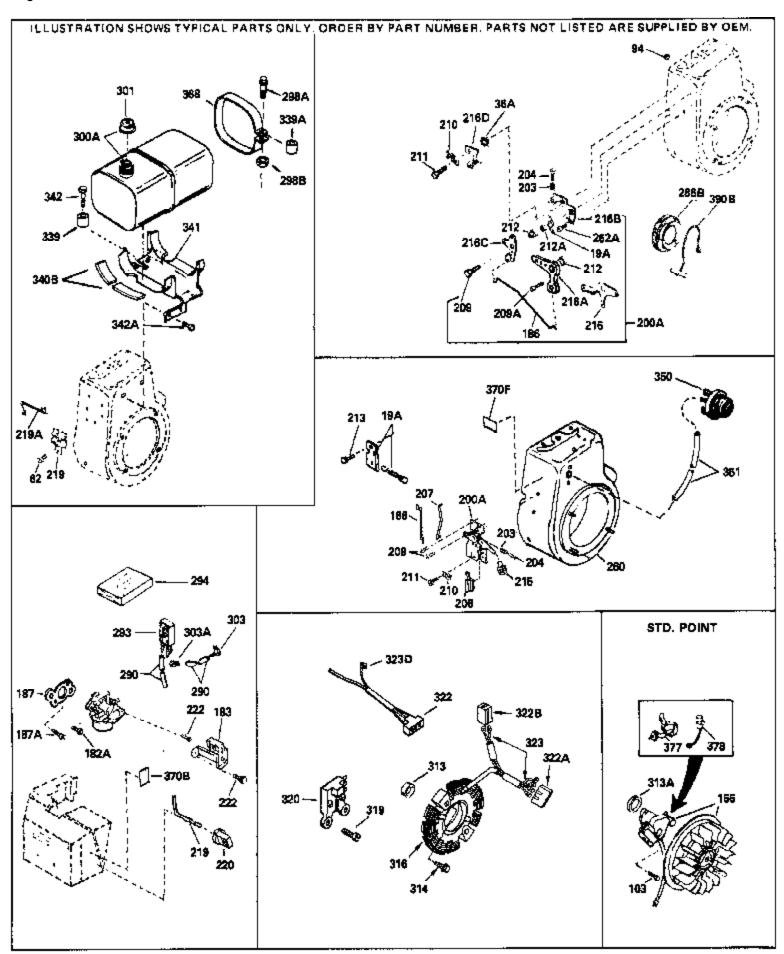

		Description
	650760	Screw, 8-32 x 3/8"
	650814	Screw, Torx T-15, 10-24 x 1"
	34587	Bracket, Choke
186	34667	Link, Governor
200A	34664	Control Bracket (Incl.19,203,204,206, 209)
203	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
209	650821	Screw, 10-32 x 1/2"
210	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	35447A	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
201	35355	Fuel Can (Pad plactic) (1.1/2" LD.)
	35038	Fuel Cap (Red plastic) (1-1/2" I.D.)
		Spacer, Tank Procket Fire tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570682	Primer Assy.
	32180C	Primer Line
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
3/0B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	2550	Chapter (Can be used on LIMOO with stamped steel receil
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
111	2550	Dahria Saraan (Can be used an HM90 with atomped atom
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
40 E	720572	•
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
400	644077	•
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
		Handbook for installation instructions).

Ref # Part Number 431 590609	Qty Description Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431 590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432 611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432 611079	 D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).